INTERNATIONAL STANDARD

ISO 14121-1

First edition 2007-09-01

Safety of machinery — Risk assessment —

Part 1: **Principles**

Sécurité des machines — Appréciation du risque —

iTeh STPartie 1) Principes PREVIEW (standards.iteh.ai)

ISO 14121-1:2007 https://standards.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d-57f6527510ab/iso-14121-1-2007



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 14121-1:2007 https://standards.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d-57f6527510ab/iso-14121-1-2007



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Page

Contents

Forewo	ord	iv
Introductionv		
1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4 4.1 4.2	General principles	4
5 5.1 5.2 5.3 5.4 5.5	Determination of limits of machinery	6 7 7 7
6	Hazard identification STANDARD PREVIEW	8
7 7.1 7.2 7.3	Risk estimation General (Standards.iteh.ai) Elements of risk Aspects to be considered during risk estimation	9 9 12
8 8.1 8.2 8.3	Risk evaluation://standards.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d- General 57f6527510ab/iso-14121-1-2007 Achievement of adequate risk reduction Comparison of risks	13 14
9	Documentation	15
Annex	A (informative) Examples of hazards, hazardous situations and hazardous events	16
Bibliog	ıraphy	28

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14121-1 was prepared by Technical Committee ISO/TC 199, Safety of machinery.

This first edition of ISO 14121-1 cancels and replaces ISO 14121:1999, of which it constitutes a technical revision.

ISO 14121 consists of the following parts, under the general title *Safety of machinery* — *Risk assessment*:

- Part 1: Principles ISO 14121-1:2007 https://standards.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d-
- Part 2: Practical guidance and examples of methods [Technical Report]

Introduction

The structure of safety standards in the field of machinery is as follows.

- a) Type-A standards (basic standards) give basic concepts, principles for design, and general aspects that can be applied to machinery.
- b) Type-B standards (generic safety standards) deal with one or more safety aspect(s) or one or more type(s) of safeguards that can be used across a wide range of machinery:
 - type-B1 standards on particular safety aspects (e.g. safety distances, surface temperature, noise);
 - type-B2 standards on safeguards (e.g. two-hands controls, interlocking devices, pressure sensitive devices, guards).
- c) Type-C standards (machine safety standards) deal with detailed safety requirements for a particular machine or group of machines.

This part of ISO 14121 is a type-A standard as stated in ISO 12100-1.

When provisions of a type-C standard are different from those which are stated in type-A or type-B standards, the provisions of the type-C standard take precedence over the provisions of the other standards for machines that have been designed and built according to the provisions of the type-C standard.

This part of ISO 14121 gives guidance for decisions related to the design of machinery and will assist in the preparation of consistent and appropriate type-B and type-C standards, so that machines can be produced that are safe for their intended use in accordance with the methodology given in ISO 12100.

Annex A gives, in separate tables, examples of hazards, hazardous situations and hazardous events, so as to clarify these concepts and assist the designer in the process of hazard identification.

The practical use of a number of methods for each stage of risk assessment is described ISO/TR 14121-2, which also gives some guidance on how the selection of protective measures (in accordance with ISO 12100) can reduce the different elements of risk in relation to Figure 2 of this part of ISO 14121.

This part of ISO 14121 can be incorporated in training courses and manuals where appropriate to give basic instruction on risk assessment.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 14121-1:2007 https://standards.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d-57f6527510ab/iso-14121-1-2007

Safety of machinery — Risk assessment —

Part 1:

Principles

1 Scope

This part of ISO 14121 establishes general principles intended to be used to meet the risk reduction objectives established in ISO 12100-1:2003, Clause 5. These principles of risk assessment bring together knowledge and experience of the design, use, incidents, accidents and harm related to machinery in order to assess the risks posed during the relevant phases of the life cycle of a machine.

This part of ISO 14121 provides guidance on the information that will be required to enable risk assessment to be carried out. Procedures are described for identifying hazards and estimating and evaluating risk.

It also gives guidance on the making of decisions relating to the safety of machinery and on the type of documentation required to verify the risk assessment carried out.

It is not applicable to risks posed to domestic animals, property or the environment.

ISO 14121-1:2007

2 Normative references ls.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d-57f6527510ab/iso-14121-1-2007

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12100-1:2003, Safety of machinery — Basic concepts, general principles for design — Part 1: Basic terminology, methodology

ISO 12100-2:2003, Safety of machinery — Basic concepts, general principles for design — Part 2: Technical principles and specifications

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

harm

physical injury or damage to health

[ISO 12100-1:2003, definition 3.5]

3.2

hazard

potential source of harm

NOTE 1 The term "hazard" can be qualified in order to define its origin (e.g. mechanical hazard, electrical hazard) or the nature of the potential harm (e.g. electric shock hazard, cutting hazard, toxic hazard, fire hazard).

NOTE 2 The hazard envisaged in this definition:

- either is permanently present during the intended use of the machine (e.g. motion of hazardous moving elements, electric arc during a welding phase, unhealthy posture, noise emission, high temperature);
- or can appear unexpectedly (e.g. explosion, crushing hazard as a consequence of an unintended / unexpected startup, ejection as a consequence of a breakage, fall as a consequence of acceleration / deceleration)

[ISO 12100-1:2003, definition 3.6]

3.3

hazard zone

danger zone

any space within and/or around machinery in which a person can be exposed to a hazard

[ISO 12100-1:2003, definition 3.10]

3.4

hazardous event

event that can cause harm

iTeh STANDARD PREVIEW

NOTE A hazardous event can occur over a short period of time or over an extended period of time.

3.5

hazardous situation

ISO 14121-1:2007

circumstance in which a person is exposed to at least one nazard 78b766d0-1fae-4479-843d-57f6527510ab/iso-14121-1-2007

NOTE The exposure can result in harm immediately or over a period of time.

[ISO 12100-1:2003, definition 3.9]

3.6

intended use of a machine

use of a machine in accordance with the information provided in the instructions for use

[ISO 12100-1:2003, definition 3.22]

3.7

machinery

machine

assembly of linked parts or components, at least one of which moves, with the appropriate machine actuators, control and power circuits, joined together for a specific application, in particular for the processing, treatment, moving or packaging of a material

NOTE The term "machinery" also covers an assembly of machines which, in order to achieve the same end, are arranged and controlled so that they function as an integral whole.

[ISO 12100-1:2003, definition 3.1]

3.8

malfunction

failure of a machine to perform an intended function

NOTE For examples, see ISO 12100-1:2003, 5.3 b), item 2).

3.9

protective measure

measure intended to achieve risk reduction

NOTE 1 It is implemented:

- by the designer (inherently safe design, safeguarding and complementary protective measures, information for use);
- or by the user (organization: safe working procedures, supervision, permit-to-work systems; provision and use of additional safeguards; use of personal protective equipment; training).

NOTE 2 See ISO 12100-1:2003, Figure 1.

[ISO 12100-1:2003, definition 3.18]

3.10

reasonably foreseeable misuse

use of a machine in a way not intended by the designer, but which may result from readily predictable human behaviour

[ISO 12100-1:2003, definition 3.23]

3.11

residual risk

risk remaining after protective measures have been taken

NOTE See ISO 12100-1:2003, Figure 1.

(standards.iteh.ai)

[ISO 12100-1:2003, definition 3.12]

3.12 risk

ISO 14121-1:2007

https://standards.iteh.ai/catalog/standards/sist/78b766d0-1fae-4479-843d-

combination of the probability of occurrence of harm and the severity of that harm

[ISO 12100-1:2003, definition 3.11]

3.13

risk analysis

combination of the specification of the limits of the machine, hazard identification and risk estimation

[ISO 12100-1:2003, definition 3.14]

3.14

risk assessment

overall process comprising a risk analysis and a risk evaluation

[ISO 12100-1:2003, definition 3.13]

3.15

risk estimation

definition of likely severity of harm and probability of its occurrence

[ISO 12100-1:2003, definition 3.15]

3.16

risk evaluation

judgement, on the basis of risk analysis, of whether the risk reduction objectives have been achieved

[ISO 12100-1:2003, definition 3.16]

3.17

task

specific activity performed by one or more persons on or in the vicinity of the machine during its lifecycle

4 General principles

4.1 Basic concepts

Risk assessment is a series of logical steps to enable, in a systematic way, the analysis and evaluation of the risks associated with machinery. Risk assessment is followed, whenever necessary, by risk reduction as described in ISO 12100-1:2003, Clause 5. Iteration of this process can be necessary to eliminate hazards as far as practicable and to adequately reduce risks by the implementation of protective measures.

Risk assessment includes the following (see Figure 1):

- a) risk analysis:
 - 1) determination of the limits of the machinery (see Clause 5);
 - hazard identification (see Clause 6);
 - 3) risk estimation (see Clause 7);

b) risk evaluation (see Clause 8) eh STANDARD PREVIEW

Risk analysis provides information required for the risk evaluation, which in turn allows judgements to be made about whether or not risk reduction is required.

These judgments shall be supported by a qualitative, of where appropriate, a quantitative, estimate of the risk associated with the hazards present on the machinery standards/sist/8b/66d0-1fae-4479-843d-576527510ab/iso-14121-1-2007

NOTE A quantitative approach can be appropriate when useful data is available. However, a quantitative approach is restricted by the useful data that are available and/or the limited resources of those conducting the risk assessment. Therefore, in many applications, only qualitative risk estimation will be possible.

The risk assessment shall be conducted so that it is possible to document the procedure that has been followed and the results that have been achieved (see Clause 9).

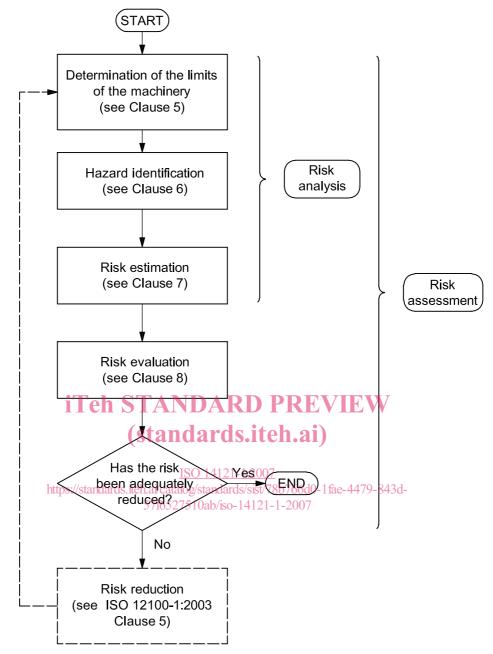


Figure 1 — Iterative process for reducing risk

4.2 Information for risk assessment

The information for risk assessment should include the following:

- a) related to machinery description:
 - 1) user specifications;
 - 2) anticipated machinery specifications, including
 - i) description of the various phases of the whole life cycle of the machinery,
 - ii) design drawings or other means of establishing the nature of the machinery, and
 - ii) required energy sources and how they are supplied;

ISO 14121-1:2007(E)

- 3) documentation on previous designs of similar machinery, if relevant;
- 4) information for use of the machinery, as available;
- b) related to regulations, standards and other applicable documents:
 - 1) applicable regulations;
 - 2) relevant standards;
 - 3) relevant technical specifications;
 - 4) safety data sheets;
- c) related to experience of use:
 - 1) any accident, incident or malfunction history of the actual or similar machinery;
 - 2) the history of damage to health resulting, for example, from emissions (noise, vibration, dust, fumes, etc.), chemicals used or materials processed by the machinery.

NOTE An incident that has occurred and resulted in harm can be referred to as an "accident", whereas an incident that has occurred and that did not result in harm can be referred to as a "near miss" or "dangerous occurrence".

d) Relevant ergonomic principles (see ISO 12100-2:2003, 4.8). PREVIEW

The information shall be updated as the design develops or when modifications to the machine are required.

Comparisons between similar hazardous situations associated with different types of machinery are often possible, provided that sufficient information about hazards and accident circumstances in those situations is available.

57f6527510ab/iso-14121-1-2007

The absence of an accident history, a small number of accidents or low severity of accidents should not be taken as a presumption of a low risk.

For quantitative analysis, data from data bases, handbooks, laboratories or manufacturers' specifications may be used, provided that there is confidence in the suitability of the data. Uncertainty associated with these data shall be indicated in the documentation (see Clause 9).

5 Determination of limits of machinery

5.1 General

Risk assessment begins with the determination of the limits of the machinery, taking into account all the phases of the machinery life. This means that the characteristics and performances of the machine or a series of machines in an integrated process, and the related people, environment and products, should be identified in terms of the limits of machinery as given in 5.2 to 5.6.