

# SLOVENSKI STANDARD SIST EN 12999:2011+A1:2012

01-oktober-2012

Nadomešča:

SIST EN 12999:2011

Žerjavi - Nakladalni žerjavi (vključno z dopolnilom A1)

Cranes - Loader cranes

Krane - Ladekrane

iTeh STANDARD PREVIEW

Appareils de levage à charge suspendue - Grues de chargement (standards.iteh.ai)

Ta slovenski standard je istoveten z:N 129/EN 12999:2011+A1:2012

https://standards.iteh.ai/catalog/standards/sist/7bd7f0d6-845f-41cf-acc0-

-0061ace6f034/sist en 12999-2011a1-2012

ICS:

53.020.20 Dvigala Cranes

SIST EN 12999:2011+A1:2012 en,fr,de

SIST EN 12999:2011+A1:2012

# iTeh STANDARD PREVIEW (standards.iteh.ai)

EUROPEAN STANDARD

EN 12999:2011+A1

NORME EUROPÉENNE EUROPÄISCHE NORM

June 2012

ICS 53.020.20

Supersedes EN 12999:2011

#### **English Version**

# Cranes - Loader cranes

Appareils de levage à charge suspendue - Grues de chargement

Krane - Ladekrane

This European Standard was approved by CEN on 10 December 2010 and includes Amendment 1 approved by CEN on 13 May 2012.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

<u>SIST EN 12999:2011+A1:2012</u> https://standards.iteh.ai/catalog/standards/sist/7bd7f0d6-845f-41cf-acc0-0061ace6f034/sist-en-12999-2011a1-2012



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Cont	<b>Contents</b> Pag				
Forewo	ord	5			
Introdu	uction	6			
1	Scope	7			
-	•				
2	Normative references				
3	Terms, definitions and terminology				
3.1	Terms and definitions				
3.2	Terminology				
4	List of significant hazards	14			
5	Safety requirements and/or safety measures	17			
5.1	General				
5.2	Structural calculation				
5.2.1	Information to be given in the calculation				
5.2.2	Dynamic factors				
5.2.3 5.2.4	Loads and forces				
5.2.4 5.3	Load combinations Stress analysis iTeh STANDARD PREVIEW	22			
5.4	Mochanical arrangements	23			
5.4.1	Mechanical arrangements	23			
5.4.2	Manual boom extensions	24			
5.4.3	Securing for transport	24			
5.4.4	Hoists SISTEN 12999:2011+A1:2012	24			
5.4.5	Load hooks https://standards.iten.ai/catalog/standards/sist//bd/fUd6-845f-41cf-accu-	24			
5.5	Securing for transport	25			
5.5.1	General				
5.5.2	Pump				
5.5.3 5.5.4	Hydraulic reservoir				
5.5.4 5.5.5	Pressure limiting device				
5.5.6	Precautions against hydraulic line rupture				
5.5.7	Sink rate for boom system				
5.5.8	Slewing mechanism				
5.6	Limiting and indicating devices				
5.6.1	General	27			
5.6.2	Rated capacity limiter				
5.6.3	Lowering facility				
5.6.4	Rated capacity indicators				
5.6.5	Limiters				
5.6.6 5.6.7	Operational warningAcoustic warning				
5.6.8	Stopping device				
5.7	Controls				
5.7.1	General				
5.7.2	Symbols				
5.7.3	Layout of bi-directional controls				
5.7.4	Guidance for high seat controls				
5.8	Control stations				
5.8.1	General				
5.8.2	Raised control stations				
5.9	Electrical systems				
5.9.1	General	33 33			

5.10	Installation	
5.10.1 5.10.2	General	
5.10.2 5.10.3	Mounting Stability	
5.10.4	Noise	
5.10.5	Vibrations	
5.10.6	Electrical systems (installation)	
5.10.7 5.10.8	Hydraulic componentsAccess	
_		
6 6.1	Verification of the safety requirements and/or measures	
6.2	Testing and test procedures	
6.2.1	General	
6.2.2	Functional test	_
6.2.3 6.2.4	Static test	
6.2. <del>5</del>	Stability test	
6.2.6	Test documentation	42
6.3	Noise emission measurement	43
7	Information for use	43
7.1	General	
7.2	Manuals	_
7.2.1 7.2.2	Provision of manuals	
7.2.3		
7.2.4	Operator's manual STANDARD PREVIEW  Maintenance manual STANDARD PREVIEW	45
7.3	Marking (Standards.iteh.ai)	45
7.3.1 7.3.2	Manufacturer's plate	
7.3.2 7.3.3	Installer's plate SISTEN 12999:2011+A1:2012	
7.3.4	Load signs. https://standards.iteh.ai/catalog/standards/sist/7bd7fDd6-845f-41cf-acc0-	46
7.3.5	Special signs on timber handling cranes 12000-2011a1-2012	
7.3.6	Marking of slewing centre	
	A (informative) Examples of configurations and mountings	
A.1	Boom systems	
A.1.1 A.1.2	Loader cranes with straight boom system  Loader cranes with articulated boom system	
A.2	Examples of loader crane mountings	
Δηηργ	B (informative) Stress history parameter s and stress history classes S	
Annex C.1	C (informative) Explanatory notes	
C.2	Timber handling cranes - Line rupture	
C.3	Control stations	
Annex	D (informative) Examples of dangerous movements	59
	E (normative) Symbols for working and setting-up functions	
	F (informative) Control system – Preferred vertical layout for controls operated from the	. 00
Annex	ground	62
Annex	G (informative) Control system - Horizontal layout order	
	H (informative) Control levers for high seats and remote controls	
H.1	High seat controls	
H.1.1	Multidirectional (joy-stick) controls	67
H.1.2	Bi-directional controls	
H.2	Remote controls	
Annex	I (not used)	70

Annex J (normative) Cabins fitted on vehicle mounted loader cranes up to a net lifting moment 250 kNm	
Annex K (informative) Examples of raised control stations	74
Annex L (normative) Raised control stations - Measures regarding hand rails and hand holds, ladders and steps	70
Annex M (informative) Installation of a loader crane on a vehicle	
M.2 Installation: minimum data	79
M.2.1 Crane dimensions in transport position: data	79
M.2.2 Crane data (see Figure M.2)	80
M.2.3 Mounting data	
M.2.4 Power requirements	
M.2.5 Stability calculations: data	
M.3 Power take off (PTO) and pump displacement	
M.4 Calculation method for determination of sub-frame dimensions	
M.4.1 General considerations	
M.4.2 Stresses	
M.4.3 Material and limit states	
M.4.4 Symbols and equations	83
Annex N (informative) Selection of a suitable set of crane standards for a given application	8
Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 2006/42/EC	
BibliographyTeh STANDARD PREVIEW	
(standards.iteh.ai)	

# **Foreword**

This document (EN 12999:2011+A1:2012) has been prepared by Technical Committee CEN/TC 147 "Cranes - Safety", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2012, and conflicting national standards shall be withdrawn at the latest by December 2012.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document includes Amendment 1 approved by CEN on 13 May 2012.

This document supersedes (A) EN 12999:2011 (A).

The start and finish of text introduced or altered by amendment is indicated in the text by tags  $A_1$   $A_2$ .

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU/Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

# Introduction

This European Standard is a harmonized standard to provide one means for loader cranes to conform to the essential health and safety requirements of the Machinery Directive 2006/42/EC.

This European Standard is a type C standard as stated in EN ISO 12100.

When provisions of this type C standard are different from those which are stated in type A or B standards, the provisions of this type C standard take precedence over the provisions of the other standards, for machines that have been designed and built according to the provisions of this type C standard.

The machinery concerned and the extent to which hazards are covered are indicated in the scope of this European Standard.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

# 1 Scope

This European Standard specifies minimum requirements for design, calculation, examinations and tests of hydraulic powered loader cranes and their mountings on vehicles or static foundations.

This European Standard does not apply to loader cranes used on board ships or floating structures or to articulated boom system cranes which are designed as total integral parts of special equipment such as forwarders.

The hazards covered by this standard are identified in Clause 4.

This European Standard does not cover hazards related to the lifting of persons.

This European Standard is not applicable to loader cranes which are manufactured before the date of its publication as EN.

NOTE The use of cranes for lifting of persons can be subject to specific national regulations.

#### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies. (4)

EN 349:1993+A1:2008, Safety of machinery — Minimum gaps to avoid crushing of parts of the human body

EN 12077-2:1998+A1:2008, Cranes safety — Requirements for health and safety — Part 2: Limiting and indicating devices <u>SIST EN 12999:2011+A1:2012</u>

https://standards.iteh.ai/catalog/standards/sist/7bd7f0d6-845f-41cf-acc0-

EN 14492-2:2006+A1:2009, Cranes lac Power driven winches and hoists — Part 2: Power driven hoists

EN 12644-1:2001+A1:2008, Cranes – Information for use and testing — Part 1: Instructions

EN 12644-2:2000+A1:2008, Cranes — Information for use and testing — Part 2: Marking

EN 13001-1:2004+A1:2009, Cranes — General design — Part 1: General principles and requirements

EN 13001-2:2004+A3:2009, Cranes safety — General design — Part 2: Load effects

prEN 13001-3-1:2010, Cranes — General design — Part 3-1: Limit states and proof competence of steel structure

EN 13557:2003+A2:2008, Cranes — Controls and control stations

EN 13586:2004+A1:2008, Cranes — Access

EN 61000-6-2:2005, Electromagnetic compatibility (EMC) — Part 6-2: Generic standards — Immunity for industrial environments (IEC 61000-6-2:2005)

EN 61000-6-4:2007, Electromagnetic compatibility (EMC) — Part 6-4: Generic standards — Emission standard for industrial environments (IEC 61000-6-4:2006)

EN 60204-32:2008, Safety of machinery — Electrical equipment of machines — Part 32: Requirements for hoisting machines (IEC 60204-32:2008)

EN 954-1:1996, Safety of machinery — Safety related parts of control systems — Part 1: General principles for design

EN ISO 3744:2010, Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Engineering methods for an essentially free field over a reflecting plane (ISO 3744:2010)

EN ISO 4413:2010, Hydraulic fluid power — General rules and safety requirements for systems and their components (ISO 4413:2010)

EN ISO 4871:2009, Acoustics — Declaration and verification of noise emission values of machinery and equipment (ISO 4871:1996)

EN ISO 5353:1998, Earth-moving machinery and tractors and machinery for agriculture and forestry — Seat index point (ISO 5353:1995)

EN ISO 11201:2010, Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions in an essentially free field over a reflecting plane with negligible environmental corrections (ISO 11201:2010)

EN ISO 11688-1:2009, Acoustics — Recommended practice for the design of low-noise machinery and equipment — Part 1: Planning (ISO/TR 11688-1:1995)

EN ISO 12100:2010, Safety of machinery — General principles for design — Risk assessment and risk reduction (ISO 12100:2010)

EN ISO 13857:2008, Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs (ISO 13857:2008)

# iTeh STANDARD PREVIEW

# 3 Terms, definitions and terminologydards.iteh.ai)

#### 3.1 Terms and definitions

SIST EN 12999:2011+A1:2012

https://standards.iteh.ai/catalog/standards/sist/7bd7f0d6-845f-41cf-acc0-

For the purposes of this document, the terms and definitions given in-EN ISO 12100:2010 and the following apply. 1)

#### 3.1.1

#### loader crane

powered crane comprising a column, which slews about a base, and a boom system which is attached on to the top of the column, usually fitted on a commercial vehicle (including trailer) with a significant residual load carrying capability, and being designed for loading and unloading the vehicle as well as for other duties as specified by the manufacturer in the operator's manual

- NOTE 1 A loader crane, as defined above in 3.1.1, installed on a static foundation is still considered a loader crane.
- NOTE 2 Annex A gives examples of configuration and mountings.

#### 3.1.2

#### articulated movement

movement of boom members pivoting about a pin joint

#### 3.1.3

#### base

housing incorporating anchoring points and bearings for the slewing column

<sup>1)</sup> For convenience of reference the definitions are - with the exception of 3.1.1 loader crane - grouped in alphabetical order in the English version.

#### 3.1.4

#### boom

structural member in the boom system of the loader crane

#### 3.1.5

## boom extension, hydraulic

part of the boom which is capable of hydraulic telescopic movement to vary its length

#### 3 1 6

#### boom extension, manual

part of the boom which can be manually extended or retracted

#### 3.1.7

#### boom system

complete system, consisting of booms, boom extensions and cylinders

#### 3.1.8

#### column

structural member which supports the boom system

#### 3.1.9

#### control system

control station

interface between the operating levers and the actuating components which provide movements of the loader crane

#### 3.1.10

# iTeh STANDARD PREVIEW

position from which the loader crane may be operated iteh.ai)

#### 3.1.11

# crane inclination

SIST EN 12999:2011+A1:2012

angle between the slewing axis and a vertical line, due to working on slanted or uneven ground 0061ace6f034/sist-en-12999-2011a1-2012

## 3.1.12

#### danger zone

any space within and/or around machinery in which a person can be exposed to a hazard

[EN ISO 12100:2010]

#### 3.1.13

#### dead load

force due to masses of fixed and movable crane parts which act permanently on the structure while the crane is being used

## 3.1.14

#### dynamic pressure

pressure in a hydraulic system component or part of hydraulic system caused by dynamic forces on actuators when handling the load

#### 3.1.15

#### fixed load lifting attachment

equipment from which the net load may be suspended and which is fitted directly to the boom head as an integral part of the crane

A1) deleted text (A1)

#### 3.1.16

# flow sensitive check valve

valve which stops the flow when a pre-set pressure drop level is exceeded

#### 3.1.17

#### gross load

sum of payload, lifting attachments and if applicable a portion of the hoist rope

#### 3.1.18

## high seat

control station connected to the column, consequently rotating with the crane

#### 3.1.19

#### hoist

machines for lifting and lowering suspended loads over predetermined distances, using ropes, chains or belts

#### 3.1.20

#### hydraulic line rupture

failure of a hydraulic line which results in a loss of pressure in the line

#### 3.1.21

#### load holding valve

valve which is normally closed and is opened by an external force to enable flow of fluid out of a hydraulic actuator

#### 3.1.22

#### main relief valve

maximum working load

valve which limits the pressure supplied to the hydraulic system of the crane

#### 3.1.23

# iTeh STANDARD PREVIEW

the maximum load that may be lifted

(standards.iteh.ai)

NOTE The largest load appearing in the load plate.

SIST EN 12999:2011+A1:2012

3.1.24 https://sta

https://standards.iteh.ai/catalog/standards/sist/7bd7f0d6-845f-41cf-acc0-

maximum working pressure 0061ace6f034/sist-en-12999-2011a1-2012

maximum pressure in pump circuit or individual working function

#### 3.1.25

## net lifting moment

rated capacity multiplied by outreach

## 3.1.26

#### non-fixed load lifting attachment

lifting accessory which can be fitted directly or indirectly to the hook or any other coupling device of a crane by the user without affecting its integrity

#### 3.1.27

#### outreach

horizontal distance between the axis of rotation of the column and point of load attachment

#### 3.1.28

#### outreach, hydraulic

outreach which can be obtained with hydraulically actuated parts of the boom system

# 3.1.29

#### payload

load which is lifted by the crane and suspended from the non-fixed load-lifting attachment(s) or, if such an attachment is not used, directly from the fixed load-lifting attachment(s)

#### 3.1.30

# port relief valve

valve which limits the pressure supplied to a hydraulic actuator

#### 3.1.31

#### pressure relief valve

valve which automatically relieves the hydraulic oil to the tank when the pressure exceeds a specified value

#### 3.1.32

#### raised control station

control station at a height above the ground level, i.e. a high seat attached to the column of the loader crane or a platform positioned above the base of the loader crane (see Annex K)

#### 3.1.33

# rated capacity

load that the crane is designed to lift for a given operating condition (e.g. configuration, position of the load)

#### 3.1.34

#### rated capacity indicator

device which gives, within tolerance limits specified in 5.6.2.1, at least a continuous indication that the rated capacity is exceeded, and another continuous indication (on certain crane types) of the approach to the rated capacity

#### 3.1.35

# rated capacity limiter

system that automatically prevents the crane from handling loads in excess of its rated capacity, see also C.1

#### 3.1.36

#### setting-up function

crane function used to prepare the crane for lifting RD PREVIEW

#### 3.1.37

# (standards.iteh.ai)

#### sink rate

distance in a given time at which the load lowers due to internal leakage of hydraulic components

3.1.38 https://standards.iteh.ai/catalog/standards/sist/7bd7f0d6-845f-41cf-acc0-

**slewing** 0061ace6f034/sist-en-12999-2011a1-2012

rotational movement of the column and boom system about the axis of the column

#### 3.1.39

#### stabilizer

aid to the supporting structure connected to the base of the crane or to the vehicle to provide stability, without lifting the vehicle from the ground

#### 3.1.40

## stabilizer extension

part of the stabilizer capable of extending the stabilizer leg laterally from the transport position to the operating position

#### 3.1.41

# stabilizer leg

part of a stabilizer capable of contacting the ground to provide the required stability

#### 3.1.42

# static foundation

fixed support incorporating mounting points for a crane

#### 3.1.43

## timber handling crane

loader crane specifically designed, manufactured and equipped with a grapple for loading/unloading of unprepared timber (e.g. tree trunks, branches)

NOTE The operator controls the crane from a high seat or from a cabin.

## 3.1.44

# total lifting moment


sum of net lifting moment and the moment produced by dead loads


# 3.2 Terminology

The terms which are used in this European Standard for the main parts of a loader crane are indicated in Figure 1.

Boom system consists of items 6 to 12 plus items 16 to 22, if applicable.

# iTeh STANDARD PREVIEW (standards.iteh.ai)



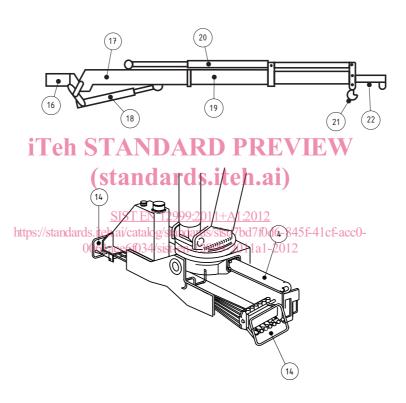

# Key

1	base	7 1 <sup>st</sup> boom cylinder	13 hook	19 boom extension, hydraulic
2	stabilizer extension	8 2 <sup>nd</sup> boom	14 controls	20 extension cylinders
3	stabilizer leg	9 2 <sup>nd</sup> boom cylinder	15 stabilizer foot	21 hook
4	slewing mechanism	<ol> <li>boom extension, hydraulic</li> </ol>	16 3 <sup>rd</sup> boom adapter	22 boom extension, manual
5	column	11 extension cylinders	17 3 <sup>rd</sup> boom	
6	1 <sup>st</sup> boom	12 boom extension,	18 3 <sup>rd</sup> boom cylinder	

Figure 1 — Main parts of a loader crane