
Aeronavtika - Kabelske spojke za vezalno pasovje - 004. del: Plastične vezice - Delovne temperature med -55 °C do 105 °C in -55 °C do 150 °C - Standard za proizvod

Aerospace series - Cable ties for harnesses - Part 004: Plastic cable ties - For operating temperatures - 55 °C to 105 °C and - 55 °C to 150 °C - Product standard

Luft- und Raumfahrt - Befestigungsbänder für Leitungsbündel - Teil 004: Kabelbinder aus Kunststoff - Betriebstemperatur - 55 °C bis 105 °C und - 55 °C bis 150 °C - Produktnorm
(standards.iteh.ai)

Série aérospatiale - Frettes de câblage pour harnais - Partie 004: Frettes en plastique - Températures d'utilisation - 55 °C à 105 °C et - 55 °C à 150 °C - Norme de produit

Ta slovenski standard je istoveten z: EN 4056-004:2014

ICS:

49.060	Letalska in vesoljska električna oprema in sistemi	Aerospace electric equipment and systems
--------	--	--

SIST EN 4056-004:2015

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 4056-004:2015

<https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015>

EUROPEAN STANDARD

EN 4056-004

NORME EUROPÉENNE

EUROPÄISCHE NORM

December 2014

ICS 49.060

English Version

Aerospace series - Cable ties for harnesses - Part 004: Plastic cable ties - For operating temperatures - 55 °C to 105 °C and - 55 °C to 150 °C - Product standard

Série aérospatiale - Frettes de câblage pour harnais - Partie 004: Frettes en plastique - Températures d'utilisation - 55 °C à 105 °C et - 55 °C à 150 °C - Norme de produit

Luft- und Raumfahrt - Befestigungsbänder für Leitungsbündel - Teil 004: Kabelbinder aus Kunststoff - Betriebstemperatur - 55 °C bis 105 °C und - 55 °C bis 150 °C - Produktnorm

This European Standard was approved by CEN on 11 October 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents		Page
Foreword.....		3
1 Scope		4
2 Normative references		4
3 Terms and definitions		4
4 Required characteristics		4
5 Tests and requirements		6
6 Quality assurance		8
7 Designation		8
8 Marking		8
9 Packaging and storage		8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4056-004:2015](https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015)

<https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015>

Foreword

This document (EN 4056-004:2014) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2015, and conflicting national standards shall be withdrawn at the latest by June 2015.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4056-004:2015](https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015)

<https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015>

EN 4056-004:2014 (E)**1 Scope**

This European Standard defines the characteristics of cable ties with either internal or external serrations manufactured entirely from plastics material, for installation under controlled tension on aircraft cable harnesses. It shall be used together with EN 4056-001.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2825, *Aerospace series — Burning behaviour of non metallic materials under the influence of radiating heat and flames — Determination of smoke density*

EN 2826, *Aerospace series — Burning behaviour of non metallic materials under the influence of radiating heat and flames — Determination of gas components in the smoke*

EN 4056-001, *Aerospace series — Cable ties for harnesses — Part 001: Technical specification*

EN 4056-002, *Aerospace series — Cable ties for harnesses — Part 002: Index of products*

EN 4057 (all parts), *Aerospace series — Cable ties for harnesses — Test methods*

MS 90387, *Tool, hand, adjustable for plastic and metal tie down straps*¹⁾

3 Terms and definitions

(standards.iteh.ai)

For the purposes of this document, the terms and definitions given in EN 4056-001 apply.

4 Required characteristics

<https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015>

4.1 Dimensions

See Figure 1 and Table 1.

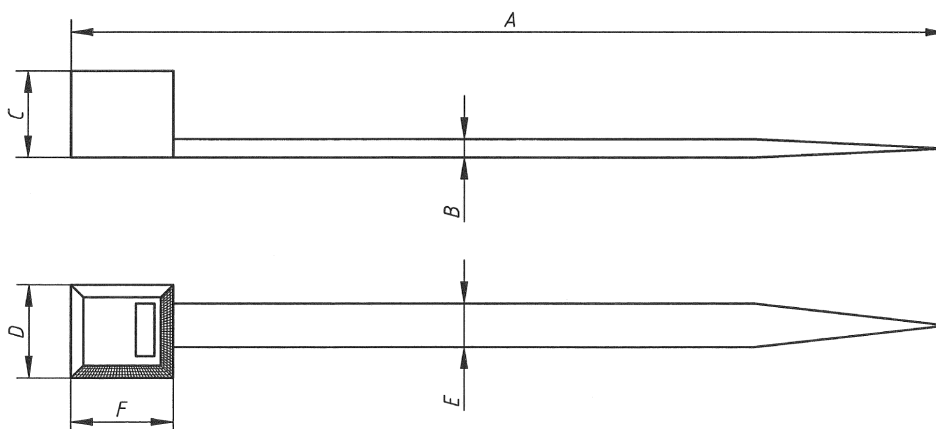


Figure 1 — Cable tie

¹⁾ Published by: DoD National (US) Mil. Department of Defense (<http://www.defenselink.mil/>).

Table 1 — Dimensions and mass

Size code	Recommended bundle diameter		Length of tie <i>A</i>	Thickness of strap <i>B</i>	Width of strap <i>E</i>		Head dimensions			Loop tensile strength N min.	Mass of 10 ties related to minimum length g max.
							Length <i>F</i>	Width <i>D</i>	Height <i>C</i>		
	mm min.	mm max.	mm min.	mm max.	mm min.	mm max.	mm max.	mm max.	mm max.		
P	1,6	20	92	1,1	2,3	2,5	4,3	5,0	4,0	80	3,0
R	1,6	50	190	1,3	3,3	3,8	6,3	6,6	5,0	120	9,5
S	1,6	80	280	1,3	3,3	3,8	6,3	6,6	5,0	120	17,0
T	1,6	80	280	1,3	4,4	4,8	6,7	8,6	6,0	220	21,0
V	1,6	110	360	1,3	4,4	4,8	6,7	8,5	6,0	220	24,5
X	5,0	130	456	1,9	7,4	7,8	9,4	13,5	8,3	530	86
W	5,0	230	700	1,9	7,6	8,9	9,4	13,5	8,3	400	94

4.2 Material

4.2.1 Temperature rating type

The ties shall be capable of use within the following temperature ranges:

- Code E – 55 °C to 105 °C Non UV resistant.
- Code F – 55 °C to 105 °C UV resistant.
- Code G – 55 °C to 150 °C Non UV resistant.

4.2.2 Flammability class

Available as Class 1 and Class 2.

See Table 4 for requirements.

4.2.3 Colour

The colour code shall be as specified in EN 4056-002.

4.2.4 Burning behaviour

Materials for cable tie shall satisfy the following requirements when tested to EN 2825 and EN 2826.

4.2.4.1 Smoke density

The maximum specific optical smoke density (as specified in the test method) shall not exceed:

- $D_m = 200$ (flaming mode),
- $D_m = 150$ (non flaming mode).

4.2.4.2 Toxicity

The average concentration in parts per million (ppm) of the following gas components shall not exceed the following limits after a test duration of 4 min.

EN 4056-004:2014 (E)

Gas Component		Limit of concentration ppm
Hydrogen Fluoride	HF	100
Hydrogen Chloride	HCl	150
Hydrogen Cyanide	HCN	150
Sulphur Dioxide	SO ₂	100
Hydrogen Sulphide	H ₂ S	100
Nitrous Gases	NO/NO ₂	100
Carbon Monoxide	CO	1000

4.3 U.V. resistance

U.V. resistant cable ties shall meet the requirements of EN 4057-307, given in Table 3.

4.4 Variant code**Table 2 — Variant code**

Code	Description
A	External Serrations
B	Internal Serrations

Straps with internal serrations shall have a continuous support along both edges of the strap that shall not be less than the height of the serrations.

[SIST EN 4056-004:2015](https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015)

4.5 Application tool

<https://standards.iteh.ai/catalog/standards/sist/ca013576-bd68-4f8c-b2d2-30b70f175292/sist-en-4056-004-2015>

Cable ties shall be applied using a tensioning tool as specified in MS 90387, verified in accordance with EN 4057-407 ensuring that the application force does not exceed the values shown in Table 3.

Table 3 — Maximum recommended application force

Size code	N
P	60
R	100
S	100
T	150
V	150
X	300
W	280

5 Tests and requirements

See Table 4 and EN 4056-001.

Table 4

EN 4057-	Designation of the test	Requirement
201	Visual examination	There shall be no sharp or abrasive edges.
202	Examination of mass and dimensions	The mass and dimensions shall be in accordance with Table 1 of this standard.
301	Salt mist test	Not applicable.
302	Flammability	After removal of the burner from the specimen, any flame shall extinguish within 5 s. If there are no flaming droplets (or particles) during the test, and the flame extinguishes within 5 s, the specimen will be classified as Class 1. If there are flaming droplets (or particles) but all the flames extinguish within 5 s, the specimen will be classified as Class 2.
303	Resistance to fluids	All the specimens shall meet the minimum loop tensile strength as stated in Table 1 of this standard.
304	Loop tensile strength at maximum working temperature	All specimens shall meet at least 60 % of the minimum loop tensile strength as stated in Table 1 of this standard.
305	Colour fastness (applicable only to coloured ties)	The colour fastness of the specimen shall not be less than wool standard number 6.
306	Heat ageing test	The tensile strength shall not be lower than that specified in the appropriate product standard. The elongation at break of the aged, flat samples shall be not less than 75 % of the elongation at break of the unaged flat samples as defined in the product standard.
307	Resistance to ultra violet radiation	All the specimens shall meet at least 95 % of requirement for Part EN 4057-401. The average elongation at break shall be not less than 60 % of that of the unexposed standard.
401	Loop tensile strength	All the specimens shall meet the minimum loop tensile strength as stated in Table 1 of this standard.
402	Life cycle	After the vibration test: Minimum Temperature see material code. There shall be no damage to the cable insulation when viewed with a 10 times magnification aid. The specimens shall be examined for cracks, breaking and/or release of the locking device during removal from the vibration test harness. All specimens shall meet the minimum loop tensile strength as stated in Table 1 of this standard.
404	Low temperature installation	All the specimens shall meet the minimum loop tensile strength as stated in Table 1 of this standard.
405	Compass safe distance	Not applicable.
406	Locking device retention (ties containing metal locking barbs only).	Not applicable.
407	Verification of application tool settings	Values as per Table 3.