

---

---

**Road vehicles — Vehicle dynamics test  
methods —**

**Part 1:  
General conditions for passenger cars**

*Véhicules routiers — Méthodes d'essai de la dynamique des  
véhicules —*  
*(Partie 1: Conditions générales pour voitures particulières)*

[ISO 15037-1:2006](https://standards.iso.org/standards/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006)

[https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-  
ca209efc71a7/iso-15037-1-2006](https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006)



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 15037-1:2006](https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006>

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword.....	iv
Introduction .....	v
1 Scope .....	1
2 Normative references .....	1
3 Variables .....	2
3.1 Reference system .....	2
3.2 Variables to be determined .....	2
4 Measuring equipment.....	2
4.1 Description .....	2
4.2 Transducer installations .....	3
4.3 Data processing .....	3
5 Test conditions .....	6
5.1 General.....	6
5.2 Test track.....	6
5.3 Wind velocity.....	6
5.4 Test vehicle .....	6
6 Test method.....	7
6.1 Warm-up .....	7
6.2 Initial driving condition .....	7
Annex A (normative) Test report — General data.....	10
Annex B (normative) Test report — Test conditions.....	13
Annex C (informative) Transducers and their installations .....	14
Annex D (informative) Analogue filtering: Butterworth filter .....	18

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 15037-1 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 9, *Vehicle dynamics and road-holding ability*.

This second edition cancels and replaces the first edition (ISO 15037-1:1998), which has been technically revised. It also incorporates the Technical Corrigendum ISO 15037-1:1998/Cor. 1:2001.

ISO 15037 consists of the following parts, under the general title *Road vehicles — Vehicle dynamics test methods*:

- *Part 1: General conditions for passenger cars*
- *Part 2: General conditions for heavy vehicles and buses*

<https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006>

## Introduction

The dynamic behaviour of a road vehicle is a most important part of active vehicle safety. Any given vehicle, together with its driver and the prevailing environment, constitutes a unique closed-loop system. The task of evaluating the dynamic behaviour of the vehicle is therefore very difficult since there is significant interaction between these driver-vehicle-environment elements, and each of these elements is individually complex in itself.

The test conditions exert large influence on the test results. Only test results obtained at identical test conditions are comparable.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 15037-1:2006](https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 15037-1:2006

<https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006>

# Road vehicles — Vehicle dynamics test methods —

## Part 1: General conditions for passenger cars

### 1 Scope

This part of ISO 15037 specifies the general conditions that apply when vehicle dynamics properties are determined according to ISO test methods.

In particular, it specifies general conditions for

- variables,
- measuring equipment and data processing,
- environment (test track and wind velocity),
- test vehicle preparation (tuning and loading),
- initial driving, and
- test reports (general data and test conditions).

These items are of general significance, independent of the specific vehicle dynamics test method. They apply when vehicle dynamics properties are determined, unless other conditions are required by the standard which is actually used for the test method.

This part of ISO 15037 is applicable to passenger cars as defined in ISO 3833 and light trucks.

NOTE The general conditions defined in existing vehicle dynamics standards are valid until a reference to this part of ISO 15037 is included.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1176, *Road vehicles — Masses — Vocabulary and codes*

ISO 2416, *Passenger cars — Mass distribution*

ISO 3833, *Road vehicles — Types — Terms and definitions*

ISO 8855, *Road vehicles — Vehicle dynamics and road-holding ability — Vocabulary*

### 3 Variables

#### 3.1 Reference system

The variables of motion used to describe vehicle behaviour in a test-specific driving situation relate to the intermediate axis system ( $X, Y, Z$ ) (see ISO 8855).

The location of the origin of the vehicle axis system ( $X_V, Y_V, Z_V$ ) is the reference point, and this position shall be reported (see Annex A).

NOTE Useful positions for the reference point include (1) the centre of gravity of the vehicle and (2) a fixed point of geometry such as the point in the longitudinal plane of symmetry at the height of the centre of gravity and at mid-wheelbase. Locating the reference point at the centre of gravity is very useful for analytical evaluation of the test results of individual vehicles, but may cause difficulty in comparing results for different vehicles. Locating the reference point at the geometrical position is more convenient for comparing results from different tests, but may complicate theoretical analysis.

#### 3.2 Variables to be determined

To describe the vehicle dynamics in terms of driver input and vehicle response, the principal relevant variables are the following:

- steering-wheel angle ( $\delta_H$ );
- steering-wheel torque ( $M_H$ );
- longitudinal velocity ( $v_X$ );
- sideslip angle ( $\beta$ ) or lateral velocity ( $v_Y$ );
- longitudinal acceleration ( $a_X$ );
- lateral acceleration ( $a_Y$ );
- yaw velocity ( $d\psi/dt$ );
- roll velocity ( $d\phi/dt$ );
- pitch velocity ( $d\theta/dt$ );
- roll angle ( $\phi$ ); and
- pitch angle ( $\theta$ ).

**ITeh STANDARD PREVIEW**  
**(standards.iteh.ai)**  
<https://standards.iteh.ai/catalog/standards/sist/031c5ced-5525-41b1-9c3b-ca209efc71a7/iso-15037-1-2006>  
ISO 15037-1:2006

These variables are defined in ISO 8855.

All standards that make reference to this part of ISO 15037 shall specify which variables apply. Depending on the specific standard, additional variables can be required or recommended.

NOTE These variables can be determined directly by measuring or by calculation from measured values.

### 4 Measuring equipment

#### 4.1 Description

Time histories of the measured variables shall be recorded by a time-based multi-channel recording system by means of appropriate transducers (see Annex C). Typical operating ranges and recommended maximum errors of the transducer and recording system are shown in Table 1. The specified accuracies shall be achieved whether the variables are measured or are calculated.



Table 1 — Variables, their typical operating ranges and recommended maximum errors

Variable	Typical operating range	Recommended maximum "overall" error
Steering-wheel angle	-360° to 360°	± 1° for $\delta_H < 50^\circ$ ± 2° for $\delta_H > 50^\circ$ and $< 180^\circ$ ± 4° for $\delta_H > 180^\circ$
Steering-wheel torque	-30 Nm to 30 Nm	± 0,1 Nm for $M_H < 10$ Nm ± 0,3 Nm for $M_H > 10$ Nm
Longitudinal velocity	0 km/h to 180 km/h	± 1 km/h for $v_X < 100$ km/h ± 2 km/h for $v_X > 100$ km/h
Lateral velocity	-10 m/s to 10 m/s	± 0,2 m/s
Sideslip angle	-20° to 20°	± 0,3°
Longitudinal acceleration	-15 m/s <sup>2</sup> to 15 m/s <sup>2</sup>	± 0,15 m/s <sup>2</sup>
Lateral acceleration	-15 m/s <sup>2</sup> to 15 m/s <sup>2</sup>	± 0,15 m/s <sup>2</sup>
Yaw velocity	-50 °/s to 50 °/s	± 0,3 °/s for $d\psi/dt < 20$ °/s ± 1 °/s for $d\psi/dt > 20$ °/s
Pitch velocity	-50 °/s to 50 °/s	± 0,3 °/s for $d\theta/dt < 20$ °/s ± 1 °/s for $d\theta/dt > 20$ °/s
Roll velocity	-50 °/s to 50 °/s	± 0,3 °/s for $d\phi/dt < 20$ °/s ± 1 °/s for $d\phi/dt > 20$ °/s
Roll angle	-15° to 15°	± 0,15°
Pitch angle	-15° to 15°	± 0,15°

Increased measurement accuracy may be desirable for computation of some of the characteristic values. If any system error exceeds the recommended maximum value, this and the actual maximum error shall be stated in the test report (see Annex A).

## 4.2 Transducer installations

The transducers shall be installed according to the manufacturer's instructions when such instructions exist, so that the variables corresponding to the terms and definitions of ISO 8855 can be determined.

If a transducer does not measure a variable in the defined position, appropriate transformation shall be carried out.

## 4.3 Data processing

### 4.3.1 General

The frequency range relevant for tests on horizontal dynamics of passenger cars is between 0 Hz and the maximum utilized frequency  $f_{\max} = 5$  Hz. Based on whether analogue or digital data processing methods are used, the requirements given in 4.3.2 or in 4.3.3 apply.

### 4.3.2 Analogue data processing

The bandwidth of the entire, combined transducer/recording system shall be no less than 8 Hz.

In order to execute the necessary filtering of signals, low-pass filters shall be employed. The width of the passband (from 0 Hz to frequency  $f_0$  at  $-3$  dB) shall not be less than 9 Hz. Amplitude errors shall be less than  $\pm 0,5$  % in the relevant frequency range of 0 Hz to 5 Hz. All analogue signals shall be processed with filters having sufficiently similar phase characteristics to ensure that time delay differences due to filtering lie within the required accuracy for time measurement.

NOTE During analogue filtering of signals with different frequency contents, phase shifts can occur. Therefore, a digital data processing method, as described in 4.3.3, is preferable.

### 4.3.3 Digital data processing

#### 4.3.3.1 General considerations

Preparation of analogue signals includes consideration of filter amplitude attenuation and sampling rate to avoid aliasing errors, and filter phase lags and time delays. Sampling and digitizing considerations include pre-sampling amplification of signals to minimize digitizing errors; number of bits per sample; number of samples per cycle; sample and hold amplifiers; and timewise spacing of samples. Considerations for additional phaseless digital filtering include selection of passbands and stopbands and the attenuation and allowable ripple in each; and correction of filter phase lags. Each of these factors shall be considered in order to achieve a relative overall data acquisition accuracy of  $\pm 0,5$  %.

Attenuation and phase shift information for a Butterworth filter is provided in Annex D.

#### 4.3.3.2 Aliasing errors and anti-aliasing filters

In order to avoid uncorrectable aliasing errors, the analogue signals shall be appropriately filtered before sampling and digitizing. The order of the filters used and their passband shall be chosen according to both the required flatness in the relevant frequency range and the sampling rate.

The minimum filter characteristics and sampling rate shall be such that:

- a) within the relevant frequency range of 0 Hz to  $f_{\max} = 5$  Hz, the maximum attenuation of the analogue signal is less than the resolution of the digitized signal; and
- b) at one-half the sampling rate (i.e. the Nyquist or "folding" frequency), the magnitudes of all frequency components of signal and noise are reduced to less than the digital resolution.

For 0,05 % resolution, the filter attenuation shall be less than 0,05 % to 5 Hz, and the attenuation shall be greater than 99,95 % at all frequencies greater than one-half the sampling frequency.

It is recommended that anti-aliasing filters be of order four or higher (see Annex D).

Although filtering for anti-aliasing is required, excessive analogue filtering shall be avoided. Moreover, all filters shall have sufficiently similar phase characteristics to ensure that differences in time delays between signals are compatible with the required accuracy for the time measurement.

NOTE Phase shifts are especially significant when measured variables are multiplied together to form new variables, because, while amplitudes multiply, phase shifts and associated time delays add. Phase shifts and time delays are reduced by increasing the filter cut-off frequency,  $f_0$ . Whenever equations describing the pre-sampling filters are known, it is practical to remove their phase shifts and time delays by simple algorithms performed in the frequency domain.

#### 4.3.3.3 Data sampling and digitizing


At 5 Hz, the signal amplitude changes by up to 3 % per millisecond. To limit dynamic errors caused by changing analogue inputs to 0,1 %, sampling or digitizing time shall be less than 32  $\mu$ s. Each pair or set of data samples to be compared shall be taken simultaneously or within a sufficiently short time period.

The digitizing system shall have a resolution of 12 bits ( $\pm 0,05$  %) or more and an accuracy of 2 LSB ( $\pm 0,1$  %). Amplification of the analogue signal before digitizing shall be such that, in the digitizing process, the combined error due to the finite resolution and inaccuracy of digitizing is less than 0,2 %.

#### 4.3.3.4 Digital filtering

For filtering of sampled data in data evaluation, phaseless (zero phase shift) digital filters shall be used incorporating the following characteristics (see Figure 1):

- passband shall range from 0 Hz to 5 Hz;
- stopband shall begin between 10 Hz and 15 Hz;
- the filter gain in the passband shall be  $1 \pm 0,005$  ( $100 \pm 0,5$  %);
- the filter gain in the stopband shall be  $\pm 0,01$  ( $\pm 1$  %).

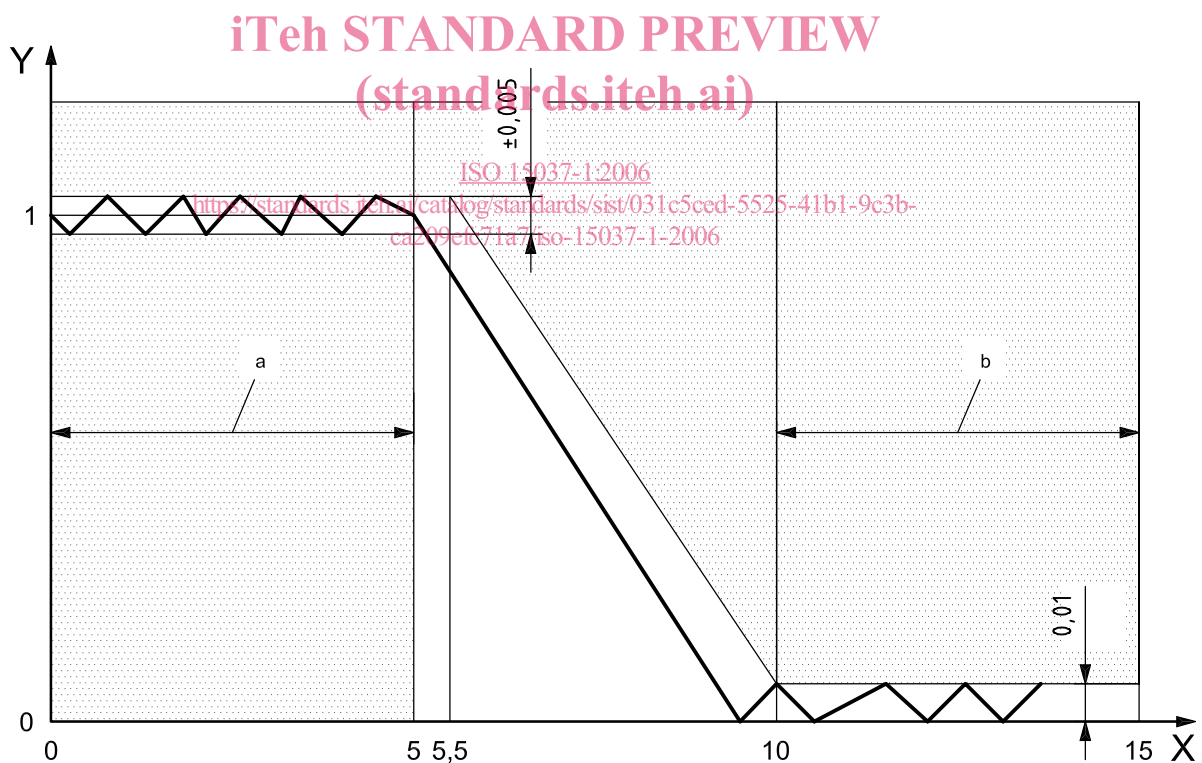

#### Key

X frequency,  $f$  (Hz)

Y filter gain

a Passband.

b Stopband.

Figure 1 — Required characteristics of phaseless digital filters