



SLOVENSKI STANDARD

SIST EN 4551:2015

01-januar-2015

Nadomešča:

SIST EN 4551:2004

Aeronavtika - Cevni priključek 37° iz toplotnoodpornega jekla - Stožerne matice - Colska izvedba

Aerospace series - Pipe coupling, 37°, in heat resisting steel - Swivel nuts - Inch series

Luft- und Raumfahrt - Rohrverschraubung 37°, aus hochwarmfestem Stahl - Überwurfmuttern - Inch-Reihe

(standards.iteh.ai)

Série aérospatiale - Système de raccordement 37°, en acier résistant à chaud - Érous prisonniers - Série inch

[SIST EN 4551:2015](https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015)

<https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015>

Ta slovenski standard je istoveten z: EN 4551:2014

ICS:

49.025.10	Jekla	Steels
49.080	Letalski in vesoljski hidravlični sistemi in deli	Aerospace fluid systems and components

SIST EN 4551:2015

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4551:2015](#)

<https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015>

EUROPEAN STANDARD

EN 4551

NORME EUROPÉENNE

EUROPÄISCHE NORM

October 2014

ICS 49.080

Supersedes EN 4551:2003

English Version

Aerospace series - Pipe coupling, 37°, in heat resisting steel - Swivel nuts - Inch series

Série aérospatiale - Système de raccordement 37°, en acier
résistant à chaud - Écrous prisonniers - Série inch

Luft- und Raumfahrt - Rohrverschraubung 37°, aus
hochwarmfestem Stahl - Überwurfmuttern - Inch-Reihe

This European Standard was approved by CEN on 4 January 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

[SIST EN 4551:2015](https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015)

<https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Required characteristics	4
3.1 Configuration – Dimensions – Tolerances – Masses.....	4
3.2 Materials	5
3.3 Surface treatments	5
4 Designation	7
5 Marking	7
6 Technical specification	7
Annex A (informative) Standard evolution form.....	8

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 4551:2015](https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015)

<https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015>

Foreword

This document (EN 4551:2014) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This document supersedes EN 4551:2003.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2015, and conflicting national standards shall be withdrawn at the latest by April 2015.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

(standards.iteh.ai)

SIST EN 4551:2015

<https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015>

EN 4551:2014 (E)**1 Scope**

This European Standard specifies the characteristics of swivel nuts for inch series pipe couplings, 37°, in heat resisting steel, for aerospace applications.

Nominal pressure: Class D in accordance with ISO 6771.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*

EN 2491, *Aerospace series — Molybdenum disulphide dry lubricants — Coating methods*

EN 2786, *Aerospace series — Electrolytic silver plating of fasteners*

EN 3468, *Aerospace series — Steel FE-PA13 — Softened — $500 \leq R_m \leq 700$ MPa — Forgings — $D_e \leq 100$ mm¹⁾*

EN 3487, *Aerospace series — Steel FE-PA3601 (X6CrNiTi18-10) — Air melted — Softened — Bar for machining — a or $D \leq 250$ mm — 500 MPa $\leq R_m \leq 700$ MPa*

EN 4560, *Aerospace series — Pipe coupling, 37°, spherical, up to 21 000 kPa — Inch series — Technical specification*

ISO 3161, *Aerospace — UNJ threads — General requirements and limit dimensions*

ISO 6771, *Aerospace — Fluid systems and components — Pressure and temperature classifications*

3 Required characteristics**3.1 Configuration – Dimensions – Tolerances – Masses**

See Figure 1 and Table 1 to Table 4. Dimensions and tolerances are in millimetres. They apply before lubrication except for silver plating parts.

Table 1

Code	Locking wire hole option
N	without locking wire hole
Y	with 2 locking wire holes

¹⁾ Published as ASD-STAN Prestandard at the date of publication of this standard (www.asd-stan.org).

3.2 Materials


EN 3468 with minimum hardness HB > 140 or EN 3487 with minimum hardness HB > 140.

3.3 Surface treatments

Table 2

Code	Surface treatment	Standard
A	None	—
B	Molybdenum disulphide coating	EN 2491
C	Silver plating	EN 2786

$R_a 3,2$ / $\left(R_a 1,6 \right)$ $\begin{matrix} -0,3 \\ -0,1 \end{matrix}$ $\left(\begin{matrix} L \\ \end{matrix} \right)$ Thread's surface will be achieved by normal methods of manufacture.

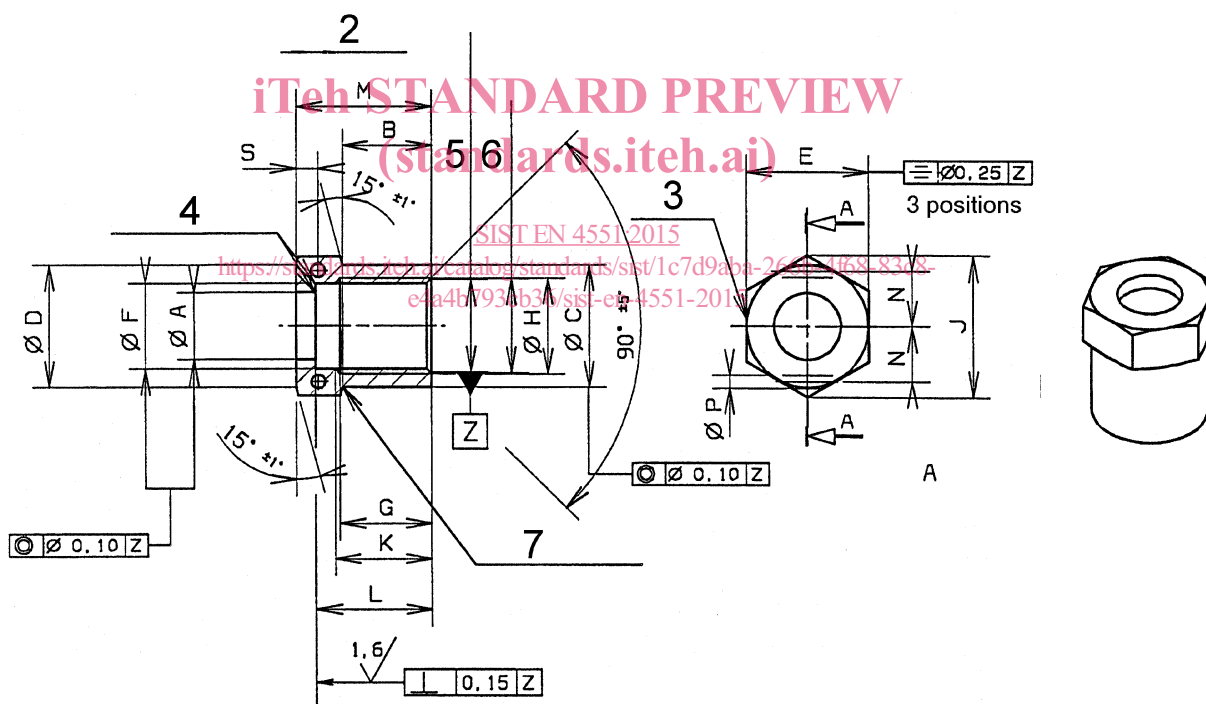

Key

- 1 $R 0,13$ to $R 0,25$
- 2 Pitch diameter
- 3 Thread
- 4 $R 0,13$ to $R 1,80$
- 5 Three positions
- 6 Marking

Figure 1

Table 3

Dimensional code ^a	Nominal diameter	Thread ^b	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>	<i>F</i>	<i>G</i>	<i>H</i>	<i>J</i>	<i>K</i>	<i>L</i>	<i>M</i>	Mass quoted in kg/1 000 parts ≈
			+ 0,1 0		+ 0,25 0	+ 0,5 0	+ 0,05 - 0,25		min.	± 0,4	min.	max.	+ 0,25 0		
03	4,763	375 0-24UNJF-3B	6,15	10,10 10,85	12,30	12,45	12,70	8,55 8,75	7,00	9,90	14,25	10,20	13,90	15,65 16,20	9,95
04	6,350	437 5-20UNJF-3B	7,75	10,45 11,25	13,85	14,00	14,30	9,95 10,15	7,45	11,50	16,00	11,20	14,25	16,05 16,55	11,00
05	7,924	500 0-20UNJF-3B	9,50	10,80 11,55	15,50	15,60	15,90	11,55 11,75	8,45	13,10	17,90	12,20	15,35	17,30 17,80	12,50
06	9,525	562 5-18UNJF-3B	11,15	11,50 12,25	17,10	17,20	17,50	13,00 13,20	9,30	14,70	19,70	12,70	16,05	18,75 19,00	16,30
08	12,700	750 0-16UNJF-3B	14,45	12,15 12,90	21,85	22,00	22,25	17,60 17,80	9,75	19,45	25,10	14,45	18,25	20,80 21,30	26,50
10	15,875	875 0-14UNJF-3B	17,70	15,30 16,05	25,00	25,15	25,40	20,55 20,80	11,50	22,60	28,70	16,94	20,60	23,30 23,80	33,50
12	19,050	1.062 5-12UNJ-3B	21,20	14,55 15,30	29,85	31,50	31,80	25,00 25,25	12,40	27,40	35,90	18,75	21,90	24,35 24,85	56,70
16	25,400	1.312 5-12UNJ-3B	27,65	16,20 16,95	36,30	37,85	38,20	31,35 31,60	13,60	33,70	43,20	19,95	24,30	26,70 27,25	75,40

^a This code corresponds to the nominal diameter given in 16th of inches within two digits.

^b Quoted in inches in accordance with ISO 3161.

(standards.iteh.ai)

Table 4


(When locking wire hole option code is "Y")

Dimensional code ^a	Nominal diameter	<i>N</i>	<i>P</i>	<i>S</i>
				± 0,25
03	4,763	5,3	1,45	2,55
		5,6	1,55	
04	6,350	6,2	1,45	2,55
		6,5	1,55	
05	7,924	7,1	1,65	2,55
		7,4	1,90	
06	9,525	7,9	1,65	2,55
		8,1	1,90	
08	12,700	10,2	1,65	3,55
		10,6	1,90	
10	15,875	11,8	1,65	3,55
		12,3	1,90	
12	19,050	14,7	1,65	3,55
		15,2	1,90	
16	25,400	18,2	1,65	3,55
		18,6	1,90	

^a This code corresponds to the nominal diameter given in 16th of inches within two digits.

4 Designation

EXAMPLE

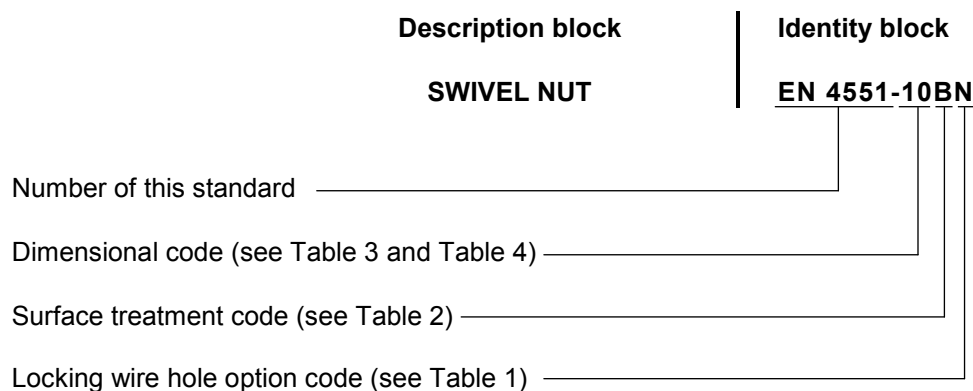

NOTE If necessary, the code I9005 shall be placed between the description block and the identity block.

5 Marking

According to EN 2424, style A and Figure 1.

6 Technical specification

According to EN 4560.

iTech STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/1c7d9aba-266b-4f68-83c8-e4a4b793cb36/sist-en-4551-2015>