



IEC 60086-3

Edition 3.0 2011-01

INTERNATIONAL STANDARD

Primary batteries **ITeh** STANDARD PREVIEW
Part 3: Watch batteries
(standards.iteh.ai)

IEC 60086-3:2011

<https://standards.iteh.ai/catalog/standards/sist/183a09f6-7967-4447-839e-8e924822e5c3/iec-60086-3-2011>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2011 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00



IEC 60086-3

Edition 3.0 2011-01

INTERNATIONAL STANDARD

Primary batteries **ITeh** STANDARD PREVIEW
Part 3: Watch batteries (standards.iteh.ai)

IEC 60086-3:2011

<https://standards.iteh.ai/catalog/standards/sist/183a09f6-7967-4447-839e-8e924822e5c3/iec-60086-3-2011>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

U

ICS 29.220.10; 39.040.10

ISBN 978-2-88912-330-8

CONTENTS

FOREWORD.....	4
INTRODUCTION.....	6
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	7
4 Physical requirements	8
4.1 Battery dimensions, symbols and size codes	8
4.2 Terminals	10
4.3 Projection of the negative terminal (h_5).....	10
4.4 Shape of negative terminal	10
4.5 Mechanical resistance to pressure	11
4.6 Deformation	11
4.7 Leakage	12
4.8 Marking	12
4.8.1 General	12
4.8.2 Disposal	12
5 Electrical requirements.....	12
5.1 Electrochemical system, nominal voltage, end-point voltage and open-circuit voltage	12
5.2 Closed circuit voltage (U_{cc} (CCV)), internal resistance and impedance	13
5.3 Capacity	13
5.4 Capacity retention	13
6 Sampling and quality assurance	13
6.1 Sampling	13
6.1.1 Testing by attributes	13
6.1.2 Testing by variables	14
6.2 Product quality indices	14
7 Test methods	14
7.1 Shape and dimensions	14
7.1.1 Shape requirement	14
7.2 Electrical characteristics.....	14
7.2.1 Environmental conditions.....	14
7.2.2 Equivalent circuit – effective internal resistance – DC method	14
7.2.3 Equipment	15
7.2.4 Measurement of open-circuit voltage U_{oc} (OCV) and closed circuit voltage U_{cc} (CCV)	16
7.2.5 Calculation of the internal resistance R_i	17
7.2.6 Measurement of the capacity	17
7.2.7 Calculation of the internal resistance R_i during discharge in case of method A (optional)	19
7.3 Test methods for determining the resistance to leakage	20
7.3.1 Preconditioning and previous examination	20
7.3.2 High temperature and humidity test	21
7.3.3 Test by temperature cycles.....	21
8 Visual examination and acceptance conditions	22
8.1 Preconditioning	22

8.2	Magnification	22
8.3	Lighting	22
8.4	Leakage levels and classification	22
8.5	Acceptance conditions	24
Annex A (normative)	Designation	25
Bibliography	26
Figure 1	– Dimensional drawing	8
Figure 2	– Shape of negative terminal	11
Figure 3	– Shape requirement	14
Figure 4	– Schematic voltage transient	15
Figure 5	– Curve: $U = f(t)$	16
Figure 6	– Circuitry principle	16
Figure 7	– Circuitry principle for method A	18
Figure 8	– Circuitry principle for method B	19
Figure 9	– Test by temperature cycles	21
Table 1	– Dimensions and size codes	9
Table 2	– Dimensions and size codes	10
Table 3	– Minimum values of I_1	11
Table 4	– Applied force F by battery dimensions	11
Table 5	– Standardised electrochemical systems	13
Table 6	– Test method for U_{cc} (CCV) measurement	17
Table 7	– Test method A for U_{cc} (CCV) measurement	18
Table 8	– Discharge resistance (values)	20
Table 9	– Storage conditions for the recommended test	21
Table 10	– Storage conditions for optional test	21
Table 11	– Leakage levels and classification	23

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PRIMARY BATTERIES –**Part 3: Watch batteries****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60086-3 has been prepared by IEC technical committee 35: Primary cells and batteries, and ISO technical committee 114: Horology.

This third edition cancels and replaces the second edition (2004) and constitutes a technical revision.

The major technical changes with respect to the previous edition are the drawings, a review of the table of electrochemical systems and a harmonization of the marking clause with the other standards of the IEC 60086 series. Moreover, the table of the leakage levels was extended by adding drawings with better visualization.

This publication is published as a double logo standard.

The text of this standard is based on the following documents:

FDIS	Report on voting
35/1286/FDIS	35/1289/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table. In ISO, the standard has been approved by 8 P members out of 8 having cast a vote.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60086 series, under the general title: *Primary batteries*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
IEC 60086-3:2011
<https://standards.iteh.ai/catalog/standards/sist/183a09f6-7967-4447-839e-8e924822e5c3/iec-60086-3-2011>

INTRODUCTION

The technical content of this part of IEC 60086 provides specific requirements and information for primary watch batteries. This part was prepared through joint work between IEC TC 35 and ISO TC 114 to benefit primary battery users, watch designers and battery manufacturers by ensuring the best compatibility between batteries and watches.

This part will remain under continual scrutiny to ensure that the publication is kept up to date with the advances in both battery and watch technologies.

NOTE Safety information can be found in IEC 60086-4 and IEC 60086-5.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

IEC 60086-3:2011

<https://standards.iteh.ai/catalog/standards/sist/183a09f6-7967-4447-839e-8e924822e5c3/iec-60086-3-2011>

PRIMARY BATTERIES –

Part 3: Watch batteries

1 Scope

This part of IEC 60086 specifies dimensions, designation, methods of tests and requirements for primary batteries for watches. In several cases, a menu of test methods is given. When presenting battery electrical characteristics and/or performance data, the manufacturer specifies which test method was used.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60086-1:-¹, *Primary batteries – Part 1: General*

IEC 60086-2:-², *Primary batteries – Part 2: Physical and electrical specifications*

IEC 60086-4:2007, *Primary batteries – Part 4: Safety of lithium batteries*

IEC 60086-5:-³, *Primary batteries – Part 5: Safety of batteries with aqueous electrolyte*

IEC 60410, *Sampling plans and procedures for inspection by attributes*

ISO 2859 (all parts), *Sampling procedures for inspection by attributes*

ISO 3951(all parts as applicable), *Sampling procedures for inspection by variables*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60086-1 as well as the following terms and definitions apply.

3.1

capacitive reactance

part of the internal resistance, that leads to a voltage drop during the first seconds under load

3.2

capacity

electric charge (quantity of electricity) which a cell or battery can deliver under specified discharge conditions

NOTE The SI unit for electric charge is the coulomb (1 C = 1 As) but, in practice, capacity is usually expressed in ampere hours (Ah).

¹ To be published in 2011.

² To be published in 2011.

³ To be published in 2011.

3.3

fresh battery

undischarged battery 60 days maximum after date of manufacture

3.4

ohmic drop

part of the internal resistance that leads to a voltage drop immediately after switching the load on


4 Physical requirements

4.1 Battery dimensions, symbols and size codes

Dimensions and tolerances of batteries for watches shall be in accordance with Figure 1, Table 1 and Table 2. The dimensions of the batteries shall be tested in accordance with 7.1.

The symbols used to denote the various dimensions in Figure 1 are in accordance with IEC 60086-2, Clause 4.

Dimensions in millimetres

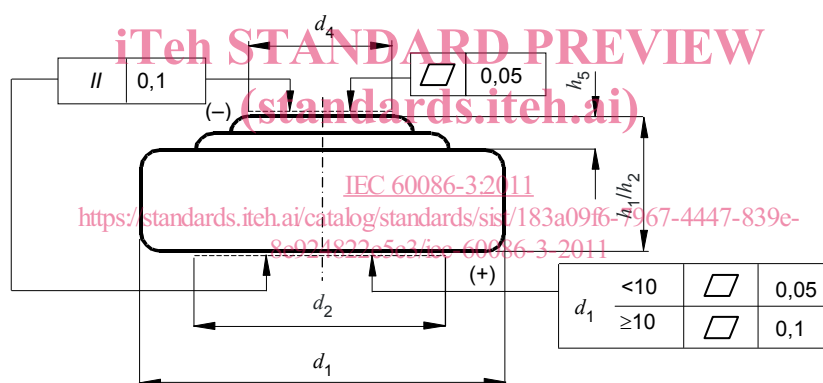

IEC 155/11

Key

- h_1 maximum overall height of the battery
- h_2 minimum distance between the flats of the positive and negative contacts
- h_5 minimum projection of the flat negative contact
- d_1 maximum and minimum diameter of the battery
- d_2 minimum diameter of the flat positive contact
- d_4 minimum diameter of the flat negative contact

NOTE This numbering follows the harmonization in the IEC 60086 series.

Figure 1 – Dimensional drawing

Table 2 – Dimensions and size codes*Dimensions in millimetres*

Diameter			d_4	Height h_1/h_2					
Code ^a	d_1	Tolerance		Code ^a					
				12	16	20	25	30	32
				Tolerances					
				$\begin{smallmatrix} 0 \\ -0,20^b \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0,20^b \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0,25^b \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0,30^b \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0,30^b \end{smallmatrix}$	$\begin{smallmatrix} 0 \\ -0,30^b \end{smallmatrix}$
16	16	$\begin{smallmatrix} 0 \\ -0,25 \end{smallmatrix}$	5,00	1,20	1,60	2,00	2,50		3,20
20	20	$\begin{smallmatrix} 0 \\ -0,25 \end{smallmatrix}$	8,00	1,20	1,60	2,00	2,50		3,20
23	23	$\begin{smallmatrix} 0 \\ -0,30 \end{smallmatrix}$	8,00	1,20	1,60	2,00	2,50		
24	24,5	$\begin{smallmatrix} 0 \\ -0,30 \end{smallmatrix}$	8,00	1,20	1,60			3,00	
NOTE Open boxes in the above matrix are not necessarily available for standardisation due to the concept of overlapping tolerances.									
^a See Annex A.									
^b To be reduced in the future.									

iTech STANDARD PREVIEW
(standards.itech.ai)

4.2 Terminals

Negative contact (–): the negative contact (dimension d_4) shall be in accordance with Tables 1 and 2. This is not applied to those batteries with a two-step negative contact.

Positive contact (+): the cylindrical surface is connected to the positive terminal. Positive contact should be made to the side of the battery but may be made to the base.

4.3 Projection of the negative terminal (h_5)

The dimension h_5 shall be as follows:

$$h_5 \geq 0,02 \text{ for } h_1/h_2 \leq 1,65$$

$$h_5 \geq 0,06 \text{ for } 1,65 < h_1/h_2 < 2,5$$

$$h_5 \geq 0,08 \text{ for } h_1/h_2 \geq 2,5$$

NOTE The negative contact should be the highest point of the battery.

4.4 Shape of negative terminal

The space requirements shall be contained within an angle of 45° (see Figure 2).

The minimum values of l_1 , for different heights of h_1/h_2 , are given in Table 3.