



SLOVENSKI STANDARD
oSIST prEN 15152:2018
01-februar-2018

Železniške naprave - Vetrobranska stekla za vlake

Railway applications - Windscreens for trains

Bahnanwendungen - Frontscheiben für Schienenfahrzeuge

Applications ferroviaires - Vitres frontales pour trains

Ta slovenski standard je istoveten z: prEN 15152

ICS:

45.060.10 Vlečna vozila [SIST EN 15152:2019](https://standards.iteh.ai/SIST/EN/15152/2019) Tractive stock [f5-99c0a2abd45c/sist-en-15152-2019](https://standards.iteh.ai/SIST/EN/15152/2019)

oSIST prEN 15152:2018

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 15152

November 2017

ICS 45.060.10

Will supersede EN 15152:2007

English Version

Railway applications - Windscreens for trains

Applications ferroviaires - Vitres frontales pour trains

Bahnanwendungen - Frontscheiben für
Schienenfahrzeuge

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 256.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.

[SIST EN 15152:2019](https://standards.iteh.ai/SIST/EN/15152/2019)

<https://standards.iteh.ai/catalog/standards/sist/64de7036-cc4d-4da6-99f5-99c0a2abd45c/sist-en-15152-2019>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

Page

European foreword.....	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	7
4 Functional requirements.....	9
4.1 General.....	9
4.1.1 Windscreen classification	9
4.1.2 Driver's windscreens	11
4.1.3 Passenger windscreens and vehicle end windows	11
4.2 Optical areas	12
4.3 Windscreen test requirements	13
4.3.1 Type tests	13
4.3.2 Routine tests	14
4.4 Marking.....	14
4.5 Service requirements	14
4.6 Storage and handling of finished windscreens.....	15
5 Visual and optical requirements	15
5.1 Appearance defects	15
5.1.1 General.....	15
5.1.2 Visual inspection procedure for appearance defects.....	16
5.1.3 Definition and classification of defects	17
5.1.4 Defect acceptance criteria.....	20
5.2 Optical characteristics.....	20
5.2.1 Secondary image separation.....	20
5.2.2 Optical distortion	21
5.2.3 Haze.....	22
5.2.4 Light transmittance	22
5.2.5 Chromaticity	24
6 Mechanical characteristics	27
6.1 Impact resistance.....	27
6.1.1 Impact test requirements.....	27
6.1.2 Spalling assessment	29
6.1.3 Impact test projectile velocity	29
6.1.4 Impact test procedure	30
6.1.5 Impact test acceptance criteria.....	31
6.2 Residual visibility.....	32
6.2.1 Test samples	32
6.2.2 Test method	32
6.2.3 Acceptance criteria.....	32
6.3 Resistance against abrasion.....	32
6.4 Resistance to repeated impact from small particles (gravelling)	33
6.4.1 General.....	33
6.4.2 Test samples	33
6.4.3 Test method	33
6.5 Bullet resistance.....	33

7	Performance in service.....	34
7.1	Heating system	34
7.1.1	General	34
7.1.2	Heating uniformity.....	35
7.1.3	Coating based heating systems.....	35
7.1.4	Wire based heating systems	35
7.1.5	Resistance measurement.....	35
7.1.6	Flash test.....	35
7.2	Resistance against ageing.....	36
7.2.1	General	36
7.2.2	Accelerated weathering test.....	36
7.2.3	Thermal cycling.....	37
7.2.4	Humidity test.....	38
7.2.5	Windscreen heating test	38
Annex A (informative)	Determination of windscreen angles.....	39
A.1	Determination of windscreen plan view angle.....	39
A.2	Determination of the rake angle	42
Annex B (normative)	Transmittance calculation for inclined windscreen	43
Annex C (normative)	Windscreen test sample mounting	46
Annex D (normative)	Impact test projectile	48
Annex E (normative)	Gravelling test projectile	50
Annex F (informative)	Test sample	51
F.1	Test sample properties.....	51
F.2	Test sample for optical tests.....	51
F.3	Test sample for mechanical tests.....	51
F.4	Test sample for ageing tests	51
Annex G (normative)	Summary of testing requirements.....	52
Annex H (informative)	Alternative method for testing resistance to Ultra Violet radiation	53
H.1	General	53
H.2	Test method.....	53
H.3	Interpretation of results	53
Annex ZA (informative)	Relationship between this European Standard and the Essential Requirements of EU Directive 2008/57/CE aimed to be covered.....	54
Bibliography	55

European foreword

This document (prEN 15152:2017) has been prepared by Technical Committee CEN/TC 256 "Railway applications", the secretariat of which is held by DIN.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 15152:2007.

In comparison with the previous edition, the following technical modifications have been made:

Subclause/paragraph/table/figure	Change
Whole document and scope	Introduction of urban rail requirements, requirements for high speed trains and for certain types of OTMs
2 Normative references	The normative references have been updated
3 Terms and definitions	Creation of new definitions for different types of windscreen and glazing (e.g lateral windscreens, passenger windscreens, etc)
3 Terms and definitions	New definitions for hotspots, heavy rail and light rail
4.1.1 Windscreen classifications	New sub clause for the classification of windscreens into different types: driver's windscreens, lateral windscreen, passenger windscreen
4.2 Optical areas	New definitions of different optical areas based on the types of windscreens
4.3 Windscreen test requirements	All the test requirements as well as test prescriptions have been moved to the corresponding sub clauses
4.4 Marking	Former sub clause 4.3.3 has been moved and modified
4.5 Service requirements	New sub clause for in service requirements for windscreens
4.6 Storage and handling	New sub clause for storage and handling requirements for windscreens
5 Visual and optical requirements	New clause created for visual and optical requirements in order to separate them from functional requirements
5.1.2 Visual inspection procedure for appearance defects	New sub clause with precise instructions for the inspection of windscreens
5.1.3 Definition and classification of defects	New criteria for defining defects and their tolerances
5.1.4 Defect acceptance criteria	The notion of negligible, minor and major defects has been replaced by the number of acceptable defects on a given surface of the windscreen
5.2 Optical characteristics	New sub clause assembling all the optical requirements as well as the related measurement methods. Different requirements for urban rail have been introduced
6 Mechanical characteristics	New clause assembling all the mechanical requirements

	for windscreens. The clause has been editorially rearranged with regards to the previous version
6.1.1 Impact test requirements	Separate new requirements for the testing of high speed trains. Temperature ranges for the test have been introduced. The notion of testing at different angles (e.g 90° or at installation angle) has been introduced
6.1.4 Impact test procedure	The test procedure is now described in detail. Notably The notion of testing at different angles (e.g 90° or at installation angle) has been introduced
6.2 Residual visibility	New requirement and associated test
6.4 Resistance to repeated impact from small particles (gravelling)	Editorial rearrangement of the sub clause and introduction of more precise test methods
6.5 Bullet resistance	New requirement and associated test
7 Performance in service	New clause assembling several requirements for heating systems, for the resistance against ageing, the accelerated wreathing test, thermal cycling, etc. All the sub clauses have been editorially reworked and more precise test methods have been introduced
Annex A – Determination of windscreen angles	New annex introduced to help the user determine the type of the windscreen (e.g driver's windscreen, lateral windscreen, etc)
Annex B – Transmittance calculation for inclined windscreens	New annex explaining the calculation method for light transmittance of windscreens at installation angle
Annex C – Windscreen test sample mounting	New annex giving precise instructions for the installation of test samples. The set up applies to impact and gravelling tests
Annex D – Impact test projectile	New, more precise criteria for the impact test projectile, based on actual examples
Annex E – Gravelling test projectile	New annex for the precise description of the gravelling test projectile
Annex F – Test sample	New annex with precise requirements for test samples used in different tests throughout the document
Annex G – Summary of testing requirements	Editorial rearrangement of the annex in order to take into account all the changes made to the document
Annex ZA – Relationship between this European Standard and the Essential Requirements of EU Directive 2008/57/CE aimed to be covered	New annex ZA

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive 2008/57/CE.

For relationship with EU Directive 2008/57/CE, see informative Annex ZA, which is an integral part of this document.

1 Scope

This European Standard specifies the functional requirements for rail vehicle windscreens, including type testing, routine testing and inspection methods.

For on-track machines (OTMs) when in transport mode (self-propelled or hauled) the requirements of this standard are applicable. OTMs in working configuration are outside the scope of this standard.

Determination of the size, shape, orientation and position of windscreens is outside the scope of this document. These data form part of the windscreen technical specification.

This document applies to windscreens made of laminated glass, which is the most commonly used material but also to other materials, subject to the performance requirements being satisfied.

This document does not specify requirements for the interfaces between the windscreen and the vehicle. Accordingly this document does not address issues relating to: structural integrity and crashworthiness.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 755-2:2016, *Aluminium and aluminium alloys - Extruded rod/bar, tube and profiles - Part 2: Mechanical properties*

EN 1063:1999, *Glass in building. Security glazing. Testing and classification of resistance against bullet attack*

EN 2155-9, *Aerospace series - Test method for transparent materials for aircraft glazing - Part 9: Determination of haze*

EN 45545-2, *Railway applications - Fire protection on railway vehicles - Part 2: Requirements for fire behaviour of materials and components*

EN 50155, *Railway applications - Electronic equipment used on rolling stock*

EN ISO 4892-3, *Plastics - Methods of exposure to laboratory light sources - Part 3: Fluorescent UV lamps (ISO 4892-3)*

EN ISO 11664-1 (CIE S 014-1), *Colorimetry - Part 1: CIE standard colorimetric observers*

EN ISO 11664-2 (CIE, S 014-2), *Colorimetry - Part 2: CIE standard illuminants*

EN ISO 11664-3 (CIE, S 014-3), *Colorimetry - Part 3: CIE tristimulus values*

ISO 48, *Rubber, vulcanized or thermoplastic - Determination of hardness (hardness between 10 IRHD and 100 IRHD)*

ISO 3537, *Road vehicles - Safety glazing materials - Mechanical tests*

ISO 3538:1997, *Road vehicles - Safety glazing materials - Test methods for optical properties*

ISO 6362-2:2014, *Wrought aluminium and aluminium alloys - Extruded rods/bars, tubes and profiles - Part 2: Mechanical properties*

CIE 15:2004, *Colorimetry, 3rd Edition*¹⁾

CIE 38:1977, *Radiometric and photometric characteristics of materials and their measurement*¹⁾

CIE S 004, *Colours of Light Signals*¹⁾

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

Note 1 to entry: Figure 1 shows examples of the different types of windscreen, bodyside windows and external glazing.

3.1

glazing

glass or equivalent transparent material

3.2

windscreen

glazing in front of a driver or passengers through which the track ahead may be observed

3.2.1

driver's windscreen

windscreen used by a driver in service to observe the track and signals

3.2.2

side windscreen


additional glazing positioned at the side of a windscreen that is predominately positioned transversely to the running direction

3.2.3

passenger windscreen

windscreen primarily for passenger use in the leading ends of rail vehicles

1) Can be obtained from: International Commission of Illumination, CIE Central Bureau, Kegelgasse 27, A-1030 Wien.

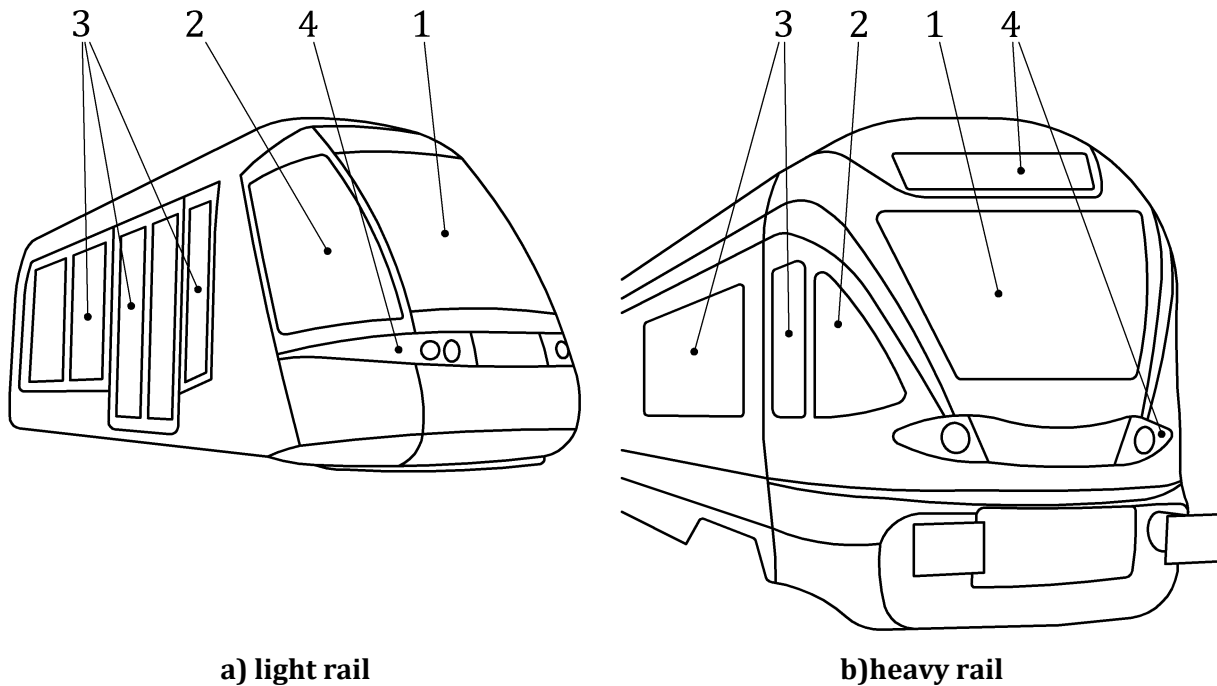**Key**

- 1 driver's windscreen (3.2.1)
- 2 side windscreen (3.2.2)
- 3 bodyside window
- 4 external glazing (for example covers for lights, information displays)

Figure 1 — Windscreen, window and glazing definitions**3.3****primary vision area**

area of the windscreen through which track and signals are visible from the driving position

Note 1 to entry: Defined as "vision area A" by EN 16186-1.

3.4**secondary vision area**

area of the windscreen outside the primary vision area, through which the driver may also look from the driving position

Note 1 to entry: Defined as "vision area B" by EN 16186-1.

3.5**peripheral area**

area of the windscreen outside the secondary vision area

Note 1 to entry: The peripheral area includes any screen-printed areas.

3.6**secondary image separation**

angular separation between the primary and the brightest secondary images (due to internal reflection) of a distant light source or object when viewed through glazing

3.7**ultra-violet radiation**

UV

electromagnetic radiation of a wavelength shorter than that of visible light

Note 1 to entry: For the purposes of this document, wavelength is between 200 nm and 380 nm.

3.8**spall**

small glass particles which detach from the face of a window pane when it is subjected to impact on the opposite side

Note 1 to entry: Spalling in this document describes the detachment of spall from the inside face of a windscreen or window, when the outer face is subjected to impact.

3.9**hot-spot**

highly localised area where the temperature deviates significantly from the area surrounding it

3.10**heavy rail**

general purpose rail transport system for passengers and freight, for local, regional, long distance or international traffic, accessible to all types of rail vehicle

Note 1 to entry: Does not include light rail systems

3.11**light rail**

urban and/or suburban rail transport system including metros, typically only for passengers

Note 1 to entry: Light rail vehicles are generally structural categories P-III, P-IV or P-V (in accordance with EN 12663-1) and crashworthiness categories C-II or C-IV (in accordance with EN 15227).

Note 2 to entry: Light rail systems typically have their own right of way or share it with road traffic and usually do not exchange vehicles with long-distance passenger or freight traffic.

3.12**technical specification**


document, describing specific parameters and/or product requirements as an addition to the requirements of this standard.

3.13**inspector**

person with evidence of training, professional knowledge, skill and experience to enable them to perform the inspection required

4 Functional requirements**4.1 General****4.1.1 Windscreen classification**

Windscreens are positioned to allow observation of the track and signals ahead of a vehicle. Additional side windscreens or windows may be provided to the side of the windscreen or windscreens (see Figure 2).

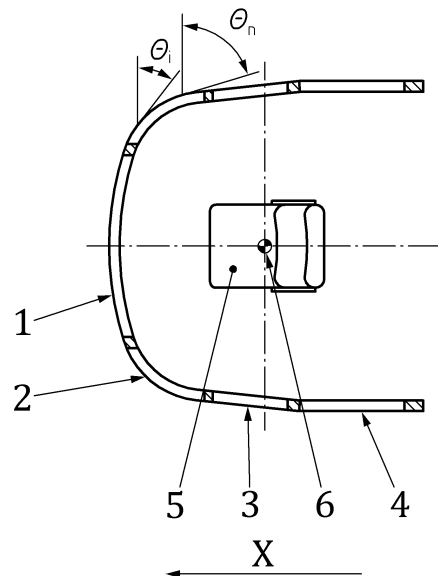**Key**

- 1 windscreen
- 2 side windscreen
- 3 bodyside window (forward of seat reference point, classified as side windscreen, see 4.1.2)
- 4 bodyside window
- 5 driver's seat (or passenger seats, for example in automatic vehicles)
- 6 seat reference point (SRP)
- θ_i, θ_n plan view angles
- X direction of travel

Figure 2 — Windscreens and side windscreens

The classification of rail vehicle glazing (windscreens, side windscreens or bodyside windows) affects the characteristics required and primarily depends on the orientation relative to the track. For the determination of a windscreen's orientation, only the parts of the glazing which if removed would create a structural aperture and expose the occupants of a vehicle to the outside shall be considered. Glazing that covers lights, information displays or extends over the structure for aesthetic purposes is therefore excluded.

For windscreens that can be considered to be forward facing and:

- which are not required or intended for direct observation of the track and signals, the maximum and minimum plan view angles, θ (See Figure 2), shall be determined according to Annex A.
- For driver's windscreens, the plan view angle, θ may be assumed to be $= 0^\circ$.

Where the projected forward facing area determined according to Annex A is less than or equal to 0,065 m², the window shall be considered to be a bodyside window and therefore outside the scope of this document.

The maximum and minimum rake angles Φ shall be determined according to Annex A.

The maximum and minimum installation angles Ψ shall be determined from the maximum and minimum plan view angles θ and the maximum and minimum rake angles Φ using the relation $\cos(\Psi) = \cos(\theta) \cdot \cos(\Phi)$.

The maximum and minimum windscreen plan view angles, rake angles and installation angles shall form part of the specification for manufacture and testing.

Where samples are used to determine optical properties, the maximum installation angle shall be used (see for example 5.2).


Where samples are used to determine mechanical properties such as impact resistance, the minimum installation angle shall be used (see for example 6.1).

4.1.2 Driver's windscreens

All windows in driver's cabs that are fully or partially in front of the driver's seat reference point (SRP), measured in the longitudinal direction shall be considered as windscreens or side windscreens (see Figure 2).

Where two, or more, windscreens are fitted and only one of which is required to be a driver's windscreen, the requirements for driver's windscreens shall apply to both (or all) windscreens (see Figure 3).

For driver's windscreens, the plan view angle shall be determined using the points defining the primary vision area (see 4.2, see Zone A in Figure 4).

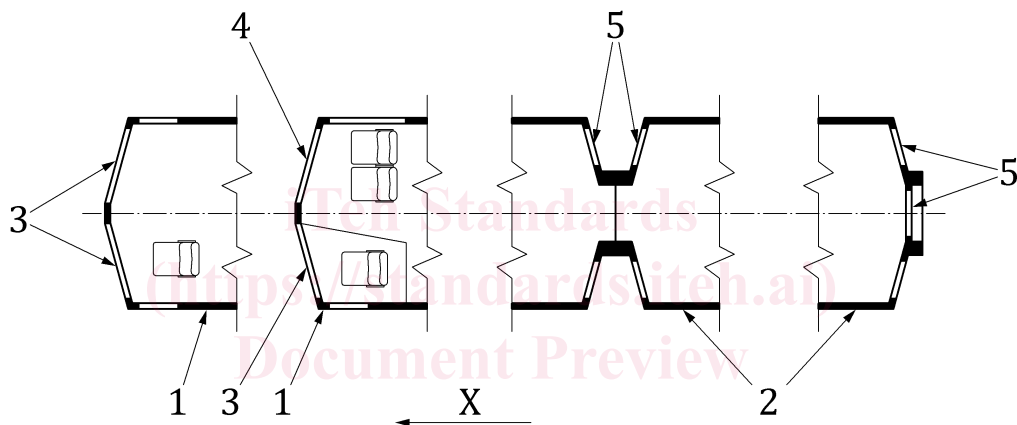

Key

- 1 leading vehicle (alternate cab types shown)
- 2 intermediate and/or end vehicles
- 3 driver's windscreen(s)
- 4 passenger windscreen
- 5 vehicle end windows
- X direction of travel

Figure 3 — Windscreens and body end windows

4.1.3 Passenger windscreens and vehicle end windows

Windscreens or side windscreens that are only provided for observation by passengers shall be referred to as passenger windscreens (see Figure 3).

NOTE Examples of passenger windscreens could be the leading end windows in fully automatic rail vehicles or leading end windows in vehicles where the cab only uses part of the width allowing passenger access to the remainder.

The following may be considered to be equivalent to bodyside windows and therefore outside the scope of this document:


- forward facing vehicle end windows, located at an intermediate end of a vehicle, if they are shielded by an adjacent vehicle from the risk of a direct longitudinal impact (see Figure 3);
- forward facing vehicle end windows, for example in body end doors, where people are not present during operation;
- vehicle end windows that only face to the rear in normal service (see Figure 3).

4.2 Optical areas

A windscreen can be divided into up to three optical areas as shown in Figure 4.

A primary vision area shall be defined for driver's windscreens. The boundary between secondary and peripheral areas shall form part of the windscreen technical specification.

For other types of windscreen and glazing in the scope of this document a primary vision area may not be required and the boundaries between optical areas shall form part of the windscreen technical specification.

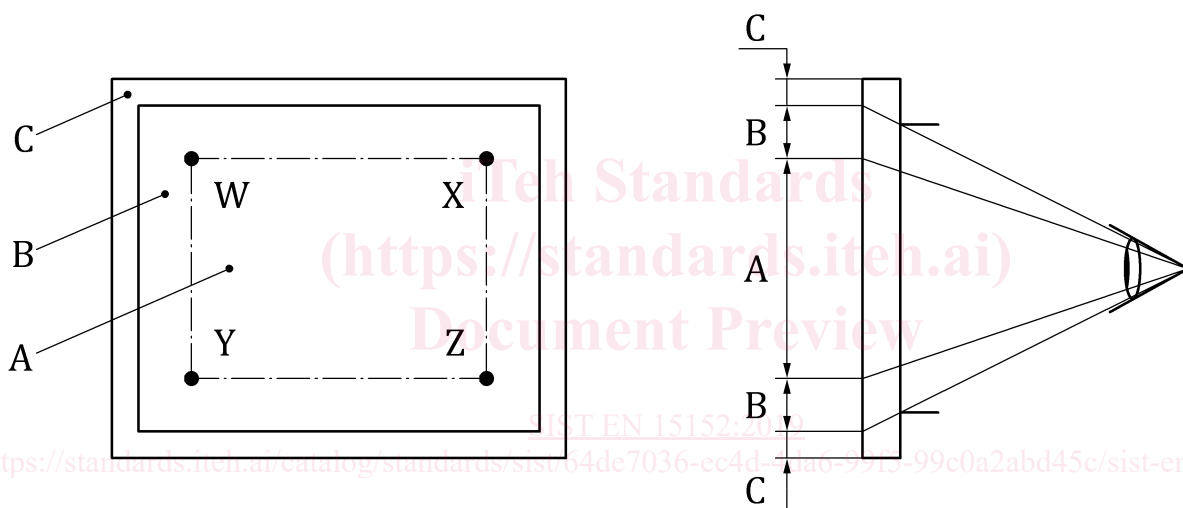

Key

- A primary vision area
- B secondary vision area
- C peripheral area
- O assumed eye position
- 1 driver's sightlines

Figure 4 — Windscreen optical areas

The four points W, X, Y and Z, shown on Figure 4, represent the intersections between the windscreen and the driver's sightlines. These points are joined by lines as shown in Figure 4 to define the primary vision area.

The definition of the driver's sightlines (for the observation of track and signals) is outside of the scope of this document. Data to define these points shall form part of the windscreen technical specification.

NOTE For heavy rail applications, driver's sightlines are defined in EN 16186-1.