
**Earth-mover tyres and rims —
Part 3:
Rims**

Pneumatiques et jantes pour engins de terrassement —

Partie 3: Jantes

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4250-3:2006

<https://standards.iteh.ai/catalog/standards/sist/336249cf-2fca-4022-8384-c956bf759198/iso-4250-3-2006>



Reference number
ISO 4250-3:2006(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4250-3:2006

<https://standards.iteh.ai/catalog/standards/sist/336249cf-2fca-4022-8384-c956bf759198/iso-4250-3-2006>

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Rim identification.....	1
5 Rim contours.....	2
6 Rim knurling.....	2
7 Rim loads and inflation pressures	2
8 Rim dimensions	2
Annex A (informative) Sealing ring grooves and O-rings for earth-mover rims.....	11
Bibliography	13

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 4250-3:2006

<https://standards.iteh.ai/catalog/standards/sist/336249cf-2fca-4022-8384-c956bf759198/iso-4250-3-2006>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4250-3 was prepared by Technical Committee ISO/TC 31, *Tyres, rims and valves*, Subcommittee SC 6, *Off-the-road tyres and rims*.

This third edition cancels and replaces the second edition (ISO 4250-3:1997), which has been technically revised.

ISO 4250 consists of the following parts, under the general title *Earth-mover tyres and rims*:

- *Part 1: Tyre designation and dimensions*
- *Part 2: Loads and inflation pressures*
- *Part 3: Rims*

Earth-mover tyres and rims —

Part 3: Rims

1 Scope

ISO 4250 consists of three parts (see the Foreword) laying down the technical elements relating to designation and dimensions of tyres and rims for earth-moving machinery: it also gives load tables for these tyres.

This part of ISO 4250 sets out the designation, contours and dimensions for rims for narrow and wide base off-road tyres primarily intended for earth-moving machinery.

All dimensions in this part of ISO 4250 are given in millimetres and are applicable to the side of the rim which is in contact with the tyre.

Tyre designations and dimensions, tyre classifications and nomenclature are given in ISO 4250-1, ISO 10571 and ISO 13442.

Annex A gives details of sealing ring grooves and O-rings for earth-mover rims.

<https://standards.iteh.ai/catalog/standards/sist/336249cf-2fca-4022-8384-c956bf759198/iso-4250-3-2006>

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3911, *Wheels and rims for pneumatic tyres — Vocabulary, designation and marking*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 3911 apply.

4 Rim identification

4.1 Codes shall be used to identify:

- a) specified rim diameter, D (see Table 7);
- b) nominal width between flanges;
- c) nominal flange height or rim profile designations.

4.2 The rim marking shall consist of codes for:

- a) specified rim diameter, D ;
- b) nominal width between flanges.

The markings shall be on the weather side of the rim and visible when the tyre is mounted on the rim.

Where a disk is fitted by the rim/wheel manufacturer, the marking shall appear on either the disc or rim base.

Loose flanges shall be marked on an externally visible surface. The marking shall indicate nominal height and nominal diameter.

5 Rim contours

Rim contours are given in Figures 1 to 5 and Tables 1 to 5.

6 Rim knurling

When rim knurling is required, details are given in Figure 6 and Table 6.

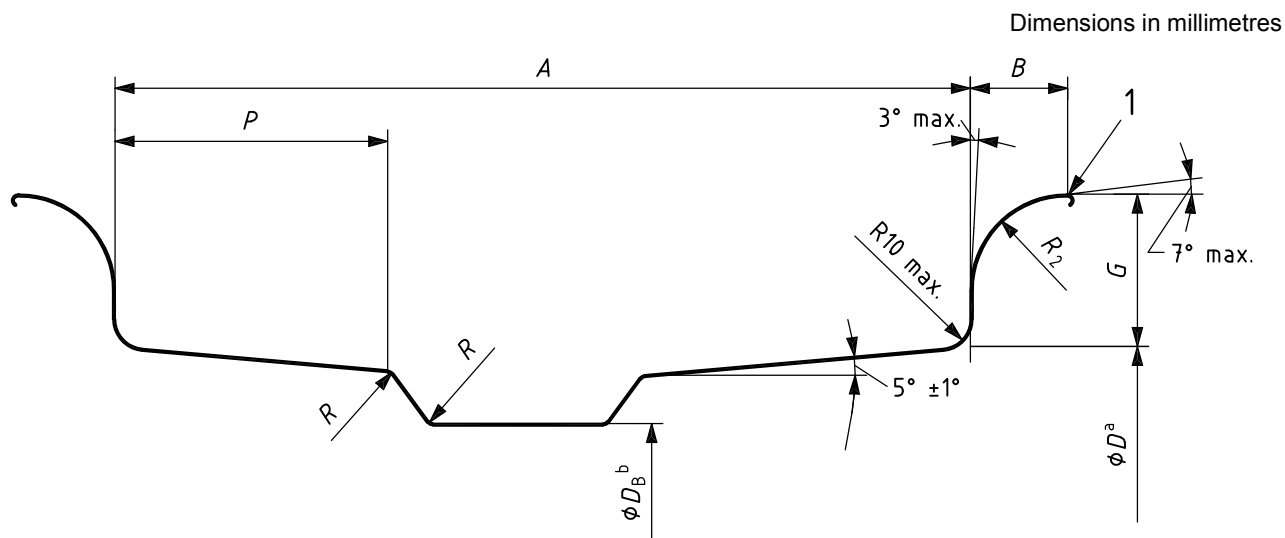
7 Rim loads and inflation pressures

The load and inflation pressure imposed on the rim and wheel shall not exceed the rim and wheel manufacturer's recommendations, even though the tyre may be approved for a higher load or inflation pressure. Consult the rim and wheel manufacturer to determine if rim and wheel capacities are adequate for the intended service.

<https://standards.iteh.ai/catalog/standards/sist/336249cf-2fca-4022-8384-c956bf759198/iso-4250-3-2006>

8 Rim dimensions

Rim dimensions are standardized for size and contour only, and for particular tyre and rim combinations designated to ensure proper mounting and fit of the tyre to the rim.

**Key**

- 1 break corner 1 min.

Flange and bead seat shall be removable on one side.

NOTE This figure applies to rim diameter codes 24, 25, 29, 33, 35, 39, 43, 45, 49, 51, 57 and 63. (See Table 7 for specific rim diameters.)

- a For rim diameter codes < 49, D tolerance: $\pm 0,4$
 For rim diameter codes ≥ 49 , D tolerance: $\pm 0,8$.

The tolerance given for the specified rim diameter, D , is for tyre design purposes only. The actual rim measurement by circumference is established by using a mandrel and a tape.

- b For rim diameter codes ≤ 49 , $D_B = (D - 25,5) \begin{smallmatrix} + 0,5 \\ - 13,0 \end{smallmatrix}$.
 For rim diameter codes = 51 and 57, $D_B = (D - 51,0) \begin{smallmatrix} + 0,5 \\ - 13,0 \end{smallmatrix}$.
 For rim diameter code = 63, $D_B = (D - 63,5) \pm 13,0$.

- c The tyre-mounting side is that side of the rim for which the dimension is applied.

Figure 1 — Contours of 5° full tapered bead seat rims

Table 1 — Contours of 5° full tapered bead seat rims

Dimensions in millimetres

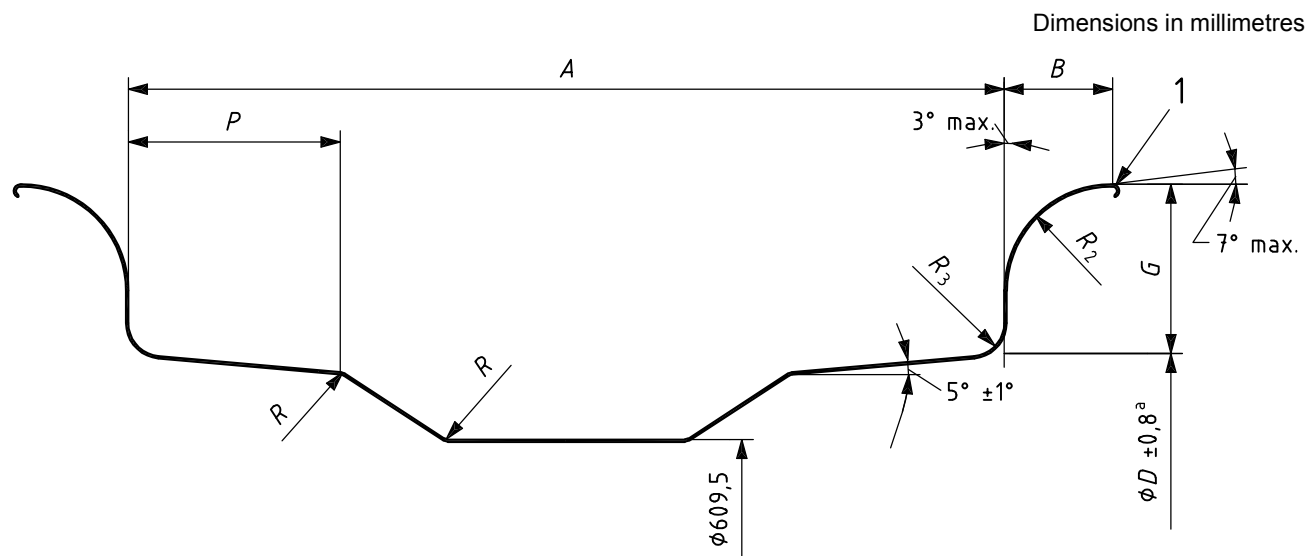
Rim width code/flange height code ^a	<i>A</i>	<i>G</i>	<i>B</i>	<i>P</i>	<i>R</i> ₂	
	± 13,0	± 2,0	min.	min.		tol.
11.25/2.0	286,0	51,0	32,5	101,0	32,0	± 1,5
13.00/2.5	330,0	63,5	45,5	101,0	38,0	± 1,5
13.00/2.75 ^b	330,0	70,0	48,5	101,0	47,5	± 1,5
15.00/3.0	381,0	76,0	55,0	117,5	44,5	± 1,5
15.00/3.0 ^c	381,0	76,0	55,0	117,5	51,0	± 2,0
17.00/2.0	432,0	51,0	32,5	101,0	32,0	± 1,5
17.00/3.5	432,0	89,0	58,0	139,0	51,0	± 2,0
19.50/2.0	495,5	51,0	32,5	101,0	32,0	± 1,5
19.50/2.5	495,5	63,5	45,5	101,0	38,0	± 1,5
19.50/4.0	495,5	101,5	66,0	139,0	57,0	± 2,0
20.00/2.0	508,0	51,0	32,5	101,0	32,0	± 1,5
22.00/3.0	559,0	76,0	55,0	139,0	44,5	± 1,5
22.00/4.0	559,0	101,5	66,0	139,0	57,0	± 2,0
22.00/4.5	559,0	114,5	74,0	139,0	63,5	± 2,0
22.00/4.5 ^d	559,0	114,5	74,0	190,5	63,5	± 2,0
24.00/3.0	609,5	76,0	55,0	139,0	44,5	± 1,5
24.00/3.5	609,5	89,0	58,0	139,0	51,0	± 2,0
24.00/5.0	609,5	127,0	86,5	190,5	70,0	± 2,0
25.00/3.5	635,0	89,0	58,0	139,0	51,0	± 2,0
26.00/3.5	660,5	89,0	58,0	139,0	51,0	± 2,0
26.00/5.0 ^d	660,5	127,0	86,5	190,5	70,0	± 2,0
27.00/3.5	686,0	89,0	58,0	139,0	51,0	± 2,0
27.00/6.0	686,0	152,5	121,9	190,5	84,0	± 2,5
28.00/3.5	711,0	89,0	58,0	139,0	51,0	± 2,0
28.00/4.0	711,0	101,5	66,0	139,0	57,0	± 2,0
29.00/3.5	736,5	89,0	58,0	139,0	51,0	± 2,0
29.00/6.0	736,5	152,5	121,9	190,5	84,0	± 2,5
31.00/4.0	787,5	101,5	66,0	139,0	57,0	± 2,0
32.00/4.0	813,0	101,5	66,0	139,0	57,0	± 2,0
32.00/4.5	813,0	114,5	74,0	139,0	63,5	± 2,0
32.00/5.0	813,0	127,0	86,5	190,5	70,0	± 2,0
32.00/6.5	813,0	165,0	86,5	190,5	70,0	± 2,0
34.00/5.0	863,5	127,0	86,5	190,5	70,0	± 2,0
36.00/4.5	914,5	114,5	74,0	139,0	63,5	± 2,0
36.00/5.0	914,5	127,0	86,5	190,5	70,0	± 2,0
40.00/4.5	1 016,0	114,5	74,0	139,0	63,5	± 2,0
22.00/3.5	559,0	89,0	76,0	139,0	51,0	± 2,0
32.00/6.0	813,0	152,5	121,9	139,0	84,0	± 2,5
44.00/5.0 ^d	1 117,5	127,0	139,5	190,5	70,0	± 2,5
41.00/5.0	1 041,5	127,0	127,0	190,5	70,0	± 2,0

^a Rim width code/flange height code are applicable to specific tyre sizes. See ISO 4250-1 for approved rim/tyre combinations.

^b For rim diameter code > 49.

^c For rim diameter code = 49.

^d For rim diameter code = 51.

**Key**

1 break corner 1 min.

Flange and bead seat shall be removable on one side.

NOTE This figure applies to rim diameter code 25. (See Table 7 for specified rim diameters.)

a The tolerance given for the specified rim diameter, D , is for tyre design purposes only. The actual measurement by circumference is established by using a mandrel and a tape.

b For rims 8.50/1.3 and 10.00/1.5, tolerance $\begin{matrix} +0,5 \\ -6,5 \end{matrix}$.

For larger rims, tolerance $\begin{matrix} +0,5 \\ -13,0 \end{matrix}$.

c The tyre-mounting side is that side of the rim for which the dimension is applied.

Figure 2 — Contours of 5° full tapered bead seat rims

Table 2 — Contours of 5° full tapered bead seat rims

Dimensions in millimetres

Rim width code/flange height code	A		G		B	P	R_2	R_3
		tol.		tol.	min.	min.	$\pm 1,5$	max.
8.50/1.3	216,0	$\pm 5,0$	33,0	$\pm 1,5$	25,5	50,0	23,0	8,0
10.00/1.5	254,0	$\pm 5,0$	38,0	$\pm 1,5$	28,0	59,0	25,5	8,0
12.00/1.3	305,0	$\pm 6,5$	33,0	$\pm 1,5$	25,5	47,0	23,0	10,0
14.00/1.5	355,5	$\pm 6,5$	38,0	$\pm 1,5$	28,0	59,0	25,5	10,0
17.00/1.7	432,0	$\pm 13,0$	43,0	$\pm 2,0$	25,5	60,0	23,0	8,0