
Cisterne za prevoz nevarnega blaga - Digitalni vmesniki za prenos podatkov med vozilom s posodo in stacionarnimi napravami - 1. del: Opredelitev protokola - Upravljanje, merjenje in zajem podatkov

Tanks for transport of dangerous goods - Digital interface for the data transfer between tank vehicle and with stationary facilities - Part 1: Protocol specification - Control, measurement and event data

Tanks für die Beförderung gefährlicher Güter - Digitale Schnittstelle für den Datenaustausch zwischen Tankfahrzeugen und stationären Einrichtungen - Teil 1: Protokollspezifikation - Steuerungs-, Mess- und Ereignisdaten

<https://standards.iteh.ai/catalog/standards/sist/d137f6f3-9040-440f-97f5-089ff28350bf/sist-en-15969-1-2015>

Citernes pour le transport de matières dangereuses - Interface numérique pour le transfert de données entre le véhicule-citerne et les installations fixes - Partie 1: Spécification du protocole - Contrôle, mesurage et données d'évènements

Ta slovenski standard je istoveten z: prEN 15969-1

ICS:

23.020.10	Nepremične posode in rezervoarji	Stationary containers and tanks
35.240.60	Uporabniške rešitve IT v transportu in trgovini	IT applications in transport and trade

oSIST prEN 15969-1:2014

en,fr,de

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 15969-1

January 2014

ICS 35.240.60

Will supersede EN 15969-1:2011

English Version

Tanks for transport of dangerous goods - Digital interface for the data transfer between tank vehicle and with stationary facilities - Part 1: Protocol specification - Control, measurement and event data

Citernes pour le transport de matières dangereuses - Interface numérique pour le transfert de données entre le véhicule-citerne et les installations fixes - Partie 1: Spécification du protocole - Contrôle, mesurage et données d'événements

Tanks für die Beförderung gefährlicher Güter - Digitale Schnittstelle für den Datenaustausch zwischen Tankfahrzeugen und stationären Einrichtungen - Teil 1: Protokollspezifikation - Steuerungs-, Mess- und Ereignisdaten

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 296.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	4
Introduction	5
1 Scope	6
2 Normative references	6
3 Terms and definitions, abbreviations and conventions	6
3.1 Abbreviations	6
3.2 Terms and definitions	7
3.3 Conventions	8
4 Hardware interface.....	9
5 Basic protocol layer	9
5.1 FTL-frame (frame)	9
5.2 Frame flow (handshake).....	10
5.3 Delay and timeout.....	16
5.4 CRC16 Checksum	16
6 Data protocol layer (FTL-data protocol)	17
6.1 Client (OBC) and server (TVE).....	17
6.2 Syntax of data in datagrams	17
6.3 Nodes, subnodes, variables	17
6.4 Format identifiers.....	18
6.5 Types of variable values	20
6.6 Kinds of nodes	21
7 FTL-Data	22
7.1 General.....	22
7.2 Record and field types	22
7.3 Systemwide variables (subnode SYSTEM)	23
7.4 Variables related to global positioning system (subnode GPS).....	26
7.5 Accessing a printer on TVE-side (subnode PRN)	26
7.6 Compartment information (subnode COMP)	30
7.7 Notification about changes (subnode NOTIFY).....	31
7.8 Information about driver (subnode DRIVER)	32
7.9 Information about the vehicle (variable VEHICLE_ID)	33
7.10 Access to filesystem on TVE (subnode FS).....	33
7.11 Auxiliary (subnode AUX).....	39
7.12 Order management (subnode ORDER)	39
7.13 Goods and service database	43
7.14 FTL—logfile (subnodes LOG).....	45
7.15 Required variables.....	73
7.16 NAK ID.....	73
8 Routing for multiple TVE.....	74
8.1 Purpose.....	74
8.2 Routing solution	74
8.3 Routing example	74
9 Communication with office	75
9.1 General.....	75
9.2 Simple file transfer.....	76
9.3 FTL over TCP/IP	77
10 Communication Examples.....	79
10.1 Examples for Basic Protocol Layer level	79

10.2	Examples for data protocol layer.....	81
Annex A	(normative) Node tree	83
Annex B	(normative) Test FTL.....	84
B.1	Overview.....	84
B.2	Basic Protocol Layer.....	84
B.2.1	Frame Tests	84
B.2.2	CRC-error	85
B.2.3	Delay and Timeout.....	85
B.3	Data Protocol Layer.....	86
B.3.1	Test of Toggling.....	86
B.3.2	Test of the FTL data layer	87
B.3.3	Test of the required FTL nodes.....	87
B.3.4	Optional System Subnodes.....	91
B.3.5	Optional Node Prn	92
B.3.6	Node Comp	94
B.4	Application Layer	100
B.4.1	Test of the L-File.....	100
B.4.2	Test of the LH-File	100
B.4.3	Test for the Filling of the NodeList	101
B.4.4	Sequence Test	101

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15969-1:2015

<https://standards.iteh.ai/catalog/standards/sist/d137f6f3-9040-440f-97f5-089ff28350bf/sist-en-15969-1-2015>

Foreword

This document (prEN 15969-1:2014) has been prepared by Technical Committee CEN/TC 296 "Tanks for transport of dangerous goods", the secretariat of which is held by AFNOR.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 15969-1:2011.

According to edition EN 15969-1:2011 the following fundamental changes are given:

- The following fields in Table 13 added: L0403, L2004, L4106 and L4208;
- Table 13 in field L2002 event codes added and in field L4203 access paths added;
- Figures in 5.2 corrected;
- Examples in 10.2 and Annex B corrected.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

This European Standard "*Tanks for transport of dangerous goods — Digital interface for the data transfer between tank vehicle and with stationary facilities*" consists of 2 parts:

Part 1 — Protocol Specification – Control, measurement and event data

Part 2 — Commercial and logistic data

This European Standard forms part of a coherent standards programme comprising the following standards:

EN 13616, *Overfill prevention devices for static tanks for liquid petroleum fuels*

EN 13922, *Tanks for transport of dangerous goods — Service equipment for tanks — Overfill prevention systems for liquid fuels*

EN 14116, *Tanks for transport of dangerous goods — Digital interface for the product recognition device for liquid fuels*


EN 15207, *Tanks for the transport of dangerous goods — Plug/socket connection and supply characteristics for service equipment in hazardous areas with 24 V nominal supply voltage*

EN 15208, *Tanks for transport of dangerous goods — Sealed parcel delivery systems — Working principles and interface specifications*

EN 15969-2, *Tanks for transport of dangerous goods — Digital interface for the data transfer between tank vehicle and with stationary facilities — Part 2: Commercial and logistic data*

Introduction

FTL is an acronym for **Fuel Truck Link**, the interface between electronic system(s) on board of a tank vehicle (tank-vehicle-equipment) and any external computer, e.g. an on-board-computer installed in the driver's cabin; for illustration see Figure 1.

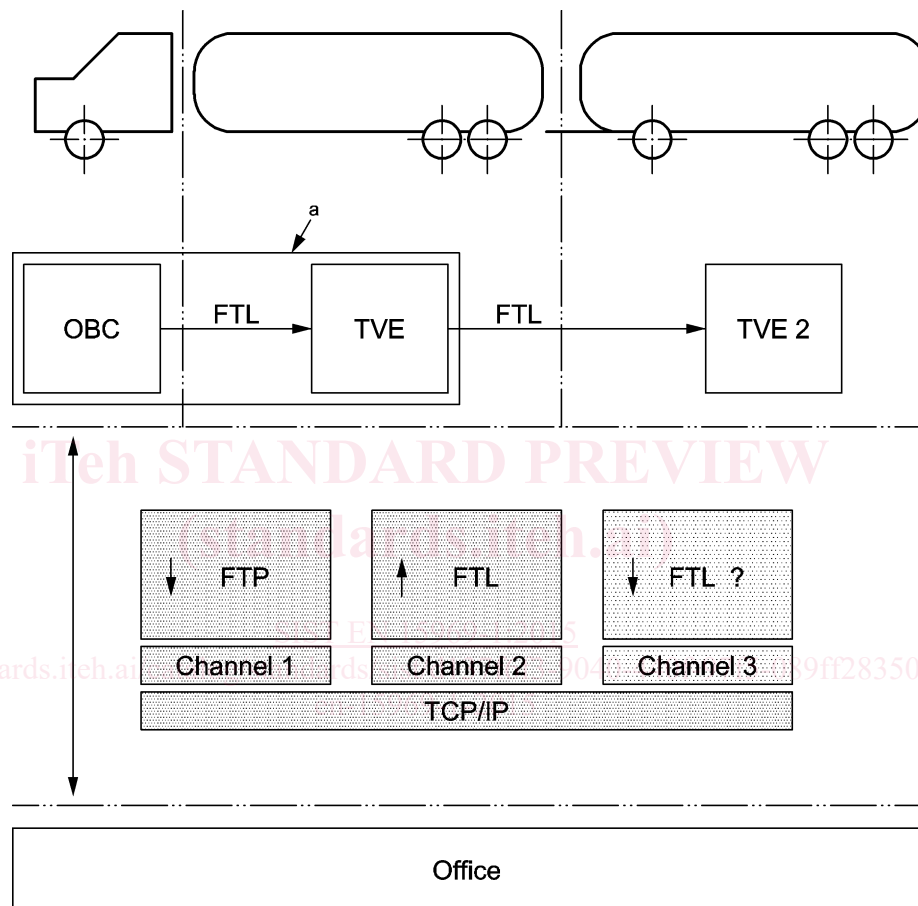

Key

- direction of communication (client → server)
- a may be either two independent units or one single unit which incorporates both functions OBC and TVE

Figure 1

1 Scope

This European Standard specifies data protocols and data format for the interfaces between electronic equipment (TVE), on-board computer (OBC) of the tank vehicle and stationary equipment for all interconnecting communication paths.

This European Standard specifies the basic protocol FTL used in the communication (basic protocol layer), the format and structure of FTL-data to be transmitted (data protocol layer) and describes the content of the FTL-data.

NOTE This data protocol may be used for other application e.g. between stationary tank equipment and offices.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 13616, *Overfill prevention devices for static tanks for liquid petroleum fuels*

EN 13922, *Tanks for transport of dangerous goods — Service equipment for tanks — Overfill prevention systems for liquid fuels*

EN 14116:2007+A2:2010, *Tanks for transport of dangerous goods — Digital interface for the product recognition device*

EN 15208:2007, *Tanks for transport of dangerous goods — Sealed parcel delivery systems — Working principles and interface specifications*

EN 15969-2:2011, *Tanks for transport of dangerous goods — Digital interface for the data transfer between tank vehicle and with stationary facilities — Part 2: Commercial and logistic data*

ISO 639-1, *Codes for the representation of names of languages — Part 1: Alpha-2 code*

ISO/IEC 10646: 2011, *Information technology — Universal Coded Character Set (UCS)*

DIN 51757:2011, *Testing of mineral oils and related materials — Determination of density*

3 Terms and definitions, abbreviations and conventions

For the purposes of this document, the following terms and definitions, abbreviations and conventions apply.

3.1 Abbreviations

ACK	acknowledge controlframe
ADF	additional dataframe
ASCII	American Standard Code for Information Interchange
CAN	cancel controlframe
CRC	cyclic redundancy checksum
CSV	comma separated variable record

COP	crossover prevention
EOR	end of record dataframe
EOT	end of transmission dataframe
FTL	fuel-truck-link name of the interface
FTP	file transfer protocol
L_FILE	log file
LH_FILE	log file header
NAK	not acknowledge controlframe
OBC	on-board-computer
	NOTE One party in the FTL-communication (the client).
PID	product identification device according to EN 14116
SYN	synchronisation controlframe
SPDS	sealed parcel delivery system according to EN 15208
TEF	CRC transmission error controlframe
TVE	tank-vehicle-equipment
	NOTE One party in the FTL-communication (the server).
OpCode	operation code

3.2 Terms and definitions

3.2.1

downgrade

intentional loading and discharge of a higher grade product (substance) into a lower grade product of the same group

3.2.2

answer time

time between last frame character transmitted from OBC (client) and first character frame received from TVE (server)

3.2.3

array

collection of elements which have the same structure and are able to be accessed individually by means of an index

3.2.4

client

responsible for initiation and control of data exchange

3.2.5

field

element of a datagram delimited by separators

prEN 15969-1:2014 (E)**3.2.6****frame**

data packet with variable length and defined structure

3.2.7**list**

type of variables consisting of a number of records

3.2.8**MaxFrameSize**

maximum number of characters in a frame

3.2.9**node**

part of an address of a variable

3.2.10**graphic character**

according to Annex D of ISO/IEC 10646-1:2011

3.2.11**record**

ordered set of fields, stored contiguously

3.2.12**server**

program which provides service to client programs

3.2.13**subnode**

subpart of an address of a variable

3.2.14**datagram**

instruction or answer to an instruction, which comprises an OpCode and operand

3.2.15**transaction**

complete request-answer-cycle

3.2.16**type identifier**

character code for the frame type

3.3 Conventions**3.3.1 Syntax conventions**

When describing the syntax of e.g. a datagram, some parts are required.

Every abstract part shall get a name, which is encapsulated by "<" and ">". Optional arguments are additionally encapsulated in square brackets.

EXAMPLE <field>[,<value>]

<field> has always to be given (required). <value> is optional, but when given, it shall be preceded by a comma.

3.3.2 Presentation of communication exchange

In this document several examples can be found, demonstrating the flow of communication.

To illustrate the direction, data sent by the TVE (server) is shown indented.

EXAMPLE

```

client request 1

    server response 1
    server response 2
    server response 3

client request 2

```

This means, that the command "client request n" shall be transmitted by the OBC, whereas the lines "server response n" were transmitted by the TVE.

3.3.3 Numbers

Numbers may either be coded in decimal format (e.g. 12) or in hexadecimal format (e.g. 1Bh). In the latter case, the number shall be followed by the character "h".

4 Hardware interface

Communication shall only take place between two parties (point-to-point) the TVE and OBC.

For communication an asynchronous line shall be used (RS232, RS422 or RS485). The OBC and TVE start up and default settings shall be 9600 baud, 8 data bits, 1 stop bit and no parity.

The TVE may optionally support other baud rates (switching and switching back see 7.3.6).

5 Basic protocol layer

5.1 FTL-frame (frame)

The FTL-frame shall be according to Figure 2.

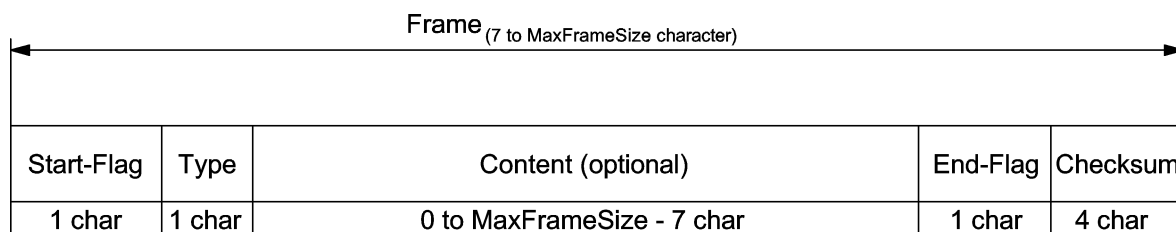


Figure 2

A frame shall have the following minimum requirements:

- always starts with a Start—Flag
- always followed by type identifier
- 1 End-Flag

prEN 15969-1:2014 (E)

- 4 character Checksum (valid or invalid)
- frame length limited to MaxFrameSize

Frames which do not fulfil these requirements shall be ignored and not answered. A new frame starts upon the receipt of a Start-Flag. Any character received before the Start-Flag shall be ignored. All devices using the FTL-protocol shall be able to receive complete frames of MaxFrameSize characters. A frame shall be answered even if it contains an invalid checksum or incorrect characters (see 5.2).

If the type identifier in a frame is unknown a NAK shall be sent.

MaxFrameSize

The MaxFrameSize shall be 255 characters.

Start—Flag

The ASCII code 02h (start of text <STX>) shall be used as the Start-Flag.

Type identifier

The type identifier shall be according to Table 1.

Content

The content may be empty or shall contain up to MaxFrameSize minus 7 characters.
All characters in the content shall be printable characters.

End-Flag

The ASCII code 03h (End of Text <ETX>) shall be used as the End—Flag.



Checksum

The Checksum <CRC> verifies the integrity of a frame. It covers all characters from Start—Flag to End—Flag including these flags. A CRC16 (16 bit) value in hexadecimal format (always 4 characters long) is used and shall consist of the printable ASCII character “0”..”9” or “A”..”F” (example: the value 1AC9h shall be sent with 4 ASCII character “1AC9”). The algorithm for the calculation is described in 5.4.

5.2 Frame flow (handshake)

The character immediately following the Start-Flag defines the frame type. The different frame groups and their frame types are described in Table 1.

Table 1 — Frame groups and frame types

Frame group	Frame type	Abbreviation	Additional fields	Type identifier	
				client to server	server to client
Dataframe 	end of record frame	EOR	data	R, V	r, v
	additional dataframe following frame	ADF	data	L, P	l, p
	end of transmission frame	EOT	data	E, I	e, i
Controlframe 	acknowledge frame	ACK	no	A	a
	synchronisation/wait frame	SYN	no	- ¹⁾	s
	cancel frame	CAN	no	C	c
	CRC transmission error frame	TEF	no	T	t
	not acknowledge frame	NAK	NAK-ID according to Table 17	- ¹⁾	n
¹⁾ Not applicable.					

To distinguish the direction of data (client to server or server to client) upper and lower case type character shall be used.

Every communication shall start with a dataframe.

Every dataframe from the server shall be answered by a controlframe from the client.

Every frame from the client shall be answered by a frame from the server.

If a dataframe is received by the server when an acknowledge is expected it shall be treated as a cancel frame (CAN) regarding the preceding transaction.

Every data frame on each side, independently, shall be flagged alternatively (toggled) with the secondary (V,P,I) and primary (R,L,E) type identifier. If subsequent dataframes with identical type identifier are received, these shall be treated as a repetition with identical data but shall be answered as the original, see Figure 11. This prevents redundant entries in lists resulting from communication faults.

After the startup of the system the first dataframe on each side shall start with the primary type identifier (R,L,E). The first request after startup shall not be a SET-request to a list.

EXAMPLES Examples of frame flows:

- Transaction that requires only one datagram in either direction, each fitting into a single frame, see Figure 3.

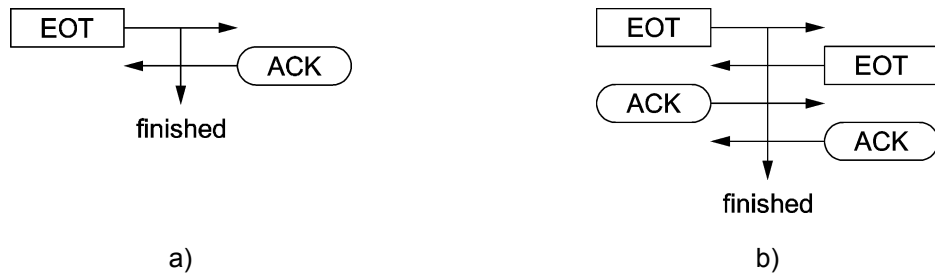


Figure 3

- Transactions that require more than one datagram (e.g multi record transfer), EOR—frames shall indicate that additional datagrams will follow. An EOT—frame shall be the last dataframe of the transaction, see Figure 4.

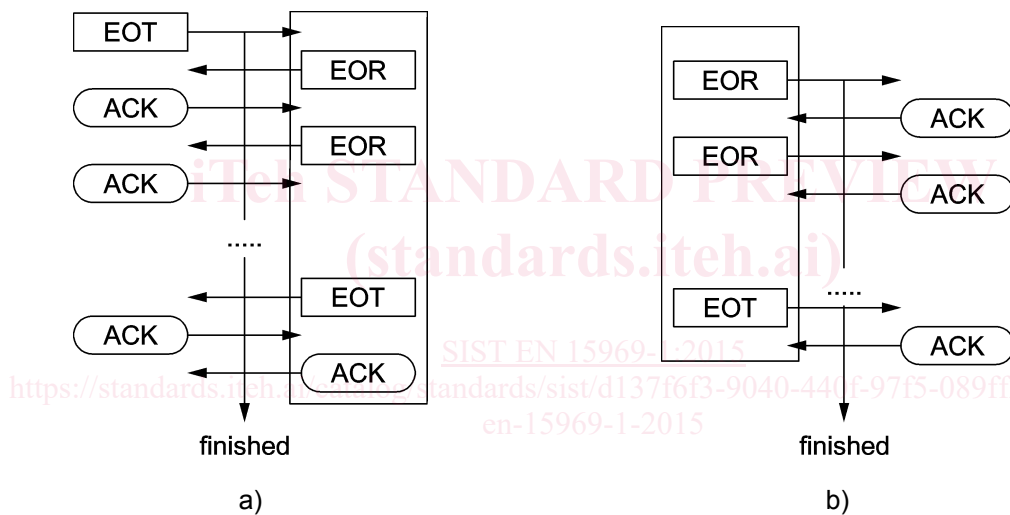


Figure 4

- Datagrams that require more than one frame, because MaxFrameSize is too small to hold a complete datagram shall be split into one or more ADF—frames and an EOT—frame or EOR-frame as appropriate, see Figure 5.

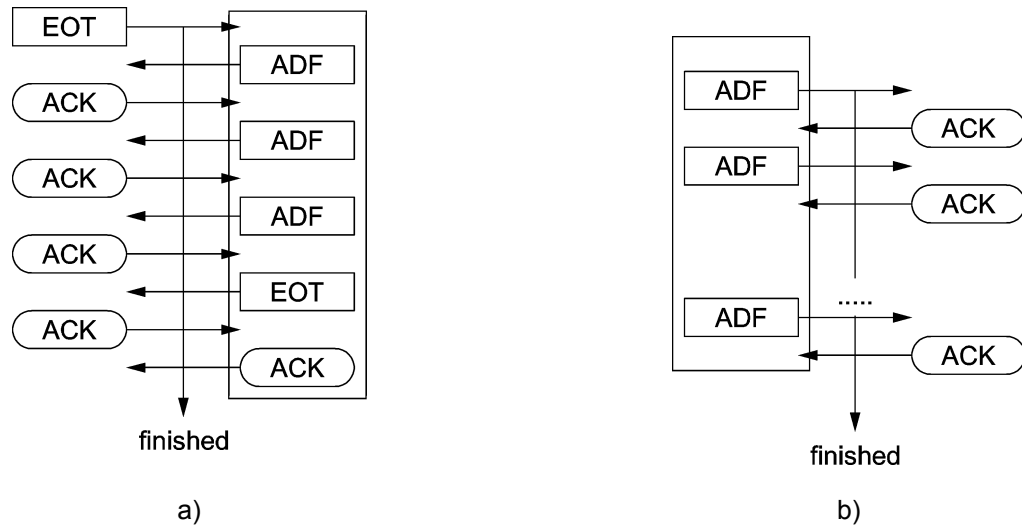


Figure 5

- The preceding examples may be combined as in Figure 6:

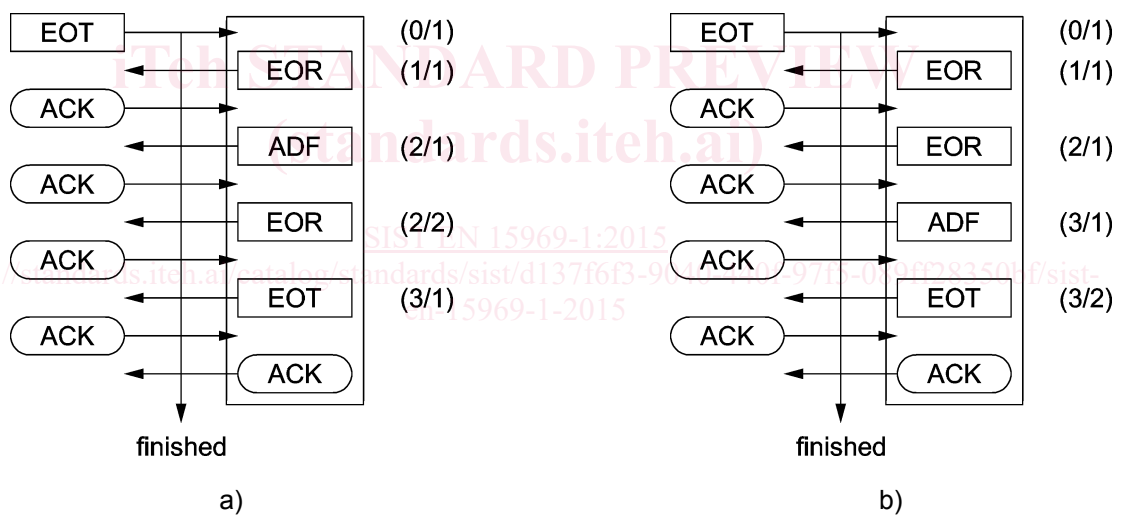


Figure 6