

SLOVENSKI STANDARD

SIST EN 3682-002:2014

01-februar-2014

Nadomešča:

SIST EN 3682-002:2009

Aeronavtika - Konektorji, vtič in vtičnica, električni, pravokotni, zamenljivi tip, s stojalom in ploščo, s stalno delovno temperaturo do 150 °C - 002. del: Specifikacija lastnosti in razporeditev kontaktov

Aerospace series - Connectors, plug and receptacle, electrical, rectangular, interchangeable insert type, rack to panel, operating temperature 150 °C continuous - Part 002: Specification of performance and contact arrangements

Luft- und Raumfahrt - Elektrischer Rechtecksteckverbinder, freie und feste Bauform, auswechselbare Isolierkörper, Gestell-Einschubsteckverbinder, Betriebstemperatur 150 °C konstant - Teil 002: Leistungsdaten und Kontaktanordnungen

Série aérospatiale - Connecteurs électriques rectangulaires rackables, fiches et embases, à inserts interchangeables, température d'utilisation 150 °C continu - Partie 002 : Spécification de performances et arrangements de contacts

Ta slovenski standard je istoveten z: EN 3682-002:2013

ICS:

49.060

Letalska in vesoljska
električna oprema in sistemi

Aerospace electric
equipment and systems

SIST EN 3682-002:2014

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 3682-002:2014

<https://standards.iteh.ai/catalog/standards/sist/4ad81e38-6457-444c-8211-80c0f7a96252/sist-en-3682-002-2014>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 3682-002

September 2013

ICS 49.060

Supersedes EN 3682-002:2006

English Version

Aerospace series - Connectors, plug and receptacle, electrical, rectangular, interchangeable insert type, rack to panel, operating temperature 150 °C continuous - Part 002: Specification of performance and contact arrangements

Série aérospatiale - Connecteurs électriques rectangulaires rackables, fiches et embases, à inserts interchangeables, température d'utilisation 150 °C continu - Partie 002 : Spécification de performances et arrangements de contacts

Luft- und Raumfahrt - Elektrischer Rechtecksteckverbinder, freie und feste Bauform, auswechselbare Isolierkörper, Gestell-Einschubsteckverbinder, Betriebstemperatur 150 °C konstant - Teil 002: Leistungsdaten und Kontaktanordnungen

This European Standard was approved by CEN on 8 May 2013.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
Introduction	4
1 Scope	4
2 Normative references	4
3 Description of models	6
4 Terms and definitions	6
5 Operating conditions.....	6
5.1 Permissible cables.....	6
5.2 Operating characteristics	7
5.2.1 Electrical conditions.....	7
5.2.2 Climatic conditions.....	7
5.2.3 Mechanical conditions	7
6 Product standards	7
7 Polarization.....	8
8 Contact arrangements and insert combinations.....	10
8.1 Contact arrangements.....	10
8.2 Insert combinations.....	20
9 Contacts.....	20
10 Sealing plugs.....	20
11 Tooling	20
12 Assembly and wiring instruction	20

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 3682-002:2014](https://standards.iteh.ai/catalog/standards/sist/4ad81e38-6457-444c-8211-80c0f7a96252/sist-en-3682-002-2014)

<https://standards.iteh.ai/catalog/standards/sist/4ad81e38-6457-444c-8211-80c0f7a96252/sist-en-3682-002-2014>

Foreword

This document (EN 3682-002:2013) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2014, and conflicting national standards shall be withdrawn at the latest by March 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 3682-002:2006.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

SIST EN 3682-002:2014

<https://standards.iteh.ai/catalog/standards/sist/4ad81e38-6457-444c-8211-80c0f7a96252/sist-en-3682-002-2014>

Introduction

This family of connectors is derived from MIL-C-83527 with which it is intermateable.

1 Scope

This European Standard defines the common conditions for plug and receptacle, rack to panel with interchangeable insulators and continuous temperature rating 150 °C.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 3155-026, *Aerospace series — Electrical contacts used in elements of connection — Part 026: Contacts, electrical, male, type A, crimp, class R — Product standard*

EN 3155-027, *Aerospace series — Electrical contacts used in elements of connection — Part 027: Contacts, electrical, female, type A, crimp, class R — Product standard*

EN 3155-028, *Aerospace series — Electrical contacts used in elements of connection — Part 028: Contacts, electrical, coaxial, shielded, size 16, male, type D, crimp, class R — Product standard*

EN 3155-029, *Aerospace series — Electrical contacts used in elements of connection — Part 029: Contacts, electrical, coaxial, shielded, size 16, female, type D, crimp, class R — Product standard*

EN 3155-030, *Aerospace series — Electrical contacts used in elements of connection — Part 030: Contacts, electrical, coaxial, shielded, size 12, male, type D, crimp, class R — Product standard*

EN 3155-031, *Aerospace series — Electrical contacts used in elements of connection — Part 031: Contacts, electrical, coaxial, shielded, size 12, female, type D, crimp, class R — Product standard*

EN 3155-032, *Aerospace series — Electrical contacts used in elements of connection — Part 032: Contacts, electrical, coaxial, 50 ohms, size 5, male, type D, crimp, class R — Product standard*

EN 3155-033, *Aerospace series — Electrical contacts used in elements of connection — Part 033: Contacts, electrical, coaxial, 50 ohms, size 5, female, type D, crimp, class R — Product standard*

EN 3155-034, *Aerospace series — Electrical contacts used in elements of connection — Part 034: Contacts, electrical, triaxial, size 08, male, type D, crimp, class R — Product standard*

EN 3155-035, *Aerospace series — Electrical contacts used in elements of connection — Part 035: Contacts, electrical, triaxial, size 08, female, type D, crimp, class R — Product standard*

EN 3155-038, Aerospace series — Electrical contacts used in elements of connection — Part 038: Contacts, electrical, coaxial, size 16, male 038, type D, solder, class R — Product standard ¹⁾

EN 3155-039, Aerospace series — Electrical contacts used in elements of connection — Part 039: Contacts, electrical, coaxial, size 16, female, type D, solder, class R — Product standard

EN 3155-040, Aerospace series — Electrical contacts used in elements of connection — Part 040: Contacts, electrical, coaxial, size 12, male, type D, solder, class R — Product standard

EN 3155-041, Aerospace series — Electrical contacts used in elements of connection — Part 041: Contacts, electrical, coaxial, size 12, female, type D, solder, class R — Product standard

EN 3155-042, Aerospace series — Electrical contacts used in elements of connection — Part 042: Contacts, electrical, triaxial, size 08, male 042, type D, solder, class P — Product standard

EN 3155-043, Aerospace series — Electrical contacts used in elements of connection — Part 043: Contacts, electrical, triaxial, size 08, female 043, type D, solder, class P — Product standard

EN 3155-063, Aerospace series — Electrical contacts used in elements of connection — Part 063: Contacts, electrical, coaxial, 50 ohms, size 1, male, type D, solder, class R — Product standard

EN 3155-064, Aerospace series — Electrical contacts used in elements of connection — Part 064: Contacts, electrical, coaxial, 50 ohms, size 1, female, type D, solder, class R — Product standard

EN 3155-072, Aerospace series — Electrical contacts used in elements of connection — Part 072: Contacts, electrical, quadrax, size 08, male, type E, crimp, class R — Product standard ¹⁾

EN 3155-073, Aerospace series — Electrical contacts used in elements of connection — Part 073: Contacts, electrical, quadrax, size 08, female, type E, crimp, class R — Product standard ¹⁾

EN 3197, Aerospace series — Design and installation of aircraft electrical and optical interconnection systems

EN 3682 (all parts), Aerospace series — Connectors, plug and receptacle, electrical, rectangular, interchangeable insert type, rack to panel, operating temperature 150 °C continuous — Part 001: Technical specification

EN 4529-002, Aerospace series — Elements of electrical and optical connection — Sealing plugs — Part 002: Index of product standards

MIL-C-83527A, Connectors, plug and receptacle, electrical, rectangular multiple insert type, rack to panel, environment resisting, 150 °C total continuous operating temperature ²⁾

TR 4679, Aerospace series — Connector, optical rectangular, multicontacts, rack and panel, quadrax cavity, 2,5 diameter fixed ferrule, operating temperatures – 65 °C to 125 °C — Part 001: Technical specification ³⁾

1) In preparation at the date of publication of this standard.

2) Published by: DoD National (US) Mil. Department of Defense. <http://www.defenselink.mil/>

3) Published as ASD-STAN Technical Report at the date of publication of this standard. <http://www.asd-stan.org/>

EN 3682-002:2013 (E)

3 Description of models

Electrical rectangular rack panel connectors, environmental resisting with 3 shell sizes 2, 3 and 4, crimp contact class R.

4 Terms and definitions

See EN 3682-001.

5 Operating conditions

5.1 Permissible cables

The performance of these connectors is achieved with the cables of the dimensions given in Table 1 and using the accessories and wiring tools specified.

Table 1

Size		Size of conductors Standard cables	Outer diameter of cables mm	
Contact	Barrel	AWG ^a	min.	max.
22	22	22 24 26	0,76	1,32
20	20	20 22 24	0,89	1,52
16	16	16 18 20	1,21	2,03
12	12	12 14	2,31	2,90
Cavity #8		—	3,69	6,86
Cavity #5		—	4,85	5,49
Cavity #1		—	10,62	10,97
^a AWG: Closest American Wire Gauge.				

5.2 Operating characteristics

5.2.1 Electrical conditions

- Rated current: according to standards for contacts
- Insulation resistance at ambient temperature: 5 000 M Ω
- Withstand voltage at sea level:
 - 22 AWG contacts: 1 300 V r.m.s
 - thicker gauge contacts 1 500 V r.m.s
 - triaxial contacts 500 V r.m.s
 - coaxial contacts 500 V r.m.s
 - quadrax contacts 500 V r.m.s
- Withstand voltage at 33 000 m
 - connectors mated together 750 V r.m.s
 - connectors unmated 200 V r.m.s

5.2.2 Climatic conditions

- Operating temperatures:
 - minimum temperature: - 65 °C
 - maximum temperature: 150 °C
- Corrosion resistance and fluid resistance: see EN 3682-001

5.2.3 Mechanical conditions

Mechanical endurance: 500 mating and unmating operations.

6 Product standards

See Table 2.

Table 2

Component	EN 3682-
Inserts	003
Receptacle size 2	004
Plug size 2	005
Receptacle size 3	006
Plug size 3	007
Receptacle size 4	008
Plug size 4	009

EN 3682-002:2013 (E)

7 Polarization

Figures 1 and 2 and Tables 3 and 4 show the various positions of the coding keys, which provide 99 standard different locating codes.

The shaded area indicates the male key and the lighted area corresponds to the female key. Keys are viewed from the front of the connector, and the top of the connector is facing upwards.

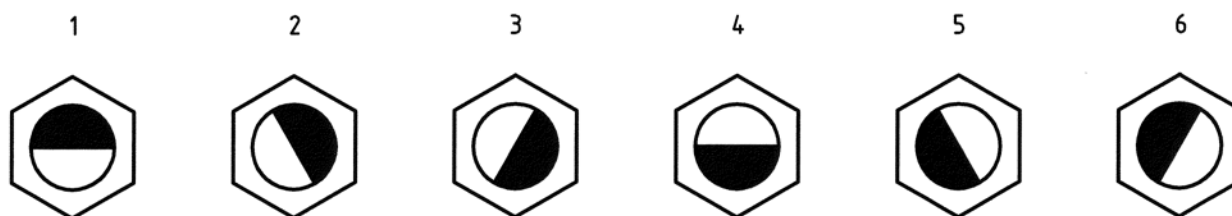


Figure 1

Table 3

Position	left	centre	right	Position	left	centre	right	Position	left	centre	right	Position	left	centre	right
00	Keys not assembled			25	1	1	3	50	2	2	5	75	3	3	1
01	1	1	1	26	2	1	3	51	3	2	5	76	4	3	1
02	2	1	1	27	3	1	3	52	4	2	5	77	5	3	1
03	3	1	1	28	4	1	3	53	5	2	5	78	6	3	1
04	4	1	1	29	5	1	3	54	6	2	5	79	1	3	6
05	5	1	1	30	6	1	3	55	1	2	4	80	2	3	6
06	6	1	1	31	1	1	2	56	2	2	4	81	3	3	6
07	1	1	6	32	2	1	2	57	3	2	4	82	4	3	6
08	2	1	6	33	3	1	2	58	4	2	4	83	5	3	6
09	3	1	6	34	4	1	2	59	5	2	4	84	6	3	6
10	4	1	6	35	5	1	2	60	6	2	4	85	1	3	5
11	5	1	6	36	6	1	2	61	1	2	3	86	2	3	5
12	6	1	6	37	1	1	1	62	2	2	3	87	3	3	5
13	1	1	5	38	2	2	1	63	3	2	3	88	4	3	5
14	2	1	5	39	3	2	1	64	4	2	3	89	5	3	5
15	3	1	5	40	4	2	1	65	5	2	3	90	6	3	5
16	4	1	5	41	5	2	1	66	6	2	3	91	1	3	4
17	5	1	5	42	6	2	1	67	1	2	2	92	2	3	4
18	6	1	5	43	1	2	6	68	2	2	2	93	3	3	4
19	1	1	4	44	2	2	6	69	3	2	2	94	4	3	4
20	2	1	4	45	3	2	6	70	4	2	2	95	5	3	4
21	3	1	4	46	4	2	6	71	5	2	2	96	6	3	4
22	4	1	4	47	5	2	6	72	6	2	2	97	1	3	3
23	5	1	4	48	6	2	6	73	1	3	1	98	2	3	3
24	6	1	4	49	1	2	5	74	2	3	1	99	3	3	3

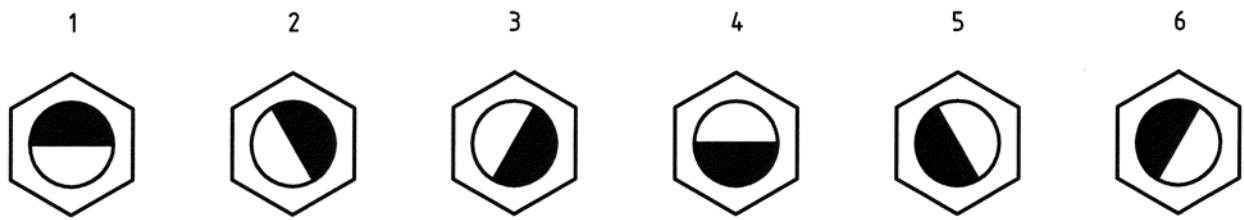


Figure 2

Table 4

Position	left	centre	right	Position	left	centre	right	Position	left	centre	right	Position	Left	centre	right
00	Keys not assembled			25	2	4	4	50	6	3	3	75	4	2	2
01	4	4	4	26	2	4	3	51	6	3	2	76	4	2	1
02	4	4	3	27	2	4	2	52	6	3	1	77	4	2	6
03	4	4	2	28	2	4	1	53	6	3	6	78	4	2	5
04	4	4	1	29	2	4	6	54	6	3	5	79	5	2	4
05	4	4	6	30	2	4	5	55	1	3	4	80	5	2	3
06	4	4	5	31	3	4	4	56	1	3	3	81	5	2	2
07	5	4	4	32	3	4	3	57	1	3	2	82	5	2	1
08	5	4	3	33	3	4	2	58	1	3	1	83	5	2	6
09	5	4	2	34	3	4	1	59	1	3	6	84	5	2	5
10	5	4	1	35	3	4	6	60	1	3	5	85	6	2	4
11	5	4	6	36	3	4	5	61	2	3	4	86	6	2	3
12	5	4	5	37	4	3	4	62	2	3	3	87	6	2	2
13	6	4	4	38	4	3	3	63	2	3	2	88	6	2	1
14	6	4	3	39	4	3	2	64	2	3	1	89	6	2	6
15	6	4	2	40	4	3	1	65	2	3	6	90	6	2	5
16	6	4	1	41	4	3	6	66	2	3	5	91	1	2	4
17	6	4	6	42	4	3	5	67	3	3	4	92	1	2	3
18	6	4	5	43	5	3	4	68	3	3	3	93	1	2	2
19	1	4	4	44	5	3	3	69	3	3	2	94	1	2	1
20	1	4	3	45	5	3	2	70	3	3	1	95	1	2	6
21	1	4	2	46	5	3	1	71	3	3	6	96	1	2	5
22	1	4	1	47	5	3	6	72	3	3	5	97	2	2	4
23	1	4	6	48	5	3	5	73	4	2	4	98	2	2	3
24	1	4	5	49	6	3	4	74	4	2	3	99	2	2	2