



Designation: D 3241 – 05

An American National Standard



Designation 323/99

## Standard Test Method for Thermal Oxidation Stability of Aviation Turbine Fuels (JFTOT Procedure)<sup>1</sup>

This standard is issued under the fixed designation D 3241; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

*This standard has been approved for use by agencies of the Department of Defense.*

### 1. Scope\*

1.1 This test method covers the procedure for rating the tendencies of gas turbine fuels to deposit decomposition products within the fuel system.

1.2 The values stated in SI units are to be regarded as the standard. The inch-pound values given in parentheses are for information only. The differential pressure values in mm Hg are defined only in terms of this test method.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* For specific warning statements, see 6.1.1, 7.2, 7.2.1, 7.3, 11.1.1, and Annex A3.

### 2. Referenced Documents

#### 2.1 ASTM Standards:<sup>2</sup>

- D 1655 Specification for Aviation Turbine Fuels
- D 4306 Practice for Aviation Fuel Sample Containers for Tests Affected by Trace Contamination
- E 177 Practice for Use of the Terms Precision and Bias in ASTM Test Methods
- E 691 Practice for Conducting an Interlaboratory Study to Determine the Precision of a Test Method

#### 2.2 ASTM Adjuncts:<sup>3</sup>

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee D02 on Petroleum Products and Lubricants and is the direct responsibility of Subcommittee D02.J0 on Aviation Fuels.

Current edition approved Mar. 1, 2005. Published March 2005. Originally approved in 1973. Last previous edition approved in 2004 as D 3241 – 04.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> Available from ASTM International Headquarters. Order Adjunct No. ADJD3241.

### Color Standard for Tube Deposit Rating

### 3. Terminology

#### 3.1 Definitions of Terms Specific to This Standard:

3.1.1 *deposits*—oxidative products laid down on the test area of the heater tube or caught in the test filter, or both.

3.1.1.1 *Discussion*—Fuel deposits will tend to predominate at the hottest portion of the heater tube, which is between the 30-mm and 50-mm position.

3.1.2 *heater tube*—an aluminum coupon controlled at elevated temperature, over which the test fuel is pumped.

3.1.2.1 *Discussion*—The tube is resistively heated and controlled in temperature by a thermocouple positioned inside. The critical test area is the thinner portion, 60 mm in length, between the shoulders of the tube. Fuel inlet to the tube is at the 0-mm position, and fuel exit is at 60 mm.

#### 3.2 Abbreviations:

3.2.1  $\Delta P$ —differential pressure.

### 4. Summary of Test Method

4.1 This test method for measuring the high temperature stability of gas turbine fuels uses the Jet Fuel Thermal Oxidation Tester (JFTOT) that subjects the test fuel to conditions that can be related to those occurring in gas turbine engine fuel systems. The fuel is pumped at a fixed volumetric flow rate through a heater, after which it enters a precision stainless steel filter where fuel degradation products may become trapped.

4.1.1 The apparatus uses 450 mL of test fuel ideally during a 2.5-h test. The essential data derived are the amount of deposits on an aluminum heater tube, and the rate of plugging of a 17  $\mu\text{m}$  nominal porosity precision filter located just downstream of the heater tube.

\*A Summary of Changes section appears at the end of this standard.

**TABLE 1 Models of JFTOT**

JFTOT Model	User Manual	Pressurize With	Pump Principle	Differential Pressure By
202	202/203 <sup>A</sup>	nitrogen	gear	Hg Manometer; No Record
203	202/203 <sup>A</sup>	nitrogen	gear	Manometer + Graphical Record
215	215 <sup>B</sup>	nitrogen	gear	Transducer + Printed Record
230	230/240 <sup>C</sup>	hydraulic	syringe	Transducer + Printout
240	230/240 <sup>C</sup>	hydraulic	syringe	Transducer + Printout

<sup>A</sup> Available from ASTM International Headquarters. Request RR:D02-1395.

<sup>B</sup> Available from ASTM International Headquarters. Request RR:D02-1396.

<sup>C</sup> Available from ASTM International Headquarters. Request RR:D02-1397.

## 5. Significance and Use

5.1 The test results are indicative of fuel performance during gas turbine operation and can be used to assess the level of deposits that form when liquid fuel contacts a heated surface that is at a specified temperature.

## 6. Apparatus

6.1 *Jet Fuel Thermal Oxidation Tester*<sup>A</sup> (JFTOT)—Five models of suitable equipment may be used as indicated in [Table 1](#).

6.1.1 Portions of this test may be automated. Refer to the appropriate user manual for the model JFTOT to be used for a description of detailed procedure. A manual is provided with each test rig, and the latest version of each manual is on file at ASTM as a Research Report.<sup>4</sup> (**Warning**—No attempt should be made to operate the JFTOT without first becoming acquainted with all components and the function of each.)

6.1.2 Certain operational parameters used with the JFTOT instrument are critically important to achieve consistent and correct results. These are listed in [Table 2](#).

6.2 *Heater Tube Deposit Rating Apparatus*:

6.2.1 *Visual Tube Rater*, the tuberator described in [Annex A1](#).

6.3 Because jet fuel thermal oxidation stability is defined only in terms of this test method, which depends upon, and is inseparable from, the specific equipment used, the test method shall be conducted with the equipment used to develop the test method or equivalent equipment.

## 7. Reagents and Materials

7.1 Use distilled (preferred) or deionized water in the spent sample reservoir as required for Model 230 and 240 JFTOTs.

7.2 Use methyl pentane, 2,2,4-trimethylpentane, or n-heptane (technical grade, 95 mol % minimum purity) as general cleaning solvent. This solvent will effectively clean internal metal surfaces of apparatus before a test, especially those surfaces (before the test section) that contact fresh sample. (**Warning**—Extremely flammable. Harmful if inhaled (see [Annex A3](#))).

7.2.1 Use trisolvant (equal mix of acetone (1), toluene (2), and isopropanol (3)) as a specific solvent to clean internal (working) surface of test section only. (**Warning**—(1) Extremely flammable, vapors may cause flash fire; (2) and (3) Flammable. Vapors of all three harmful. Irritating to skin, eyes, and mucous membranes.)

7.3 Use dry calcium sulfate + cobalt chloride granules (97 + 3 mix) in the aeration dryer. This granular material changes gradually from blue to pink color indicating absorption of water. (**Warning**—Do not inhale dust or ingest. May cause stomach disorder.)

## 8. Standard Operating Conditions

8.1 Standard conditions of the test method are as follows:

8.1.1 *Fuel Quantity*, 450-mL minimum for test + about 50 mL for system.

8.1.2 *Fuel Pre-Treatment*—Filtration through a single layer of general purpose, retentive, qualitative filter paper followed by a 6-min aeration at 1.5 L/min air flow rate for a maximum of 600 mL sample using a coarse 12-mm borosilicate glass gas dispersion tube.

8.1.3 *Fuel System Pressure*, 3.45 MPa (500 psi) ± 10 % gage.

8.1.4 *Thermocouple Position*, at 39 mm.

8.1.5 *Fuel System Prefilter Element*, filter paper of 0.45- $\mu$ m pore size.

8.1.6 *Heater Tube Control Temperature*, preset as specified in applicable specification.

8.1.7 *Fuel Flow Rate*, 2.7 to 3.3 mL/min, or 20 drops of fuel in 9.0 ± 1.0 s.

8.1.8 *Minimum Fuel Pumped During Test*, 405 mL.

8.1.9 *Test Duration*, 150 ± 2 min.

8.1.10 *Cooling Fluid Flow*, approximately 39 L/h, or center of green range on cooling fluid meter.

8.1.11 *Power Setting*, approximately 75 to 100 on non-computer models; internally set for computer models.

## 9. Preparation of Apparatus

9.1 *Cleaning and Assembly of Heater Test Section*:

9.1.1 Clean the inside surface of the heater test section using a nylon brush saturated with trisolvant material to remove all deposits.

9.1.2 Check the heater tube to be used in the test for surface defects and straightness by referring to the procedure in [Annex A1.10](#). Be careful, also, to avoid scratching tube shoulder during the examination, since the tube shoulder must be smooth to ensure a seal under the flow conditions of the test.

9.1.3 Assemble the heater section using new items: (1) visually checked heater tube, (2) test filter, and (3) three O-rings. Inspect insulators to be sure they are undamaged.

NOTE 1—Heater tubes must not be reused. Tests indicate that magnesium migrates to the heater tube surface under normal test conditions. Surface magnesium may reduce adhesion of deposits to reused heater tube.

9.1.4 During assembly of heater section, handle tube carefully so as not to touch center part of tube. IF CENTER OF HEATER TUBE IS TOUCHED, REJECT THE TUBE SINCE THE CONTAMINATED SURFACE MAY AFFECT THE DEPOSIT-FORMING CHARACTERISTICS OF THE TUBE.

<sup>4</sup> The following equipment (JFTOT) as described in [Table 1](#) and RR: D02-1395, RR: D02-1396, and RR: D02-1397, was used to develop this test method, as provided by Alcor Petroleum Instruments, 919 Isom, San Antonio, TX 78216. This is not an endorsement or certification by ASTM International.

TABLE 2 Critical Operating Characteristics of JFTOT Instruments

Item	Definition		
Test apparatus	tube-in-shell heat exchanger as illustrated in Fig. 1.		
Test coupons			
Heater tube <sup>A,B</sup>	<p>specialty fabricated aluminum tube that produces controlled heated test surface; new one for each test</p> <p>Each JFTOT tube may be physically identified with a unique serial number, identifying the manufacturer and providing traceability to the original material batch</p> <p>6061-T6 Aluminum, plus the following criteria</p> <p>a) The Mg:Si ratio shall not exceed 1.9:1</p> <p>b) The Mg<sub>2</sub>Si percentage shall not exceed 1.85 %</p>		
Tube identification			
Tube metallurgy			
Tube dimensions	Dimension		Tolerance
Tube length, mm	161.925		±0.254
Center section length, mm	60.325		±0.051
Outside diameters, mm			
Shoulders	4.699		±0.025
Center section	3.175		±0.051
Inside diameter, mm	1.651		±0.051
Total indicator runout, mm, max	0.013		
Mechanical surface finish, nm, max	50		
Test filter <sup>4</sup>	nominal 17-µm stainless steel mesh filter element to trap deposits; new one for each test		
Instrument parameters			
Sample volume	600 mL of sample is aerated, then this aerated fuel is used to fill the reservoir leaving space for the piston; 450 ± 45 mL may be pumped in a valid test		
Aeration rate	1.5 L/min dry air through sparger		
Flow during test	3.0 ± 10 % mL/min (2.7 min to 3.3 max)		
Pump mechanism	positive displacement, gear or piston syringe		
Cooling	bus bars fluid cooled to maintain consistent tube temperature profile		
Thermocouple (TC)	Type J, fiber braid or Iconel sheathed		
Operating pressure			
System	3.45 MPa ± 10 % on sample by pressurized inert gas (nitrogen) or by hydraulically transmitted force against control valve outlet restriction		
At test filter	differential pressure (ΔP) measured across test filter (by mercury manometer or by electronic transducer) in mm Hg		
Operating temperature			
For test	as stated in specification for fuel		
Uniformity of run	maximum deviation of ±2°C from specified temperature		
Calibration	pure tin at 232°C (and for Models 230 and 240 only, pure lead at 327°C for high point and ice + water for low point reference)		

<sup>A</sup> The following equipment, heater tubes, manufactured by Alcor Petroleum Instruments, 919 Isom, San Antonio, TX 78216, was used in the development of this test method. This is not an endorsement or certification by ASTM International.

<sup>B</sup> A test protocol to establish equivalence of heater tubes is on file at ASTM International Headquarters and may be obtained by requesting Research Report RR: D02-1550.

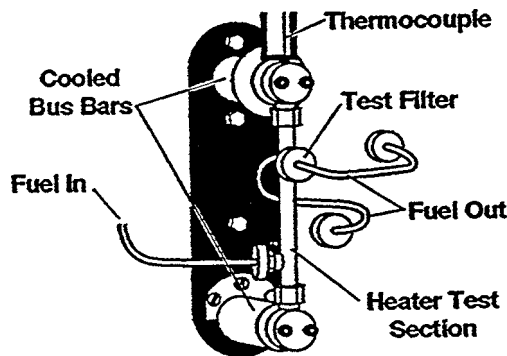


FIG. 1 Standard Heater Section, Essential to All JFTOT Instruments

NOTE 2—It is assumed that the apparatus has been disassembled from previous test (see Annex A2 or appropriate user manual for assembly/disassembly details).

9.2.2 Inspect and clean components that contact test sample and replace any seals that are faulty or suspect especially the (1) lip seal on piston, and (2) O-rings on the reservoir cover, lines, and prefilter cover.

9.2.3 Install prepared heater section (as described in 9.1.1-9.1.4).

9.2.4 Assemble pre-filter with new element and install.

9.2.5 Check thermocouple for correct reference position, then lower into standard operating position.

9.2.6 On Models 230 and 240, make sure the water beaker is empty.

## 10. Calibration and Standardization Procedure

10.1 Perform checks of key components at the frequency indicated in the following (see Annexes or user manual for details).

## 9.2 Cleaning and Assembly of Remainder of Test Components:

9.2.1 Perform the following steps in the order shown prior to running a subsequent test.

10.1.1 *Thermocouple*—Calibrate a thermocouple when first installed and then normally every 30 to 50 tests thereafter, but at least every 6 months (see A2.2.8).

10.1.2 *Differential Pressure Cell*—Standardize once a year or when installing a new cell (see A2.2.6).

10.1.3 *Aeration Dryer*—Check at least monthly and change if color indicates significant absorption of water (see 7.3).

10.1.4 *Metering Pump*—Perform two checks of flow rate for each test as described in Section 11.

10.1.5 *Filter Bypass Valve*—For Models 202, 203, and 215, check for leakage at least once a year (see X1.5).

## 11. Procedure

### 11.1 Preparation of Fuel Test Sample:

11.1.1 Filter and aerate sample using standard operating conditions (see A2.2.9). (**Warning**—All jet fuels must be considered flammable except JP5 and JP7. Vapors are harmful (see A3.3, A3.6, and A3.7)).

NOTE 3—Before operating see **Warning** in 6.1.1.

NOTE 4—Test method results are known to be sensitive to trace contamination from sampling containers. For recommended containers, refer to Practice D 4306.

11.1.2 Maintain temperature of sample between 15°C and 32°C during aeration. Put reservoir containing sample into hot or cold water bath to change temperature, if necessary.

11.1.3 Allow no more than 1 h to elapse between the end of aeration and the start of the heating of the sample.

### 11.2 Final Assembly:

11.2.1 Assemble the reservoir section (see User Manual).

11.2.2 Install reservoir and connect lines appropriate to the model JFTOT being used (see User Manual).

11.2.3 Remove protective cap and connect fuel outlet line to heater section. Do this quickly to minimize loss of fuel.

11.2.4 Check all lines to ensure tightness.

11.2.5 Recheck thermocouple position at 39 mm.

11.2.6 Make sure drip receiver is empty (Models 230 and 240 only).

### 11.3 Power Up and Pressurization:

11.3.1 Turn POWER to ON.

11.3.2 Energize the  $\Delta P$  alarms on models with manual alarm switch (Models 202, 203, and 215).

11.3.3 Pressurize the system slowly to about 3.45 MPa as directed in the User Manuals for Models 202, 203, and 215 (see also A2.2.5).

11.3.4 Inspect the system for leaks. Depressurize the system as necessary to tighten any leaking fittings.

11.3.5 Set controls to the standard operating conditions.

11.3.6 Use a heater tube control temperature as specified for the fuel being tested. Apply any thermocouple correction from the most recent calibration (see A2.2.8).

NOTE 5—The JFTOT can be run to a maximum tube temperature of about 350°C. The temperature at which the test should be run and the criteria for judging results are normally embodied in fuel specifications.

### 11.4 Start Up:

11.4.1 Use procedure for each model as described in the appropriate User Manual.

11.4.2 Some JFTOT models may do the following steps automatically, but verify that:

11.4.2.1 No more than 1 h maximum elapses from aeration to start of heating.

11.4.2.2 The manometer bypass valve is closed as soon as the heater tube temperature reaches the test level, so fuel flows through the test filter (see A2.2.6).

11.4.2.3 Manometer is set to zero (see A2.2.6).

11.4.3 Check fuel flow rate against Standard Operating Conditions by timing flow or counting the drip rate during first 15 min of test.

NOTE 6—When counting drop rate, the first drop is counted as drop 0, and time is started. As drop 20 falls, total time is noted.

### 11.5 Test:

11.5.1 Record filter pressure drop every 30 min minimum during the test period.

11.5.2 If the filter pressure drop begins to rise sharply and it is desired to run a full 150-min test, a bypass valve common to all models must be opened in order to finish the test. See appropriate User Manual for details on operation of the bypass system (see A2.2.2).

11.5.3 Make another flow check within final 15 min before shutdown (see 11.4.3 and accompanying note).

11.6 *Heater Tube Profile*—If a heater tube temperature profile is desired, obtain as described in X1.4.

### 11.7 Shutdown:

11.7.1 For Models 202, 203, and 215 only:

11.7.1.1 Switch HEATER, then PUMP to OFF.

11.7.1.2 Close NITROGEN PRESSURE VALVE and open MANUAL BYPASS VALVE.

11.7.1.3 Open NITROGEN BLEED VALVE slowly, if used, to allow system pressure to decrease at an approximate rate of 0.15 MPa/s.

11.7.2 Models 230 and 240 shut down automatically.

11.7.2.1 After shutdown, turn FLOW SELECTOR VALVE to VENT to relieve pressure.

11.7.2.2 Piston actuator will retreat automatically.

11.7.2.3 Measure effluent in drip receiver, then empty.

### 11.8 Disassembly:

11.8.1 Disconnect fuel inlet line to the heater section and cap to prevent fuel leakage from reservoir.

11.8.2 Disconnect heater section.

11.8.2.1 Remove heater tube from heater section carefully so as to avoid touching center part of tube, and discard test filter.

11.8.2.2 Flush tube with recommended general cleaning solvent (see 7.2) from top down. If the tube is grasped from the top, do not wash solvent over gloves or bare fingers. Allow to dry, return tube to original container, mark with identification and hold for evaluation.

11.8.3 Disconnect reservoir.

11.8.3.1 Measure the amount of spent fluid pumped during the test, and reject the test if the amount is less than 405 mL.

11.8.3.2 Discard fuel to waste disposal.

## 12. Heater Tube Evaluation

12.1 Visually rate the deposits on heater tube in accordance with Annex A1.

12.2 Return tube to original container, record data, and retain tube for visual record as appropriate.

### 13. Report

13.1 Report the following information:

13.1.1 The heater tube control temperature. This is the test temperature of the fuel.

13.1.2 Heater tube deposit rating(s).

13.1.3 Maximum pressure drop across the filter during the test or the time required to reach a pressure differential of 25 mm Hg. For the Model 202, 203 JFTOT, report the maximum recorded  $\Delta P$  found during the test.

13.1.4 If the normal 150-min test time was not completed, for example, if the test is terminated because of pressure drop failure, also report the test time that corresponds to this heater tube deposit rating.

NOTE 7—Either the tube rating or the  $\Delta P$  criteria, or both, are used to determine whether a fuel sample passes or fails the test at a specified test temperature.

13.1.5 Spent fuel at the end of a normal test. This will be the amount on top of floating piston or total fluid in displaced water beaker, depending on model of JFTOT used.

13.1.6 Heater tube serial number may be reported.

### 14. Precision and Bias

14.1 An interlaboratory study of JFTOT testing was conducted in accordance with Practice E 691 by eleven laboratories, using thirteen instruments including two JFTOT models with five fuels at two temperatures for a total of ten materials. Each laboratory obtained two results from each material.<sup>5</sup>

14.1.1 The terms repeatability and reproducibility in this section are used as specified in Practice E 177.

14.2 *Precision*—It is not possible to specify the precision of this test method because it has been determined that test method results cannot be analyzed by standard statistical methodology.

14.3 *Bias*—This test method has no bias because jet fuel thermal oxidative stability is defined only in terms of this test method.

### 15. Keywords

15.1 differential pressure; fuel decomposition; oxidative deposits; test filter deposits; thermal stability; turbine fuel

<sup>5</sup> Supporting data have been filed at ASTM International Headquarters and may be obtained by requesting Research Report RR: D02-1309.

## ANNEXES

(Mandatory Information)

### A1. TEST METHOD FOR VISUAL RATING OF JFTOT HEATER TUBES

#### A1.1 Scope

A1.1.1 This method covers a procedure for visually rating the heater tube produced by Test Method D 3241, JFTOT Procedure.

A1.1.2 The final result from this test method is a tube color rating based on an arbitrary scale established for this test method plus two additional yes/no criteria that indicate the presence of an apparent large excess of deposit or an unusual deposit, or both.

#### A1.2 Referenced Documents

A1.2.1 *Adjunct*:<sup>3</sup>

Color Standard for Tube Deposit Rating

#### A1.3 Terminology

A1.3.1 *abnormal*—a tube deposit color that is neither peacock nor like those of the Color Standard.

A1.3.1.1 *Discussion*—This refers to deposit colors such as blues and grays that do not match the Color Standard.

A1.3.2 *peacock*—A multicolor, rainbow-like tube deposit.

A1.3.2.1 *Discussion*—This type of deposit is caused by interference phenomena where deposit thickness exceeds the quarter wave length of visible light.

A1.3.3 *Tube Rating*—A ten-step discrete scale from 0 to >4 with intermediate levels for each number starting with 1 described as less than the subsequent number.

A1.3.3.1 *Discussion*—The scale is taken from the five colors—0, 1, 2, 3, 4—on the ASTM Color Standard. The

complete scale is: 0, <1, 1, <2, 2, <3, 3, <4, 4, >4. Each step is not necessarily of the same absolute magnitude. The higher the number, the darker the deposit rating.

#### A1.4 Summary of Test Method

A1.4.1 This test method uses a specially constructed light box to view the heater tube. The tube is positioned in the box using a special tube holder. Uniformity of the new tube surface is judged under the optimum light conditions of the box. Color of the tube is judged under light and magnification by comparing to the Color Standard plate slid into optimum position immediately behind the tube.

#### A1.5 Significance and Use

A1.5.1 The final tube rating is assumed to be an estimate of condition of the degraded fuel deposit on the tube. This rating is one basis for judging the thermal oxidative stability of the fuel sample.

#### A1.6 Apparatus

A1.6.1 *Heater Tube Deposit Rating Apparatus*—The colors of deposits on the heater tube are rated by using a tuberator and the ASTM Color Standard.

#### A1.7 Test Samples (Coupons)

A1.7.1 Handle the heater tube coupon carefully so as not to touch the center portion at any time.

NOTE A1.1—Touching the center of the coupon will likely contaminate or disturb the surface of the tube, deposit, or both, which must be evaluated in pristine condition.

**A1.8 Standard Operating Conditions**

- A1.8.1 *Inside of Light Box*, opaque black.
- A1.8.2 *Light Source*, three 30 W incandescent bulbs, reflective type; all must be working for optimum viewing.
- A1.8.3 *Bulb Positions*, one above, two below, each directed toward tube holder and color standard.
- A1.8.4 *Magnification*, 2×, covering viewing window.
- A1.8.5 *Evaluators*—Use persons who can judge colors, that is, they should not be color blind.

**A1.9 Calibration and Standardization**

A1.9.1 No standardization is required for this test apparatus, but since the Color Standard is known to fade, store it in a dark place.

NOTE A1.2—The lifetime of the Color Standard is not established when continuously or intermittently exposed to light. It is good practice to keep a separate Standard in dark (no light) storage for periodic comparison with the Standard in regular use. When comparing, the optimum under the light conditions are those of the tube rating box.

- A1.9.2 *Standardization of Rating Technique:*
  - A1.9.2.1 In rating a tube, the darkest deposits are most important. Estimate grades for the darkest uniform deposit, not for the overall average color of the deposit area.
  - A1.9.2.2 When grading, consider only the darkest continuous color that covers an area equal or larger than a circle of size one-half the diameter of the tube.
  - A1.9.2.3 Ignore a deposit streak that is less in width than one-quarter the diameter of the tube regardless of the length of the streak.
  - A1.9.2.4 Ignore spots, streaks, or scratches on a tube that are considered tube defects. These will normally not be present, since the tube is examined before use to eliminate defective tubes.

**A1.10 Pretest Rating of Tubes**

A1.10.1 Examine the tube without magnification in laboratory light. If a defect is visible, discard the tube. Then examine the center (thinner area) of the tube between 5 and 55 mm above the bottom shoulder using the Tuberator. If a defect is seen, establish its size. If it is larger than 2.5 mm<sup>2</sup>, discard the tube. Fig. A1.1 provides an illustration of defect areas equivalent to 2.5 mm<sup>2</sup>.

A1.10.2 Examine the tube for straightness by rolling the tube on a flat surface and noting the gap between the flat surface and the center section. Reject any bent tube.

**A1.11 Procedure**

- A1.11.1 *Set Up:*
  - A1.11.1.1 Snap the upper end of the heater tube into the clamp of the holder for the heater tube.
  - A1.11.1.2 Push the heater tube against the stop of the holder for the heater tube.
  - A1.11.1.3 Slide the holder with the heater tube over the guide rod into the tuberator.

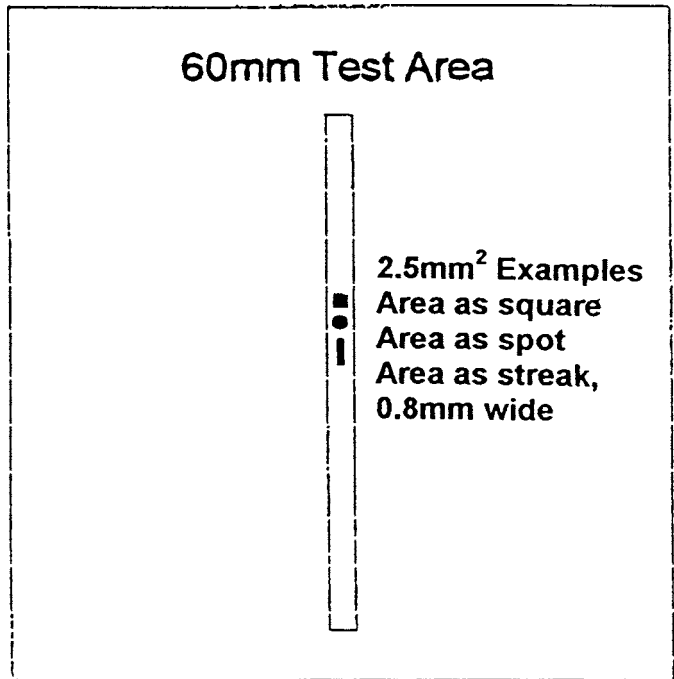


FIG. A1.1 Defect Areas

A1.11.1.4 Rotate the holder and position the heater tube such that the side with the darkest deposit is visible.

A1.11.1.5 Insert the ASTM Color Standard into the tuberator.

A1.11.2 *Evaluation:*

A1.11.2.1 On completion of the test, compare the darkest heater tube deposit color, between 5 and 55 mm above the bottom shoulder, with the ASTM Color Standard. Only rate a deposit if the area is greater than 2.5 mm<sup>2</sup> and the width of any streak or spot is greater than 0.8 mm. Fig. A1.1 provides an illustration of spots or streaks with an area equivalent to 2.5 mm<sup>2</sup>.

A1.11.2.2 When the darkest deposit color corresponds to a color standard, that number should be recorded.

A1.11.2.3 If the darkest heater tube deposit color being rated is in the obvious transition state between any two adjacent color standards, the rating should be recorded as less than the darker (that is, higher number) standard.

A1.11.2.4 In the event the heater tube has deposits which do not match the normal Color Standard colors, use the following rules for rating. With reference to standard terms:

- (1) If the deposit is peacock color, rate this as Code P, but also rate any deposit that shows normal deposit color; or
- (2) If the deposit contains an abnormal color, rate this as Code A, but also rate any deposit that shows normal deposit color.

A1.11.3 Remove the rated heater tube and return to its original container.

**A1.12 Report**

A1.12.1 Report the numerical rating for the heater tube plus A or P, or both, with additional description, if applicable.