
Stationary training equipment —

Part 2:

**Strength training equipment, additional
specific safety requirements and test
methods**

iTeh STANDARD PREVIEW

Équipement d'entraînement fixe —

(standards.iteh.ai)

*Partie 2. Équipement d'entraînement de force, exigences spécifiques de
sécurité et méthodes d'essai supplémentaires*

ISO 20957-2:2005

<https://standards.iteh.ai/catalog/standards/sist/5cf48552-2eea-4136-8aae-d2b537ed83d1/iso-20957-2-2005>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 20957-2:2005](https://standards.iteh.ai/catalog/standards/sist/5c48552-2eea-4136-8aae-d2b537ed83d1/iso-20957-2-2005)

<https://standards.iteh.ai/catalog/standards/sist/5c48552-2eea-4136-8aae-d2b537ed83d1/iso-20957-2-2005>

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Classification	1
5 Safety requirements	1
5.1 General	1
5.2 Loading	2
5.3 Endurance load	3
5.4 Stacked weights	3
5.5 Weight discs	6
5.6 Minimum achievable training loads	6
6 Test methods	8
6.1 General	8
6.2 Testing of intrinsic loading	8
6.3 Testing of extrinsic loading	8
6.4 Testing of the weight discs support	8
6.5 Testing of endurance load	9
6.6 Test report	9
7 Additional instructions for use	9
8 Additional exercise instructions	10

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20957-2 was prepared by Technical Committee ISO/TC 83, *Sports and recreational equipment*.

ISO 20957 consists of the following parts, under the general title *Stationary training equipment*:

- *Part 1: General safety requirements and test methods*
- *Part 2: Strength training equipment, additional specific safety requirements and test methods*
- *Part 4: Strength training benches, additional specific safety requirements and test methods*
- *Part 5: Pedal crank training equipment, additional specific safety requirements and test methods*
- *Part 6: Treadmills, additional specific safety requirements and test methods*
- *Part 7: Rowing machines, additional specific safety requirements and test methods*
- *Part 8: Steppers, stairclimbers and climbers — Additional specific safety requirements and test methods*
- *Part 9: Elliptical trainers, additional specific safety requirements and test methods*

Stationary training equipment —

Part 2:

Strength training equipment, additional specific safety requirements and test methods

1 Scope

This part of ISO 20957 specifies additional safety requirements for strength training equipment in addition to the general safety requirements of ISO 20957-1.

This part of ISO 20957 is applicable to stationary training equipment type strength training equipment with stack weight resistance or other means of resistance like weight discs, elastic cords, hydraulic, pneumatic and magnetic systems and springs (type 2) (hereinafter referred to as training equipment) with the classes S and H.

Any attachments provided with the training equipment for the performance of additional exercises are subject to the requirements of ISO 20957-1.

THIS STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

ISO 20957-2:2005

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

<https://standards.iteh.ai/catalog/standards/sist/5cf48552-2eea-4136-8aae-426c3fede0d7/iso-20957-2-2005>

ISO 20957-1:2005, *Stationary training equipment — Part 1: General safety requirements and test methods*

EN 294, *Safety of machinery — Safety distance to prevent danger zones being reached by the upper limbs*

3 Terms and definitions

For the purposes of this document the terms and definitions given in ISO 20957-1 apply.

4 Classification

Clause 4 of ISO 20957-1:2005 applies.

5 Safety requirements

5.1 General

Depending on the design of the piece of training equipment the following requirements shall apply as appropriate.

5.2 Loading

5.2.1 Intrinsic loading

Each piece of equipment loaded with the user's body mass shall withstand a force F :

- for class H $2,5 \times$ the body mass (100 kg) without breakage;
- for class S $2 \times$ the body mass (100 kg) without permanent deformation.

When tested according to 6.2, supports (e.g. load-bearing surfaces) shall not be deformed by more than $f = 1/100$, cantilever supports (cantilever surfaces) by more than $f = 1/150$ and other dimensions by more than 1 %. The training equipment shall not break when a static load of $4 \times$ the body mass is applied.

5.2.2 Extrinsic loading

5.2.2.1 Class H

When tested according to 6.3 and loaded with the user's body mass and/or reaction forces or moments of the user, each piece of equipment shall withstand, without breakage, a load, F in newtons according to Equation (1):

$$F = [G_k + 1,5 G] \times 2,5 \times 9,81 \quad (1)$$

where:

G is the maximum load in kilograms indicated by the manufacturer (see 6.8 of ISO 20957-1:2005);

G_k is the force in kilograms determined by the proportional body mass (100 kg);

1,5 is the dynamic coefficient;

2,5 is the safety coefficient.

5.2.2.2 Class S

When tested according to 6.3 and loaded with the user's body mass and/or reaction forces or moments of the user, each piece of equipment shall withstand a load F according to Equation (2):

$$F = [G_k + 1,5 G] \times 2 \times 9,81 \quad (2)$$

where:

G is the maximum load in kilograms indicated by the manufacturer (see 6.8 of ISO 20957-1:2005). The torques as specified in Table 1 are to be taken as basis for the calculation of G , if greater than the manufacturer's stated maximum load;

G_k is the force in kilograms determined by the proportional body mass (100 kg);

1,5 is the dynamic coefficient;

2 is the safety coefficient.

After the test, supports (load bearing surfaces) shall not be deformed by more than $f = 1/100$, cantilever supports (cantilever surfaces) by not more than $f = 1/150$ and other dimensions by not more than 1 %.

If greater than manufacturer's maximum stated load, the equipment shall be capable of accepting a minimal torque load as specified in Table 1, throughout the range of movement of each exercise for which the equipment is designed. The training equipment shall not break when a static load according to Equation (2) with a safety coefficient of 4 is applied.

5.3 Endurance load

When tested according to 6.4, the training equipment shall be capable of normal functioning.

When the training equipment consists of two or more separate functional units, each shall withstand the endurance load test.

When more than one function is tested, which involve use of common components e.g.: ropes, pulleys and bearings, these can be replaced before each separate test.

5.4 Stacked weights

5.4.1 Access to squeeze and/or shear points

5.4.1.1 General

The uncontrolled access by third parties to squeeze and/or shear points of stacked weights shall be prevented.

Weights that can only be lifted as a whole block shall not come closer than 60 mm during movement to any part of the equipment or the ground.

[ISO 20957-2:2005](https://standards.iteh.ai/catalog/standards/sist/5c48552-2eea-4136-8aae-d2b537ed83d1/iso-20957-2-2005)

5.4.1.2 Class H <https://standards.iteh.ai/catalog/standards/sist/5c48552-2eea-4136-8aae-d2b537ed83d1/iso-20957-2-2005>

This can be achieved by either:

- a) surrounding by a casing in conformance with EN 294 with the exception of a maximum 75 mm wide gap for setting of the weights;

or

- b) by locking the machine to prevent moving of the stacked weights when the equipment is not in use and by utilizing the training area to deny access to third parties [see 3.2 and 9 c) of ISO 20957-1:2005].


5.4.1.3 Class S

5.4.1.3.1 Encasing

Where stacked weights are behind the user in the normal exercise position as described in the user's manual (see Figure 1, vertical plane AB) they shall be encased on all sides except one side where a gap of 75 mm maximum is allowed for selection of the weights. Stacked weights that are encased shall fulfill the following requirement:

- up to 1 800 mm the encasing shall be at least 60 mm higher than the upper edge of the block of weights in its highest position.

Dimensions in millimeters

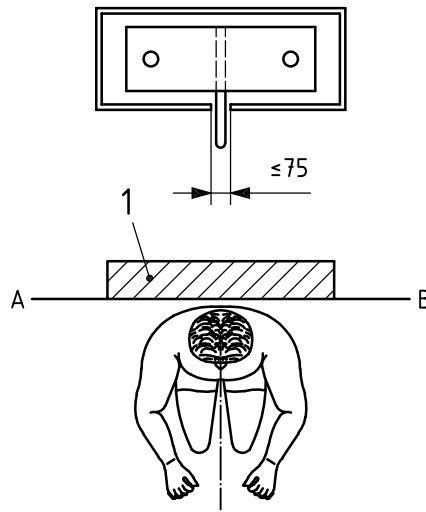

Key

- 1 head, chest or back support

Figure 1 — Weight stack behind the user


Where the whole of the stacked weights are at the side of the user and in front of AB (see Figure 2) they shall be encased on the 3 sides furthest from the user. Test in accordance with 6.1.1. Selection of the weights shall be from the open side.

(standards.itech.ai)

If any part of the weight stack projects behind AB (see Figure 3) it shall be encased on all sides. AB is the line drawn laterally from the head, chest or back support in its most onerous position. If there is no support the line is drawn laterally from the most onerous user position.

<https://standards.itech.ai/catalog/standards/sist/5c48552-2eea-4136-8aac-d2b537ed83d1/iso-20957-2-2005>

Dimensions in millimeters

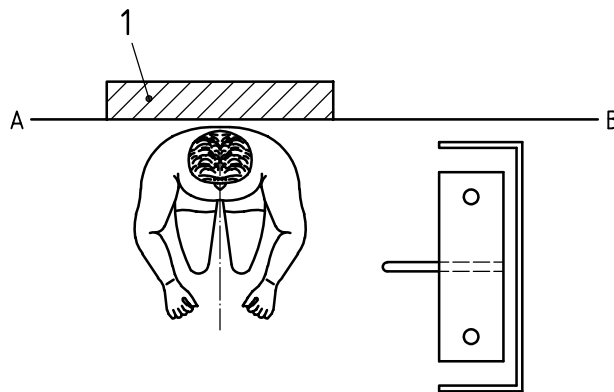


Key

- 1 head, chest or back support

Figure 2 — Weight stack in front of AB

Dimensions in millimeters

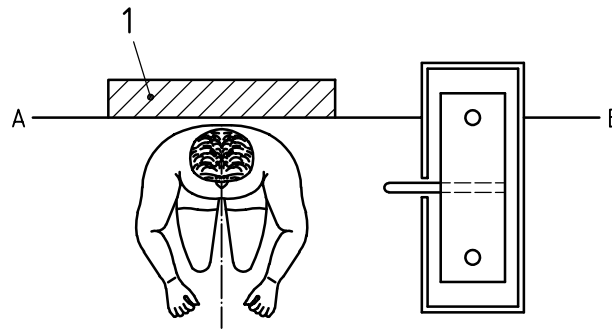

Key

1 head, chest or back support

Figure 3 — Weight stack behind AB


Multiweight stack machines do not require guarding on the 3 sides furthest from the user provided there is a framework on these sides which prevents uncontrolled access by third parties. On the side adjacent to the user the requirements apply as in 5.4.1.2.

5.4.1.3.2 No encasing

Where the stacked weights are always in front of the user and visible throughout the exercise without any important obstruction (see Figure 4), weights need not be encased.

NOTE Encasing is not necessary because the negative forces exceed the positive forces and thus the user can always interrupt the movement of the stacked weights if a third party unintentionally enters the area of the stacked weights.

<https://standards.iteh.ai/catalog/standards/sist/5cf48552-2eea-4136-8aac-d2b537ed83d1/iso-20957-2-2005>

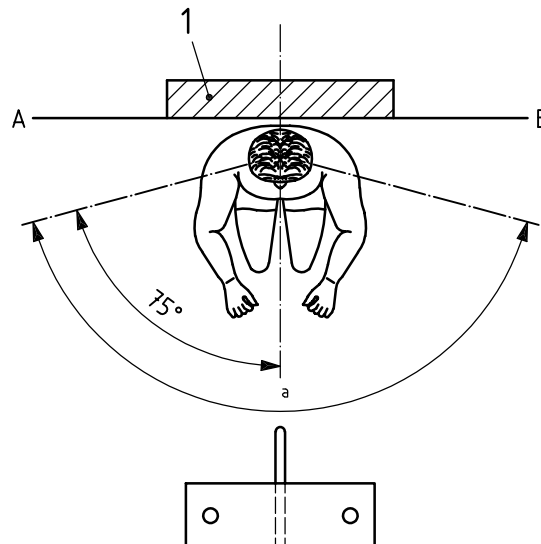

Key

1 head, chest or back support

^a Field of vision.

Figure 4 — Weight stack in front of the user