

---

---

**Powered ride-on turf care equipment —  
Roll-over protective structures (ROPS) —  
Test procedures and acceptance criteria**

*Équipement automoteur à conducteur porté pour l'entretien du gazon —  
Structures de protection contre le retournement (ROPS) — Modes  
opératoires d'essai et critères d'acceptation*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 21299:2009

<https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7fb28c7be525/iso-21299-2009>



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 21299:2009

<https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7fb28c7be525/iso-21299-2009>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

Foreword.....	iv
Introduction .....	v
<b>1</b> <b>Scope</b> .....	<b>1</b>
<b>2</b> <b>Normative references</b> .....	<b>1</b>
<b>3</b> <b>Terms, definitions and symbols</b> .....	<b>1</b>
<b>4</b> <b>Test apparatus and equipment</b> .....	<b>3</b>
4.1 <b>Test equipment for horizontal loading</b> .....	<b>3</b>
4.2 <b>Test equipment for vertical crush loading</b> .....	<b>3</b>
4.3 <b>Other measuring apparatus</b> .....	<b>3</b>
<b>5</b> <b>Preparation for strength testing</b> .....	<b>4</b>
5.1 <b>Purpose</b> .....	<b>4</b>
5.2 <b>Preparation rules for governing testing</b> .....	<b>4</b>
<b>6</b> <b>Test procedures</b> .....	<b>4</b>
6.1 <b>Test sequence</b> .....	<b>4</b>
6.2 <b>Horizontal loading</b> .....	<b>5</b>
6.3 <b>Vertical crushing test</b> .....	<b>9</b>
6.4 <b>Observations during testing</b> .....	<b>10</b>
<b>7</b> <b>Deflection-limiting volume (DLV)</b> .....	<b>10</b>
<b>8</b> <b>Tolerances</b> .....	<b>12</b>
<b>9</b> <b>Acceptance conditions</b> .....	<b>12</b>
9.1 <b>General requirements</b> .....	<b>12</b>
9.2 <b>Deflection-limiting volume/ground plane</b> .....	<b>12</b>
9.3 <b>Horizontal overload test for energy-absorbing ROPS</b> .....	<b>13</b>
9.4 <b>Vertical crush overload test</b> .....	<b>14</b>
9.5 <b>Cold weather embrittlement</b> .....	<b>14</b>
<b>10</b> <b>Extension to other machines</b> .....	<b>16</b>
<b>11</b> <b>Labelling</b> .....	<b>16</b>
<b>12</b> <b>Test report</b> .....	<b>16</b>
<b>Annex A</b> (normative) <b>Requirements for providing resistance to brittle fracture of ROPS at reduced operating temperature</b> .....	<b>17</b>
<b>Annex B</b> (informative) <b>ROPS standards judged to provide operator protection comparable to this International Standard</b> .....	<b>19</b>
<b>Annex C</b> (informative) <b>Test report for roll-over protective structure</b> .....	<b>20</b>
<b>Bibliography</b> .....	<b>22</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 21299 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 13, *Powered lawn and garden equipment*.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 21299:2009

<https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7fb28c7be525/iso-21299-2009>

## Introduction

The testing of protective structures on machines is aimed at minimizing the frequency and severity of operator crushing injury resulting from accidental overturning during operation.

This International Standard enables a machine's roll-over protective structure (ROPS) to be tested by the application of static loads that simulate the actual loads which can be imposed on the cab or frame when the machine overturns without free-fall. Observations can be made on the strength of the structure, the brackets attaching it to the machine and those machine parts that could be affected by the load imposed on the structure.

Clause 6 contains testing alternatives for energy-absorbing and rigid ROPS. Field overturn experiences have demonstrated that when conservative, conventional ROPS design and test strategies are applied to small, low-mass vehicles, there is frequently little or no permanent deformation to the ROPS when the small vehicle overturns. Furthermore, standard structural steel shapes are not always incrementally sized to accommodate an efficient design for low-mass vehicles. Consequently, there is opportunity to more efficiently design and apply ROPS to small vehicles by the utilization of a rigid, non-energy-absorbing design.

Until now, there has been no ROPS International Standard covering the field of application of powered ride-on turf care machinery, and it was therefore necessary for the industry to employ standards from other fields of application to test this type of machinery. For information, Annex B lists those standards which have been employed in the past to determine the performance of ROPS for powered ride-on turf care machinery and which have been judged to provide operator protection comparable to that specified in this International Standard.

[ISO 21299:2009](https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7fb28c7be525/iso-21299-2009)

<https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7fb28c7be525/iso-21299-2009>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 21299:2009

<https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7fb28c7be525/iso-21299-2009>

# Powered ride-on turf care equipment — Roll-over protective structures (ROPS) — Test procedures and acceptance criteria

## 1 Scope

This International Standard defines test procedures and acceptance criteria for the roll-over protective structures (ROPS) of powered ride-on turf care machinery with a mass of 3 000 kg or less.

It is not applicable to stand-on or sulky type machines, nor to self-propelled machinery and tractors used in agriculture, forestry or construction applications.

NOTE Product-specific standards such as ISO 5395 specify whether or not a certain type of machine is to be fitted with a ROPS and these can include additional information on aspects related to ROPS, e.g. seat-belt anchorages and seat belts.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5353, *Earth-moving machinery, and tractors and machinery for agriculture and forestry — Seat index point*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread*<sup>1)</sup>

ISO 898-2, *Mechanical properties of fasteners — Part 2: Nuts with specified proof load values — Coarse thread*

ASTM A370, *Standard test methods and definitions for mechanical testing of steel products*

## 3 Terms, definitions and symbols

For the purposes of this document, the following terms, definitions and symbols (see Table 1) apply.

### 3.1 attachment

device designed for mounting only on a specific machine to perform a specific task

### 3.2 horizontal loading test

application of a horizontal load to the rear, front and sides of a ROPS

---

1) To be published. (Revision of ISO 898-1:1999)

**3.3 machine mass**

mass of the machine in working order, not including the operator, with all fluid levels full and with ROPS

NOTE The machine mass includes the heaviest configuration of attachments.

**3.4 reference mass**

$m_t$   
mass, not less than the machine mass, used by the manufacturer to calculate the loading energies and forces to be applied in the tests

NOTE Adapted from ISO 5700:2006, definition 3.3.

**3.5 reference plane**

vertical plane generally longitudinal to the machine and passing through the seat index point (SIP) as defined in ISO 5353

**3.6 roll-over protective structure  
ROPS**

framework protecting operators of turf care machinery that minimizes the likelihood of crushing injury resulting from accidental overturning during operation

NOTE 1 The ROPS is characterized by the provision of space for a deflection-limiting volume, either inside the envelope of the structure or within a space bounded by a series of planes from the outer edges of the structure to any part of the machine that might come into contact with flat ground; the structure is capable of supporting the mass of the machine in the overturned position.

NOTE 2 A ROPS may be designed and tested as a rigid ROPS or an energy-absorbing ROPS. A rigid ROPS, like an energy-absorbing ROPS, must be geometrically designed to protect the prescribed deflection-limiting volume. The primary difference is the static force resistance requirements in lieu of energy absorbing horizontal loads.

NOTE 3 The ROPS may be front- or rear-mounted, fixed or foldable (e.g. hinged or telescoping).

NOTE 4 Adapted from ISO 5700:2006, definition 3.1.

**3.7 turf care machinery**

machines used in the care and maintenance of predominately grassy areas, including golf courses, sports fields and lawns

**3.8 vertical crushing test**

application of a vertical load through a beam placed laterally across the uppermost members of the ROPS

**Table 1 — Symbols**

Symbol	Description	Unit
$D$	Deflection of the ROPS at the point of, and in line with, the load application	mm
$E_{ll}$	Energy input to be absorbed during longitudinal loading	J
$E_{is}$	Energy input to be absorbed during side loading	J
$F$	Static load force	N
$F_{max}$	Maximum static load force occurring during loading with the exception of the overload	N
$F_v$	Vertical crush load force	N
$L$	Length of forward projection of ROPS	mm
$m_t$	Reference mass	kg
$W$	External width of ROPS	mm



## 4 Test apparatus and equipment

### 4.1 Test equipment for horizontal loading

#### 4.1.1 General

The test equipment shall enable horizontal loading to be applied to the ROPS. Provision shall be made for the load to be uniformly distributed in the direction of loading and along a beam having a maximum length of 700 mm. This stiff beam shall have a maximum vertical face dimension of 150 mm. The edges of the beam in contact with the ROPS shall be rounded, with a maximum radius of 50 mm.

The beam shall be capable of being adjusted to any angle in relation to the load direction, in order for it to be able to follow the angular variations of the ROPS load-bearing surface as it deflects.

Universal joints, or equivalent, shall be incorporated to ensure that the loading device does not constrain the structure in rotation or translation in any direction other than the loading direction.

The deviation in direction of the force shall not exceed

- $\pm 2^\circ$  at the start of the test under zero load, and
- $10^\circ$  above or  $20^\circ$  below horizontal during testing under load.

The deflection rate shall be slow ( $< 5$  mm/s) so that the load can at all times be considered “static”.

#### 4.1.2 Apparatus for measuring energy absorbed by the ROPS

The force vs. deflection curve shall be plotted continuously in order to determine the energy absorbed by the ROPS. Measurement of the force and deflection at the point where the load is applied to the ROPS is not required; however, force and deflection shall be measured simultaneously and co-linearly.

The point of origin of deflection measurements shall be selected so that only the energy absorbed by the ROPS or the deflection of certain parts of the machine, or both, is measured. The energy absorbed by deflection or slipping of the anchoring, or both, shall not be included.

### 4.2 Test equipment for vertical crush loading

The test equipment shall be capable of exerting a downward force on the ROPS through a rigid beam up to a maximum of 250 mm wide, connected to the load-applying mechanism by means of universal pin joints. Suitable axle stands shall be provided so that the machine's tyres do not bear the vertical crush load force. See Figure 6.

### 4.3 Other measuring apparatus

A device for checking that the ROPS has not entered the deflection-limiting volume (DLV), (see Clause 7), and that this volume has remained within the ROPS protection during testing, shall be used.

## 5 Preparation for strength testing

### 5.1 Purpose

Strength testing is intended to simulate such loads as are imposed on a ROPS when the machine overturns. These tests enable observations to be made on the strength of the ROPS and any brackets attaching it to the machine, as well as on any parts of the machine transmitting the test load.

### 5.2 Preparation rules for governing testing

The preparation for testing the ROPS is governed by the following general rules.

- a) The ROPS shall be to production specifications and shall be fitted to the appropriate machine model chassis in accordance with the manufacturer's declared attachment method. A complete machine is not required for the evaluation; however, the machine frame and ROPS mounting shall represent an operating installation.
- b) The assembly shall be secured to the bedplate so that the members connecting the assembly and the bedplate do not deflect significantly in relation to the ROPS under loading. The assembly shall not receive any support from the bedplate under loading other than that due to the initial attachment.
- c) Components that could create a hazard in the DLV shall also be fitted so that they can be examined to ascertain whether the requirements of the acceptance conditions have been fulfilled.
- d) All detachable windows, panels, canopies, and removable non-structural fittings shall be removed so that they do not contribute to the strength of the ROPS. In cases where it is possible to fix doors and windows open or remove them during work, they shall be either removed or fixed open for the test, so that they do not add to the strength of the ROPS. It shall be noted whether, in this position, they would create a hazard for the driver in the event of overturning.
- e) A track width setting for the rear wheels, if present, shall be chosen such that no interference exists with the ROPS during the tests. The assembly shall be supported and secured or modified so that all the test energy is absorbed by the ROPS and its attachment to the machine's rigid components.
- f) If, during the test procedure, any part of the machine restraining equipment breaks or moves, the test procedure shall be restarted.
- g) No repairs or adjustments of the machine or the ROPS are allowed during the test procedure.
- h) The ROPS shall be instrumented with the necessary equipment to obtain the required force-deflection data.

## 6 Test procedures

### 6.1 Test sequence

If an energy-absorbing or rigid ROPS is fabricated from materials meeting the cold weather embrittlement resistance requirements specified in Annex A, all the ROPS loadings may be conducted at ambient temperature. If an energy-absorbing or rigid folding ROPS is fabricated from materials not meeting the cold weather embrittlement resistance requirements specified in Annex A, all the ROPS loadings shall be conducted at  $-18\text{ }^{\circ}\text{C}$ .

NOTE This test procedure was developed for two- and four-post structures. For other designs, adaptation of the procedure could be necessary.

#### ROPS assembly 1 loadings

- a) longitudinal loading from the front, applied at either side;
- b) side loading from the side opposite to the applied longitudinal load;

c) vertical crush loading.

### ROPS assembly 2 loadings

d) longitudinal loading from the rear, applied at either side;

e) side loading from the side opposite to the applied longitudinal load;

f) vertical crush loading.

See also Figure 1.

## 6.2 Horizontal loading

### 6.2.1 Longitudinal loading

Apply the longitudinal load in a plane parallel to the reference plane (see Figure 2). The load application point shall be that part of the ROPS likely to hit the ground first in a longitudinal overturning incident (normally the upper edge). The vertical plane in which the load is applied is located at a distance of one-sixth the external width of the ROPS, inwards from the outside, as shown in Figure 3, or as close as possible depending on ROPS configuration. If the ROPS is curved or protruding at this point, add wedges enabling the load to be applied to it, but do so in a way that will not reinforce the ROPS.

The central pivot of an articulated machine shall be supported and securely mounted as appropriate for all test procedures. For the side-loading test procedure, the pivot shall also be propped from the side opposite the loading. Only the frame portion to which the ROPS is mounted need be used.

The energy absorbed,  $E_{il}$ , in joules, by the ROPS during the test shall be at least

$$E_{il} = 1,6 \cdot m_t$$


ISO 21299:2009

[https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-](https://standards.iteh.ai/catalog/standards/sist/6cc8af5e-c653-4f21-939c-7f2871-c251-21299-rops)

Alternatively, the static load force,  $F$ , in newtons, of the rigid ROPS during the test shall be at least

$$F = 20 \cdot m_t$$

Maintain this force at least 5 s after the cessation of any visually detectable movement of the ROPS.

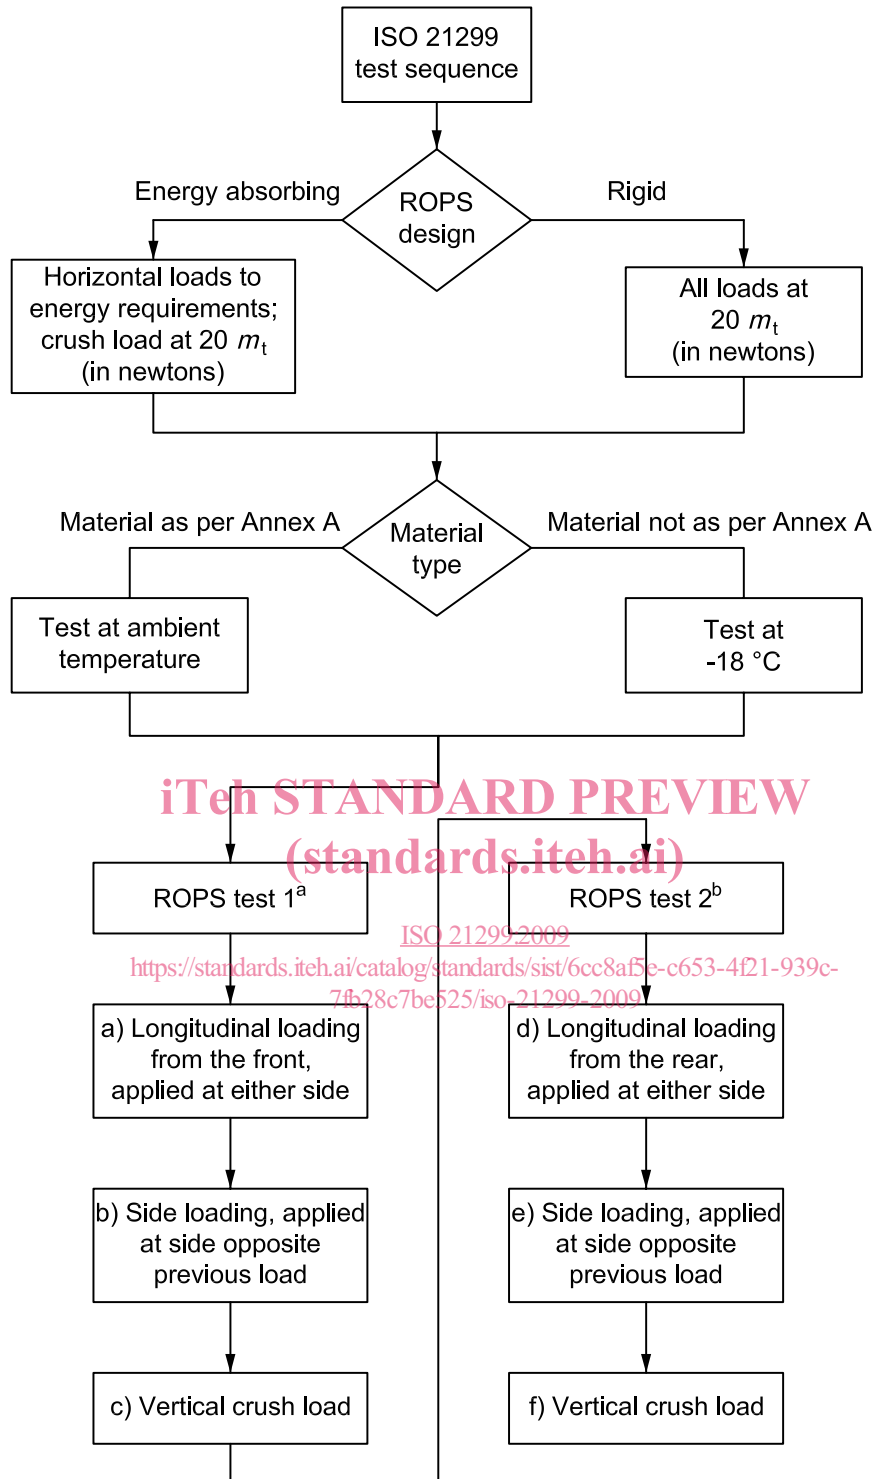

<sup>a</sup> If tests are performed using one ROPS assembly, the test load sequence shall be a), d), e), and f). For test loads a) and d), loads shall be applied at opposite sides.

<sup>b</sup> A second chassis may be used for the second ROPS test.

Figure 1 — ROPS test sequence