
**Vacuum technology — Bakable flanges —
Part 2:
Dimensions of knife-edge flanges**

Technique du vide — Brides étuvables —

Partie 2: Dimensions des brides à guillotine

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TS 3669-2:2007](https://standards.iteh.ai/catalog/standards/sist/1f4ab170-a72f-4c01-9132-594918823165/iso-ts-3669-2-2007)

<https://standards.iteh.ai/catalog/standards/sist/1f4ab170-a72f-4c01-9132-594918823165/iso-ts-3669-2-2007>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/TS 3669-2:2007](https://standards.iteh.ai/catalog/standards/sist/1f4ab170-a72f-4c01-9132-594918823165/iso-ts-3669-2-2007)

<https://standards.iteh.ai/catalog/standards/sist/1f4ab170-a72f-4c01-9132-594918823165/iso-ts-3669-2-2007>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

In other circumstances, particularly when there is an urgent market requirement for such documents, a technical committee may decide to publish other types of normative document:

- an ISO Publicly Available Specification (ISO/PAS) represents an agreement between technical experts in an ISO working group and is accepted for publication if it is approved by more than 50 % of the members of the parent committee casting a vote.
- an ISO Technical Specification (ISO/TS) represents an agreement between the members of a technical committee and is accepted for publication if it is approved by 2/3 of the members of the committee casting a vote.

<https://standards.iteh.ai/catalog/standards/sist/1f1ab170-a72f-4c01-9132-394918873165/iso-ts-3669-2-2007>

An ISO/PAS or ISO/TS is reviewed after three years in order to decide whether it will be confirmed for a further three years, revised to become an International Standard, or withdrawn. If the ISO/PAS or ISO/TS is confirmed, it is reviewed again after a further three years, at which time it must either be transformed into an International Standard or be withdrawn.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO/TS 3669-2 was prepared by Technical Committee ISO/TC 112, *Vacuum technology*.

ISO 3669 consists of the following parts, under the general title *Vacuum technology — Bakable flanges*:

- *Dimensions*
- *Part 2: Dimensions of knife-edge flanges* [Technical Specification]

Introduction

This Technical Specification contains significant technical changes from ISO 3669:1986, which defined two series of bakable flanges:

- a preferred series, the main dimensions of which ensure compatibility with already standardized non-bakable flanges (see ISO 1609);
- a secondary series corresponding to flanges in common use.

This part of ISO 3669 specifies only one series and is no longer dependent on the preferred number. Effectively, the preferred series has been made obsolete, thereby promoting the secondary series into being the one and only set of specified dimensions. Furthermore, several dimensions in what was formerly the secondary series have been modified to correspond to flanges in common use. Finally, detailed dimensions for the knife-edge sealing profile have been incorporated.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/TS 3669-2:2007](https://standards.iteh.ai/catalog/standards/sist/1f4ab170-a72f-4c01-9132-594918823165/iso-ts-3669-2-2007)

<https://standards.iteh.ai/catalog/standards/sist/1f4ab170-a72f-4c01-9132-594918823165/iso-ts-3669-2-2007>

Vacuum technology — Bakable flanges —

Part 2: Dimensions of knife-edge flanges

1 Scope

This part of ISO 3669 specifies the dimensions of fixed or rotatable bolted knife-edge style bakable flanges used in vacuum systems for pressures ranging from atmospheric to as low as 10^{-13} Pa.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

knife-edge style flange

metal sealed flange used for high and ultra-high vacuum service

NOTE 1 The sandwiching of one metal gasket between two knife-edge flanges and securely bolting these together makes a vacuum-tight joint. The seal is made when the *conical* knife edge profile of the flange cuts into the *flat* surface of a metal gasket.

NOTE 2 Originally developed as Conflat¹⁾ flanges. The widespread and continued use of knife-edge flanges has made these a *de facto* international standard, codified by this Technical Specification.

2.2

nominal bore

value intended to both identify the flange and specify the largest practical size of tubing that can be accommodated by the flange

NOTE See Table 1, in which the convention of identifying original flanges by the outside diameter of the flange (historically in inches) has been maintained.

2.3

leak check groove

groove machined into the seal side of the flange to facilitate the free passage of search gas from the outer perimeter of the flange to the seal zone near the metal gasket

1) Conflat® is the trade name of a product supplied by Varian Corporation. This information is given for the convenience of users of this Technical Specification and does not constitute an endorsement by ISO of the product named. Equivalent products may be used if they can be shown to lead to the same results.

3 Symbols

Symbol	Description	Unit
l_1	nominal outside diameter of flange	mm (in)
l_2	max tube	mm (in)
l_3	bolt hole	mm (in)
l_4	bolt circle	mm (in)
φ	position tolerance of bolt hole centre	mm
l_5	seal recess	mm (in)
l_6	knife edge	mm (in)
l_7	thickness of inner rotatable ring	mm (in)
l_8	depth of pipe connection	mm (in)
l_9	flange thickness	mm (in)
l_{11}	outside diameter of metal gasket	mm (in)

4 Requirements

4.1 Materials

iTeh STANDARD PREVIEW
(standards.iteh.ai)

4.1.1 Flange

The selection of the material shall be compatible with the requirements for the flanges. Considerations may include service temperature, sealing capacity, corrosion resistance, magnetic permeability, type of seal gasket used and dimensions.

NOTE Austenitic stainless steel is commonly used, but it is not the intent of this part of ISO 3669 to specify or limit the choice of flange material to austenitic stainless steel.

4.1.2 Bolt holes

The flange may have either clearance or tapped bolt holes.

NOTE As a number of flanges in use currently originated in the United States, the tapped flanges often have English tapped holes. Of increasing use are flanges with metric threads. Both are presented in this part of ISO 3669 (see Table 1).

4.1.3 Grooves

Leak check grooves should be used. The grooves shall be arranged equidistantly between the bolt holes.


4.1.4 Gasket

In general, the gasket should be softer than the flange to avoid dulling of flange knife edge.


NOTE Oxygen-free high conductivity (OFHC) copper is commonly used, but it is not the intent of this part of ISO 3669 to specify or limit the choice of gasket material to OFHC copper.

4.2 Dimensions

Flange dimensions are shown and specified in Figures 1 to 3 and in Table 1 and Table 2. See Figure 4 for the recommended dimensions of leak check grooves.

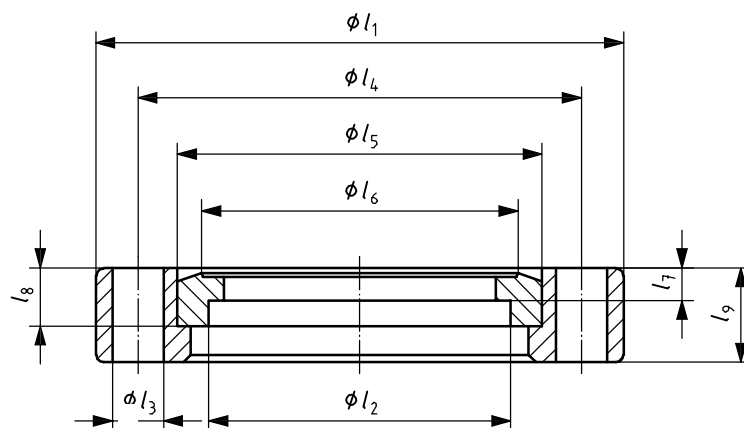

a) Rotatable flange

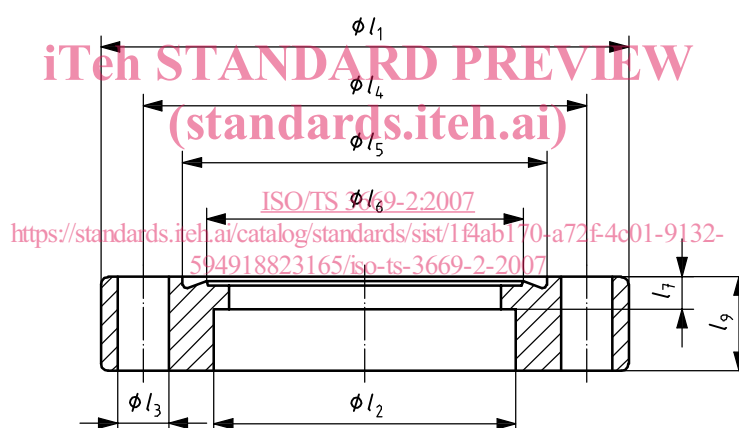

b) Non-rotatable flange

Figure 1 — Basic flange dimensions

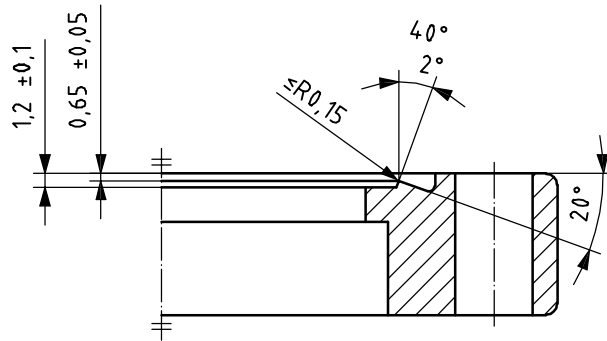


Figure 2 — Knife-edge detail


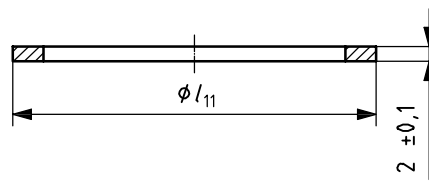


Figure 3 — Metal gasket

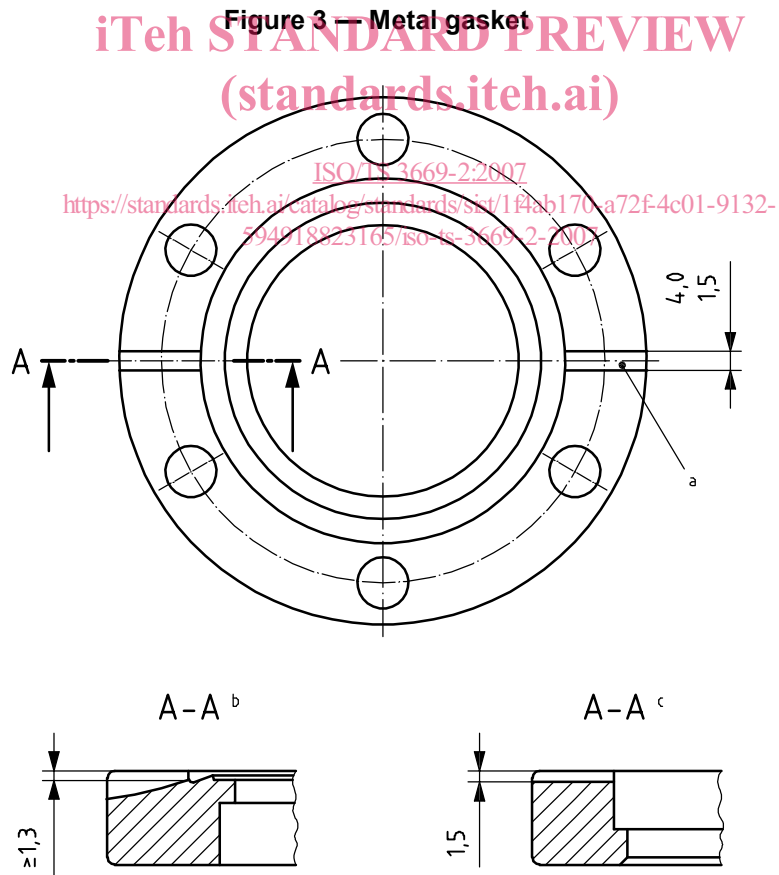

- a Recommendation: leak check groove equidistant ($\pm 0,15$ mm) between bolt holes.
- b Non-rotatable flange.
- c Rotatable flange.

Figure 4 — Recommended dimensions for leak check grooves

Table 1 — Flange dimensions

Nominal bore	l_1	l_2	No. bolts ^b	l_3	Bolt thread ^c	l_4	φ	l_5	l_6	l_7	l_8	l_9
	Nominal outside diameter	Max. tube ^a		Bolt hole		Bolt circle	Position tolerance of bolt hole centre	Seal recess	Knife edge	Thickness of inner rotatable ring	Depth of pipe connection	Flange thickness
	mm (in)	mm		Tol. +0,2 0 mm		mm	mm	Tol. +0,2 0 mm	Tol. $\pm 0,1$ mm	min mm	Tol. $\pm 0,1$ mm	min mm
10CF	25,0 (1,0)	12,0	6	3,3	M3 \times 0,5	17,50	φ 0,1	13,50	10,50	3,00	—	6,0
16CF	33,8 (1,33)	19,4	6	4,4	M4 \times 0,7 (#8-32)	27,00	φ 0,1	21,40	18,30	3,30	5,90	7,0
25CF	54,0 (2,12)	25,8	4	6,8	M6 \times 1,0 (1/4"-28)	41,30	φ 0,2	33,00	27,70	4,30	6,00	11,5
40CF	69,9 (2,75)	40,0	6	6,8	M6 \times 1,0 (1/4"-28)	58,70	φ 0,2	48,30	41,90	4,30	7,70	12,5
50CF	85,7 (3,38)	51,0	8	8,4	M8 \times 1,25 (5/16"-24)	72,40	φ 0,2	61,80	55,90	4,90	9,70	16,0
63CF	114,3 (4,50)	70,0	8	8,4	M8 \times 1,25 (5/16"-24)	92,20	φ 0,2	82,50	77,20	6,40	12,70	17,0
75CF	117,4 (4,62)	76,2	10	8,4	M8 \times 1,25 (5/16"-24)	102,30	φ 0,2	91,60	85,20	6,50	13,00	17,5
100CF	152,4 (6,00)	108,0	16	8,4	M8 \times 1,25 (5/16"-24)	130,30	φ 0,2	120,60	115,30	7,20	14,30	19,5
125CF	171,5 (6,75)	127,0	18	8,4	M8 \times 1,25 (5/16"-24)	151,60	φ 0,2	141,80	136,30	7,20	14,30	21,0
160CF	203,2 (8,00)	159,0	20	8,4	M8 \times 1,25 (5/16"-24)	181,00	φ 0,2	171,40	166,10	8,00	15,90	21,0
200CF	254,0 (10,00)	205,0	24	8,4	M8 \times 1,25 (5/16"-24)	231,80	φ 0,2	222,20	216,90	8,60	17,20	24,0
250CF	304,8 (12,00)	256,0	32	8,4	M8 \times 1,25 (5/16"-24)	284,00	φ 0,2	273,10	267,50	9,00	18,00	24,0
275CF	336,6 (13,25)	273,4	30	10,8	M10 \times 1,5 (3/8"-24)	306,30	φ 0,2	294,40	288,20	9,90	19,80	28,0
300CF	368,3 (14,5)	306,0	32	10,8	M10 \times 1,5 (3/8"-24)	338,10	φ 0,2	326,40	320,00	9,90	19,80	28,0
350CF	419,1 (16,5)	356,0	36	10,8	M10 \times 1,5 (3/8"-24)	388,90	φ 0,4	376,70	373,00	10,40	20,70	28,0
400CF	469,9 (16,5)	406,0	40	10,8	M10 \times 1,5 (3/8"-24)	437,90	φ 0,4	424,40	419,00	10,40	20,70	28,0

^a Given for guidance only and corresponding to commonly used austenitic stainless steel flanges.

^b Number of bolts equispaced on bolt circle.

^c Metric tap (English tap), according to ISO 965-1.