



SLOVENSKI STANDARD

SIST EN 13493:2018

01-junij-2018

Nadomešča:
SIST EN 13493:2013

Geosintetične ovire - Zahtevane lastnosti pri gradnji začasnih shramb za trdne odpadke in odlagališč

Geosynthetic barriers - Characteristics required for use in the construction of solid waste storage and disposal sites

Geosynthetische Dichtungsbahnen - Eigenschaften, die für die Anwendung beim Bau von Deponien und Zwischenlagern für feste Abfallstoffe erforderlich sind

Barrières géosynthétiques - Caractéristiques requises pour l'utilisation dans la construction des ouvrages de stockage et d'enfouissement de déchets solides

Ta slovenski standard je istoveten z: EN 13493:2018

ICS:

13.030.40	Naprave in oprema za odstranjevanje in obdelavo odpadkov	Installations and equipment for waste disposal and treatment
59.080.70	Geotekstilije	Geotextiles

SIST EN 13493:2018

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 13493:2018

<https://standards.iteh.ai/catalog/standards/sist/6ca1457e-6879-426a-9549-5ea1c589f86e/sist-en-13493-2018>

EUROPEAN STANDARD

EN 13493

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2018

ICS 59.080.70; 91.100.50

Supersedes EN 13493:2013

English Version

Geosynthetic barriers - Characteristics required for use in the construction of solid waste storage and disposal sites

Géomembranes et géosynthétiques bentonitiques -
Caractéristiques requises pour l'utilisation dans la
construction des ouvrages de stockage et
d'enfouissement de déchets solides

Geosynthetische Dichtungsbahnen - Eigenschaften, die
für die Anwendung beim Bau von Deponien und
Zwischenlagern für feste Abfallstoffe erforderlich sind

This European Standard was approved by CEN on 5 November 2017.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword.....	4
Introduction	5
1 Scope	6
2 Normative references	6
3 Terms, definitions and abbreviations	9
3.1 Terms and definitions	9
3.2 Abbreviations	11
4 Characteristics and corresponding methods of test	11
4.1 General	11
4.2 Types of application	12
4.2.1 General	12
4.2.2 Application 1: “Composite lining system”	12
4.2.3 Application 2: “Single lined system”	13
4.3 Relevant characteristics	13
4.4 Characteristics relevant to specific conditions of use	20
4.4.1 General	20
4.4.2 Gas permeability	20
4.4.3 Burst strength and elongation	20
4.4.4 Tear strength	20
4.4.5 Friction characteristics (direct shear and inclined plane tests)	20
4.4.6 Low temperature behaviour	20
4.4.7 Weathering	21
4.4.8 Resistance to wetting and drying	21
4.4.9 Freeze-thaw cycle resistance	21
4.4.10 Resistance to root penetration	21
4.5 Release of dangerous substances	21
5 Assessment and verification of constancy of performance (AVCP)	21
5.1 General	21
5.2 Type testing	22
5.2.1 General	22
5.2.2 Test samples, testing and compliance criteria	22
5.2.3 Test reports	23
5.2.4 Shared other party results	23
5.2.5 Cascading determination of the product type results	24
5.3 Factory production control (FPC)	25
5.3.1 General	25
5.3.2 Requirements	25
5.3.3 Product specific requirements	31
5.3.4 Initial inspection of factory and of FPC	32
5.3.5 Continuous surveillance of FPC	32
5.3.6 Procedure for modifications	32
5.3.7 One-off products, pre-production products (e.g. prototypes) and products produced in very low quantity	32
Annex A (normative) Durability of geosynthetic barriers	34

A.1	General	34
A.2	Weathering	35
A.3	Products used with a service life up to 5 years	37
A.4	Other applications and service life of 25 and 50 years	37
A.5	Durability tests on GBR-P	43
A.6	Evaluation tests on GBR-P and GBR-C	49
A.7	Durability tests on GBR-B	50
A.8	Evaluation tests on GBR-B	54
Annex ZA (informative) Relationship of this European Standard with Regulation (EU)		
	No. 305/2011	56
	Bibliography	60

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[SIST EN 13493:2018](https://standards.iteh.ai/catalog/standards/sist/6ca1457e-6879-426a-9549-5ea1c589f86e/sist-en-13493-2018)

<https://standards.iteh.ai/catalog/standards/sist/6ca1457e-6879-426a-9549-5ea1c589f86e/sist-en-13493-2018>

EN 13493:2018 (E)**European foreword**

This document (EN 13493:2018) has been prepared by Technical Committee CEN/TC 189 “Geosynthetics”, the secretariat of which is held by NBN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2018, and conflicting national standards shall be withdrawn at the latest by December 2019.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 13493:2013.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

For relationship with Regulation (EU) No. 305/2011, see informative Annex ZA, which is an integral part of this document.

The main changes with respect to the previous edition are listed below:

- STANDARD PREVIEW**
(standards.iteh.ai)
- the list of normative references has been updated;
 - in 3.1 three terms have been added;
 - in 3.2 list of abbreviations has been updated;
 - in 4.3, Table 1, has been modified to comply with the modified mandate M/386 (inclusion of elongation in separation and filtration functions) and has been technically revised, all H-coded characteristics have been replaced by “A”;
 - Clause 5 “Evaluation of conformity” has been superseded by new Clause 5 “Assessment and verification of constancy of performance (AVCP)”;
 - Annex A “Factory production control – Factory production control scheme” has been deleted;
 - former Annex B “Durability” becomes Annex A and has been totally revised;
 - Annex ZA has been updated according to new template to fulfil requirements of CPR, also examples for CE-marking have been deleted.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

This document allows manufacturers to describe geosynthetic barriers on the basis of declared values for characteristics relevant to the intended use and if tested to the specified method. It also includes procedures for assessment and verification of constancy of performance (AVCP) including the factory production control.

This document can also be used by designers, end-users and other interested parties as a tool to define relevant and appropriate characteristics for specifications.

Tests for some non-mandated characteristics are still under study and will be included when the standard is revised.

The term “product” used in this standard refers to a geosynthetic barrier, including polymeric geosynthetic barriers, clay geosynthetic barriers and bituminous geosynthetic barriers.

This document is part of a group of standards, addressing the requirements for geosynthetic barriers when used in a specific application.

Particular application cases can contain requirements about additional properties and - preferably standardized - test methods, if they are technically relevant and not conflicting with European Standards.

The design life of the product should be determined, since its function can be temporary, as construction expediency, or permanent, for the lifetime of the structure.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 13493:2018](https://standards.iteh.ai/catalog/standards/sist/6ca1457e-6879-426a-9549-5ea1c589f86e/sist-en-13493-2018)

<https://standards.iteh.ai/catalog/standards/sist/6ca1457e-6879-426a-9549-5ea1c589f86e/sist-en-13493-2018>

EN 13493:2018 (E)

1 Scope

This European Standard specifies the characteristics of geosynthetic barriers, including polymeric geosynthetic barriers, clay geosynthetic barriers and bituminous geosynthetic barriers, when used as fluid barriers and separation layer in the construction of solid waste storage and disposal sites, and the appropriate test methods to determine these characteristics.

The intended use of these products is to control the leakage of fluids through the construction.

This European Standard is not applicable to geotextiles or geotextile-related products as defined in EN ISO 10318-1.

This European Standard provides for the assessment and verification of constancy of performance (AVCP) of the product to this European Standard including factory production control procedures.

This European Standard defines characteristics to be considered with regard to the presentation of performance.

NOTE Where potable water is or can be in direct contact with the product, other relevant standards, requirements and/or regulations can be considered for the design.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 495-5:2013, *Flexible sheets for waterproofing — Determination of foldability at low temperature — Part 5: Plastic and rubber sheets for roof waterproofing*

EN 1109:2013, *Flexible sheets for waterproofing — Bitumen sheets for roof waterproofing — Determination of flexibility at low temperature*

EN 1110:2010, *Flexible sheets for waterproofing — Bitumen sheets for roof waterproofing — Determination of flow resistance at elevated temperature*

EN 1296:2000, *Flexible sheets for waterproofing — Bitumen, plastic and rubber sheets for roofing — Method of artificial ageing by long term exposure to elevated temperature*

EN 1427:2015, *Bitumen and bituminous binders — Determination of the softening point - Ring and Ball method*

EN 1844:2013, *Flexible sheets for waterproofing — Determination of resistance to ozone — Plastic and rubber sheets for roof waterproofing*

EN 1849-1:1999, *Flexible sheets for waterproofing — Determination of thickness and mass per unit area — Part 1: Bitumen sheets for roof waterproofing*

EN 1849-2:2009, *Flexible sheets for waterproofing — Determination of thickness and mass per unit area — Part 2: Plastic and rubber sheets*

EN 12224:2000, *Geotextiles and geotextile-related products — Determination of the resistance to weathering*

EN 12225:2000, *Geotextiles and geotextile-related products — Method for determining the microbiological resistance by a soil burial test*

- EN 12226:2012, *Geosynthetics — General tests for evaluation following durability testing*
- EN 12310-1:1999, *Flexible sheets for waterproofing — Part 1: Bitumen sheets for waterproofing — Determination of resistance to tearing (nail shank)*
- EN 12311-1:1999, *Flexible sheets for waterproofing — Part 1: Bitumen sheets for roof waterproofing — Determination of tensile properties*
- EN 12311-2:2013, *Flexible sheets for waterproofing — Determination of tensile properties — Part 2: Plastic and rubber sheets for roof waterproofing*
- EN 12447:2001, *Geotextiles and geotextile-related products — Screening test method for determining the resistance to hydrolysis in water*
- EN 13249:2016, *Geotextiles and geotextile-related products — Characteristics required for use in the construction of roads and other trafficked areas (excluding railways and asphalt inclusion)*
- EN 13250:2016, *Geotextiles and geotextile-related products — Characteristics required for use in the construction of railways*
- EN 13251:2016, *Geotextiles and geotextile-related products — Characteristics required for use in earthworks, foundations and retaining structures*
- EN 13252:2016, *Geotextiles and geotextile-related products — Characteristics required for use in drainage systems*
- EN 13253:2016, *Geotextiles and geotextile-related products — Characteristics required for use in erosion control works (coastal protection, bank revetments)*
- EN 13254:2016, *Geotextiles and geotextile-related products — Characteristics required for the use in the construction of reservoirs and dams*
- EN 13255:2016, *Geotextiles and geotextile-related products — Characteristics required for use in the construction of canals*
- EN 13256:2016, *Geotextiles and geotextile-related products — Characteristics required for use in the construction of tunnels and underground structures*
- EN 13257:2016, *Geotextiles and geotextile-related products — Characteristics required for use in solid waste disposals*
- EN 13265:2016, *Geotextiles and geotextile-related products — Characteristics required for use in liquid waste containment projects*
- EN 14150:2006, *Geosynthetic barriers — Determination of permeability to liquids*
- EN 14151:2010, *Geosynthetics — Determination of burst strength*
- EN 14196:2016, *Geosynthetics — Test methods for measuring mass per unit area of clay geosynthetic barriers*
- EN 14414:2004, *Geosynthetics — Screening test method for determining chemical resistance for landfill applications*

EN 13493:2018 (E)

EN 14415:2004, *Geosynthetic barriers — Test method for determining the resistance to leaching*

CEN/TS 14416:2014, *Geosynthetic barriers — Test method for determining the resistance to roots*

CEN/TS 14417:2014, *Geosynthetic barriers — Test method for the determination of the influence of wetting-drying cycles on the permeability of clay geosynthetic barriers*

CEN/TS 14418:2014, *Geosynthetic Barriers — Test method for the determination of the influence of freezing-thawing cycles on the permeability of clay geosynthetic barriers*

EN 14575:2005, *Geosynthetic barriers — Screening test method for determining the resistance to oxidation*

EN 14576:2005, *Geosynthetics — Test method for determining the resistance of polymeric geosynthetic barriers to environmental stress cracking*

EN 16416:2013, *Geosynthetic clay barriers — Determination of water flux index — Flexible wall permeameter method at constant head*

EN ISO 527-1:2012, *Plastics — Determination of tensile properties — Part 1: General principles (ISO 527-1:2012)*

EN ISO 527-3:1995, *Plastics — Determination of tensile properties — Part 3: Test conditions for films and sheets (ISO 527-3:1995)*

EN ISO 527-4:1997, *Plastics — Determination of tensile properties — Part 4: Test conditions for isotropic and orthotropic fibre-reinforced plastic composites (ISO 527-4:1997)*

EN ISO 1133-1:2011, *Plastics — Determination of the melt mass-flow rate (MFR) and melt volume-flow rate (MVR) of thermoplastics — Part 1: Standard method (ISO 1133-1:2011)*

EN ISO 1183-1:2012, *Plastics — Methods for determining the density of non-cellular plastics — Part 1: Immersion method, liquid pycnometer method and titration method (ISO 1183-1:2012)*

EN ISO 1183-2:2004, *Plastics — Methods for determining the density of non-cellular plastics — Part 2: Density gradient column method (ISO 1183-2:2004)*

EN ISO 1183-3:1999, *Plastics — Methods for determining the density of non-cellular plastics — Part 3: Gas pycnometer method (ISO 1183-3:1999)*

EN ISO 3696:1995, *Water for analytical laboratory use — Specification and test methods (ISO 3696:1987)*

EN ISO 9863-1:2016, *Geosynthetics — Determination of thickness at specified pressures — Part 1: Single layers (ISO 9863-1:2016)*

EN ISO 9864:2005, *Geosynthetics — Test method for the determination of mass per unit area of geotextiles and geotextile-related products (ISO 9864:2005)*

EN ISO 10318-1:2015, *Geosynthetics — Part 1: Terms and definitions (ISO 10318-1:2015)*

EN ISO 10319:2015, *Geosynthetics — Wide-width tensile test (ISO 10319:2015)*

EN ISO 10773:2011, *Clay geosynthetic barriers — Determination of permeability to gases (ISO 10773:2011)*

EN ISO 11357-6:2013, *Plastics — Differential scanning calorimetry (DSC) — Part 6: Determination of oxidation induction time (isothermal OIT) and oxidation induction temperature (dynamic OIT) (ISO 11357-6:2008)*

EN ISO 12236:2006, *Geosynthetics — Static puncture test (CBR test) (ISO 12236:2006)*

EN ISO 12957-1:2005, *Geosynthetics — Determination of friction characteristics — Part 1: Direct shear test (ISO 12957-1:2005)*

EN ISO 12957-2:2005, *Geosynthetics — Determination of friction characteristics — Part 2: Inclined plane test (ISO 12957-2:2005)*

EN ISO 13438:2004, *Geotextiles and geotextile-related products — Screening test method for determining the resistance to oxidation (ISO 13438:2004)*

ISO 34-1:2015, *Rubber, vulcanized or thermoplastic — Determination of tear strength — Part 1: Trouser, angle and crescent test pieces*

ISO 11465:1993, *Soil quality — Determination of dry matter and water content on a mass basis — Gravimetric method*

ASTM D696, *Standard Test Method for Coefficient of Linear Thermal Expansion of Plastics Between -30°C and 30°C with a Vitreous Silica Dilatometer*

ASTM D1434, *Standard Test Method for Determining Gas Permeability Characteristics of Plastic Film and Sheeting*

ASTM D4603, *Standard Test Method for Determining Inherent Viscosity of Poly(Ethylene Terephthalate) (PET) by Glass Capillary Viscometer*

ASTM D5890, *Standard Test Method for Swell Index of Clay Mineral Component of Geosynthetic Clay Liners*

ASTM D7409, *Standard Test Method for Carboxyl End Group Content of Polyethylene Terephthalate (PET) Yarns*

3 Terms, definitions and abbreviations

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in EN ISO 10318-1 and the following apply.

3.1.1

product

geosynthetic barrier, including polymeric, bituminous and clay barriers

EN 13493:2018 (E)

3.1.2

geosynthetic barrier

barrier with at least one of whose components is made from a synthetic or natural polymer, in the form of a sheet, a strip or a three dimensional structure, used in contact with soil and/or other materials in geotechnical and civil engineering applications

3.1.3

project specification

document in which the works, functions, specific conditions and required material property values of the geosynthetic barrier are described

3.1.4

waste disposal site

site for the deposit of waste (landfills), including facilities where solid waste is unloaded and stored in order to permit its preparation for further transport for recovery, treatment or disposal elsewhere

3.1.5

solid waste

waste in solid form including liquid-solid mixtures having capability to be handled as, or mixed with solid waste for storage purposes

3.1.6

basal liner

material which forms the main barrier to prevent the escape of contained fluids from the base of the facility

3.1.7

side liner

material which forms the main barrier to prevent the escape of contained fluids from the sides of the facility

3.1.8

capping liner

material placed above the waste or contaminated material to prevent the ingress of water and the uncontrolled escape of fluids and/or gases

3.1.9

fluid

gas, liquid and vapour in its pure phase as well as mixtures thereof

[SOURCE: EN 764-1:2015+A1:2016, 3.1.5]

3.1.10

rework material**RWM**

material that is generated in a process and capable of being reclaimed within the same process that generated it

[SOURCE: EN 13249:2016, 3.1.3]

3.1.11**post-consumer material****PCM**

material generated by households or by commercial, industrial and institutional facilities in their role as end-users of the product which can no longer be used for its intended purpose

Note 1 to entry: This includes returns of material from the distribution chain.

[SOURCE: EN 13249:2016, 3.1.4]

3.1.12**post-industrial material****PIM**

material diverted from the waste stream during a manufacturing process

[SOURCE: EN 13249:2016, 3.1.5]

3.2 Abbreviations

For the purposes of this document, the abbreviations given in EN ISO 10318-1 and the following apply:

CWFT: classification without further testing

EPDM: ethylene propylene diene monomer

EVA: ethylene vinyl acetate

FPO: flexible polyolefine

FPP: flexible polypropylene

GBR-P: polymeric geosynthetic barrier

GBR-B: bituminous geosynthetic barrier

GBR-C: clay geosynthetic barrier

HP-OIT: high pressure – oxidation induction time

OIT: oxidation induction time

PE-HD: high density polyethylene

PE-LLD: linear low density polyethylene

PE-VLD: very low density polyethylene

PVC-P: flexible polyvinylchloride

4 Characteristics and corresponding methods of test**4.1 General**

The main function of geosynthetic barriers used in the construction of solid waste storage and disposal sites, is to prevent the movement of fluids through the construction and to prevent the leachate of the stored materials from moving into the surrounding ground. This includes the use of a geosynthetic barrier as a basal, side or capping liner. Damage during installation has not been addressed in this document.


4.2 Types of application

4.2.1 General

The main function of geosynthetic barriers used in the construction of solid waste disposal sites is to prevent or reduce the flow of fluid through the structure.

4.2.2 Application 1: “Composite lining system”

In this application, GBR is used as a composite lining system in the base and/or cover. Figure 1 shows a typical cross-section.

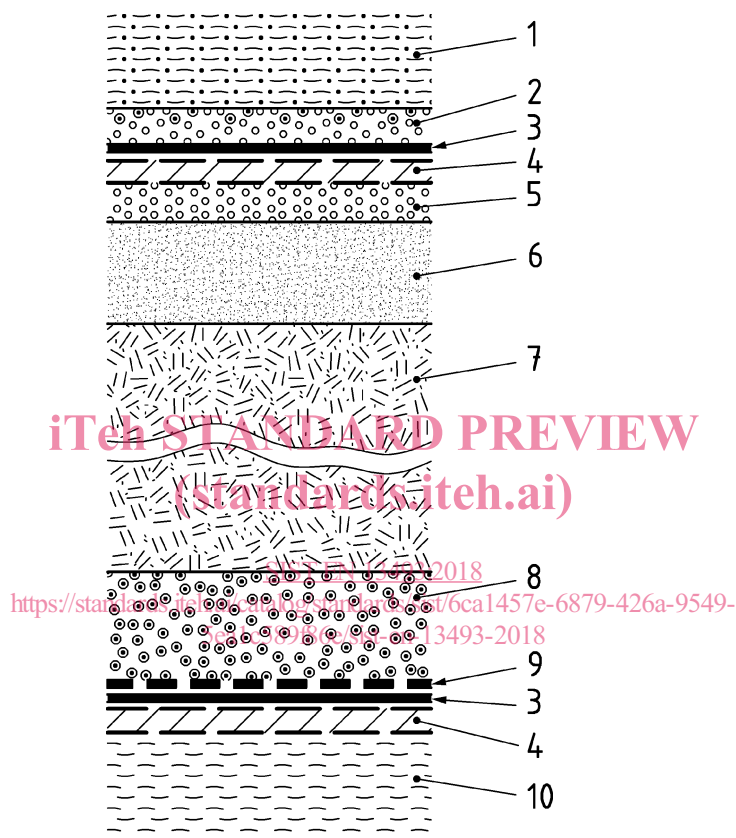


Key

- 1 top soil
- 2 rain water collection layer, optional with geosynthetic protection layer (optional geosynthetic drainage system)
- 3 geosynthetic barrier (GBR-P or GBR-B)
- 4 geosynthetic barrier (GBR-C)
- 5 gas drainage layer (optional geosynthetic venting system)
- 6 levelling layer
- 7 waste body
- 8 leachate collection system (optional geosynthetic drainage system)
- 9 protection layer e.g. geosynthetic
- 10 subgrade

Figure 1 — Geosynthetic barrier as a typical high performance composite lining system for municipal solid waste disposal sites

4.2.3 Application 2: “Single lined system”

In this application, the single GBR is used in the base and/or cover. Figure 2 shows a typical cross-section.

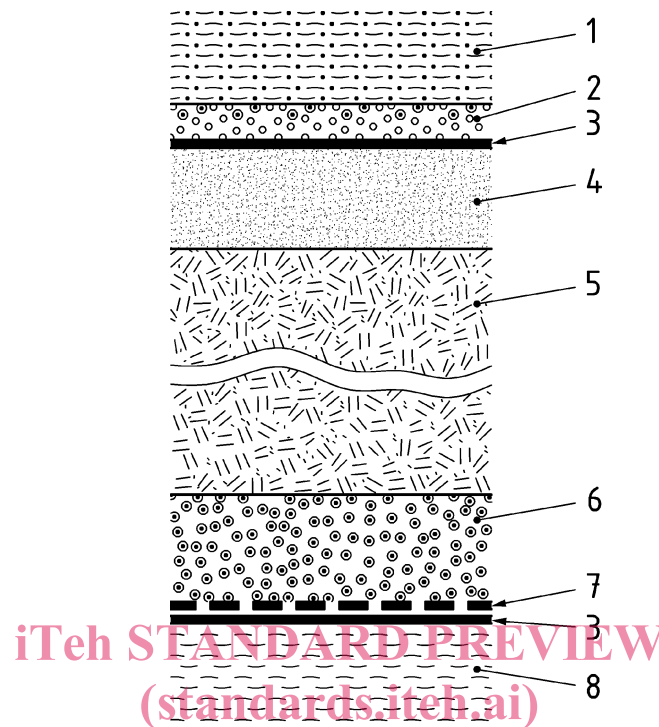

Key

- | | | |
|---|--|---|
| 1 | top soil | https://standards.iteh.ai/catalog/standards/sist/6ca1457e-6879-426a-9549-5ea1c589f86e/sist-en-13493-2018 |
| 2 | rain water collection layer | |
| 3 | geosynthetic barrier | |
| 4 | levelling layer | |
| 5 | waste body | |
| 6 | leachate collection system (optional geosynthetic drainage system) | |
| 7 | protection layer e.g. geosynthetic | |
| 8 | subgrade | |

Figure 2 — Geosynthetic barrier as a single lined system for solid waste disposal sites

4.3 Relevant characteristics

The characteristics, their relevance to the conditions of use, and the test methods to be used, are specified in Table 1. The list of characteristics in Table 1 includes those relevant to all conditions of use (A) (essential characteristics are listed in Table ZA.1), and those relevant to specific conditions of use (S). The indication “-” means that the characteristic is not relevant for that function.

Where, for the same property, data for more than one function shall be provided, the following ranking order shall be observed: A overrules S, and S overrules “-”.

The functions and conditions of use, corresponding with the S-coded characteristics in Table 1, are specified in 4.4.

The performances of the characteristics are given on basis of the results of tests specified in this document and, where relevant, in accordance with 5.1.