



SLOVENSKI STANDARD  
SIST EN 301 238 V1.1.3:2003  
01-december-2003

8 [[ ]HJbY]nVc`yUbYvfYnj fj ] bYhY\_ca i b]\_UWY'fB 97HL'È'DfcZ`dcXUh\_cj b]`  
glcf]hYj`fB GD'È`nc\ fcb]dcXUh\_cj b]bcg]YWg'g`YXYbYa`fglcf]hYj`h'dU8 ž  
a cV]bcghfUnfYXU&L

Digital Enhanced Cordless Telecommunications (DECT); Data Services Profile (DSP);  
Isochronous data bearer services with roaming mobility (service type D, mobility class 2)

**iteh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 301 238 V1.1.3:2003](https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-476dc09c012/sist-en-301-238-v1-1-3-2003)

Ta slovenski standard je istoveten z: **EN 301 238 Version 1.1.3**

**ICS:**

33.070.30      Öä ãæ ^Á à [ |zæ ^      Digital Enhanced Cordless  
à!^: ç!çã } ^Á ^\ [ { ~ } ä æã      Telecommunications (DECT)  
ÇÖÖVD

**SIST EN 301 238 V1.1.3:2003**      en

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST EN 301 238 V1.1.3:2003](https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003)

<https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003>

# EN 301 238 V1.1.3 (1998-06)

*European Standard (Telecommunications series)*

**Digital Enhanced Cordless Telecommunications (DECT);  
Data Services Profile (DSP);  
Isochronous data bearer services with roaming mobility  
(service type D, mobility class 2)**

**iTeh STANDARD PREVIEW  
(standards.iteh.ai)**

[SIST EN 301 238 V1.1.3:2003](https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003)

<https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003>



---

**Reference**

DEN/DECT-020082 (bgo00ie0.PDF)

---

**Keywords**

Data, DECT, GSM, profile

**ETSI**

---

**Postal address**

F-06921, Sophia Antipolis Cedex - FRANCE

---

**Office address**

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C

Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Internet**

secretariat@etsi.fr

<http://www.etsi.fr>

<http://www.etsi.org>

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998.  
All rights reserved.

# Contents

Intellectual Property Rights .....	7
Foreword .....	7
1 Scope .....	8
2 Normative references .....	8
3 Definitions and abbreviations .....	10
3.1 Definitions .....	10
3.2 Abbreviations .....	10
4 Description of services .....	12
4.1 Reference configuration .....	12
4.2 Service objectives .....	13
4.2.1 General .....	13
4.2.2 32 kbit/s unprotected service .....	13
4.2.3 Unprotected rate adaptation service .....	13
5 Physical (PHL) layer requirements .....	13
6 MAC layer requirements .....	14
6.1 32 kbit/s unprotected service .....	14
6.2 Unprotected rate adaptation service .....	14
7 DLC layer requirements .....	21
7.1 C-plane requirements .....	21
7.2 U-plane requirements .....	21
7.2.1 32 kbit/s unprotected service .....	21
7.2.2 Unprotected rate adaptation service .....	21
8 NWK layer requirements .....	21
8.1 General .....	21
8.2 Requirements .....	22
9 Management entity requirements .....	22
10 Generic interworking conventions and procedures .....	23
10.1 Bit ordering .....	23
<b>Annex A (normative): LU9 - Unprotected Rate Adaptation for V.series Equipment (RAVE) service .....</b>	<b>24</b>
A.1 Overview .....	24
A.1.1 FU9 frame structure .....	24
A.1.1.1 General frame structure .....	24
A.1.1.2 FU9 buffering procedures .....	25
A.1.1.3 Connection handover .....	25
A.1.1.4 Transmission order .....	25
A.2 Alignment signal management .....	26
A.2.1 General .....	26
A.2.2 Procedures .....	26
A.3 V.24 signalling .....	27
A.3.1 General .....	27
A.3.2 Transmitter procedures .....	28
A.3.3 Receiver procedures .....	28
A.4 Rate coding .....	28
A.4.1 General .....	28
A.4.2 Transmitter procedures .....	29

A.4.3	Receiver procedures.....	30
A.5	DIC.....	30
A.5.1	General.....	30
A.5.2	Measurement of phase differences.....	30
A.5.3	Compensation control rules.....	31
A.5.3.1	General.....	31
A.5.3.2	Optimizing error resilience.....	32
A.5.3.2.1	Procedure for conveying state changes.....	32
A.5.3.2.2	Procedure for executing positive and negative compensation.....	32
A.6	Information field.....	32
A.6.1	General.....	32
A.6.2	User data rates.....	33
A.6.3	Information field filling rule.....	33
A.7	Primitives.....	34
<b>Annex B (normative):</b>	<b>Specific interworking conventions.....</b>	<b>35</b>
B.1	Interworking to connection-oriented isochronous bearer services.....	35
B.1.1	Scope.....	35
B.1.2	Reference configuration.....	35
B.1.2.1	PP.....	36
B.1.2.2	FP.....	36
B.1.2.3	General configuration.....	37
B.1.3	PP C-plane procedures.....	37
B.1.4	FP C-plane procedures.....	37
B.1.5	Network modem interworking service using V.24 connection.....	38
B.1.5.1	General.....	38
B.1.5.2	Reference configuration.....	38
B.1.5.3	TAF interworking to V.24.....	39
B.1.5.3.1	General.....	39
B.1.5.3.2	V.24 Interchange circuit handling rules.....	39
B.1.5.3.3	Call establishment signalling handling.....	39
B.1.5.3.4	Data transmission.....	39
B.1.5.4	DECT FP Interworking procedures.....	40
B.1.5.4.1	General.....	40
B.1.5.4.2	Call establishment signalling handling.....	40
B.1.5.4.3	V.24 Interchange circuit handling rules.....	41
B.1.5.4.4	Modem selection.....	41
B.1.5.4.5	Data transmission.....	41

B.2	<<IWU-ATTRIBUTES>> coding .....	44
<b>Annex C (normative):</b>	<b>Service D2; PT Profile Implementation Conformance Statement (ICS) - PHL layer.....</b>	<b>47</b>
<b>Annex D (normative):</b>	<b>Service D2; FT Profile Implementation Conformance Statement (ICS) - PHL layer.....</b>	<b>48</b>
<b>Annex E (normative):</b>	<b>Service D2; PT Profile Implementation Conformance Statement (ICS) and PT Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer .....</b>	<b>49</b>
E.1	Service D2; PT Profile Implementation Conformance Statement (ICS) - Medium Access Control (MAC) layer.....	50
E.2	Service D2; PT Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer .....	51
<b>Annex F (normative):</b>	<b>Service D2; FT Profile Implementation Conformance Statement (ICS) and Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer .....</b>	<b>58</b>
F.1	Service D2; FT Profile Implementation Conformance Statement (ICS) - Medium Access Control (MAC) layer.....	59
F.2	Service D2; FT Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer .....	60
<b>Annex G (normative):</b>	<b>Service D2; PT Profile Implementation Conformance Statement (ICS) - Data Link Control (DLC) layer.....</b>	<b>64</b>
G.1	C-plane .....	64
G.2	U-plane.....	64
G.2.1	U-plane 32 kbit/s unprotected service.....	64
G.2.2	U-plane unprotected rate adaptation service.....	64
<b>Annex H (normative):</b>	<b>Service D2; FT Profile Implementation Conformance Statement (ICS) - Data Link Control (DLC) layer.....</b>	<b>65</b>
H.1	C-plane .....	65
H.2	U-plane.....	65
H.2.1	U-plane 32 kbit/s unprotected service.....	65
H.2.2	U-plane unprotected rate adaptation service.....	65

<b>Annex J (normative):</b>	<b>Service D2; PT profile Requirement List (profile RL) and Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer .....</b>	<b>66</b>
J.1	Service D2; PT profile Requirement List (profile RL) - Network (NWK) layer .....	66
J.2	Service D2; PT Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer .....	68
<b>Annex K (normative):</b>	<b>Service D2; FT profile Requirement List (profile RL) and Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer .....</b>	<b>69</b>
K.1	Service D2; FT profile Requirement List (profile RL) - Network (NWK) layer .....	70
K.2	Service D2; FT Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer .....	71
History .....		72

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 238 V1.1.3:2003](https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003)

<https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003>



---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETR 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.fr/ipr> or <http://www.etsi.org/ipr>).

Pursuant to the ETSI Interim IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETR 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT).

National transposition dates	
Date of adoption of this EN:	5 June 1998
Date of latest announcement of this EN (doa):	30 September 1998
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 March 1999
Date of withdrawal of any conflicting National Standard (dow):	31 March 1999

<https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003>

## 1 Scope

The present document specifies a profile for Digital Enhanced Cordless Telecommunications (DECT) systems conforming to EN 300 175, Parts 1 to 7 ([1] to [7]). It is part of a family of profiles aimed at the general connection of terminals supporting non-voice services to a fixed infra-structure, private and public.

The type D service, mobility class 2, as described in the ETR 185 [9] supports Isochronous Data Bearer Services (IDBSs) with mobility and is suitable for transparent transfer of isochronous data streams. It is intended for use in private and public roaming applications. Video telephony, video conferencing and secure telephone services (end-to-end encrypted) over external networks can be considered as applications of IDBS.

Phase 1 of the present document defines an unprotected service offering an unrestricted digital 32 kbit/s data bearer service, strongly based on the Generic Access Profile (GAP) (defined in EN 300 444 [8]), and an unprotected single bearer, multi-rate, rate adaptation service to interwork to synchronous ITU-T Recommendations V.series interfaces is also defined.

Further phases of this profile may additionally provide multiple rate, multibearer support and limited error correction capability for services/applications requiring higher rates and high quality isochronous data transmission.

The present document specifies the requirements on the Physical (PHL) layer, Medium Access Control (MAC) layer, Data Link Control (DLC) layer and Network (NWK) layer of DECT. The present document also specifies Management Entity (ME) requirements and generic Interworking Conventions (IC).

## 2 Normative references

References may be made to:

(standards.iteh.ai)

- a) specific versions of publications (identified by date of publication, edition number, version number, etc.), in which case, subsequent revisions to the referenced document do not apply; or
- b) all versions up to and including the identified version (identified by "up to and including" before the version identity); or
- c) all versions subsequent to and including the identified version (identified by "onwards" following the version identity); or
- d) publications without mention of a specific version, in which case the latest version applies.

A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical layer (PHL)".
- [3] EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- [4] EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".
- [5] EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- [6] EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".

- [7] EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".
- [8] EN 300 444: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP)".
- [9] ETR 185: "Digital Enhanced Cordless Telecommunications (DECT); Data Services Profile (DSP); Profile overview".
- [10] ITU-T Recommendation V.110: "Support by an ISDN of data terminal equipments with V-Series type interfaces".
- [11] CCITT Recommendation V.24 (1988): "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE)".
- [12] ITU-T Recommendation V.34 (1996): "A modem operating at data signalling rates of up to 33 600 bit/s for use on the general switched telephone network and on leased point-to-point 2-wire telephone-type circuits".
- [13] ETS 300 474-1: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma; Part 1: Portable radio Termination (PT)".
- [14] ETS 300 474-2: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma; Part 2: Fixed radio Termination (FT)".
- [15] ETS 300 476-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 1: Network (NWK) layer - Portable radio Termination (PT)".
- [16] ETS 300 476-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 3: Medium Access Control (MAC) layer - Portable radio Termination (PT)".
- [17] ETS 300 476-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 4: Network (NWK) layer - Fixed radio Termination (FT)".
- [18] ETS 300 476-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 6: Medium Access Control (MAC) layer - Fixed radio Termination (FT)".
- [19] ITU-T Recommendation R.140: "Definitions of essential technical terms in the field of telegraph transmission".

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following definitions apply:

- a) the definitions in EN 300 444 [8]; and
- b) the following terms:

**bearer service:** A type of telecommunications service that provides the capability for the transmission of signals between user/network interfaces. For DECT systems, the Air (Radio) interface provides the bearer services between the DECT Fixed radio Termination and the DECT Portable radio Termination.

**isochronous:** Pertaining to a signal or a time-varying phenomenon characterized by significant instants separated by time intervals having a duration theoretically equal to the duration of a unit interval or to an integral multiple of this duration (ITU-T Recommendation R.140 [19]).

**mobility class 1:** Closed user groups, for which terminals are pre-registered off-air with one or more specific Fixed Parts (FP), and establishment of service and user parameters is therefore implicit, according to a profile-defined list.

**mobility class 2:** Private and public roaming applications for which terminals may move between FPs within a given domain and for which association of service parameters is explicit at the time of service request.

**service:** A set of functions offered to a user by an organization.

**synchronous:** The essential characteristics of time-scales or signals such that their corresponding significant instants occur at precisely the same average rate. (not in ITU-T Recommendation R.140 [19])

**synchronous transmission:** Transmission using isochronous signals in which the sending and receiving instruments are operating continuously in a constant time difference between corresponding significant instants (ITU-T Recommendation R.140 [19]).

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AAL	ATM Adaptation Layer
AI	Air Interface
ATM	Asynchronous Transfer Mode
CC	Call Control
C-plane	Control plane
CRC	Cyclic Redundancy Check
Cs	higher layer signalling Channel (slow)
DCE	Data Circuit-terminating Equipment
DIC	DECT Independent Clocking
DLC	Data Link Control
DSP	Data Services Profile
DTE	Data Terminal Equipment
FP	Fixed Part
FT	Fixed radio Termination
GAP	Generic Access Profile
GSM	Global System for Mobile communication
I	higher layer Information channel
IC	Interworking Conventions
ICS	Implementation Conformance Statement
IDBS	Isochronous Data Bearer Service
IE	Information Element
ISDN	Integrated Services Digital Network

IWF	Interworking Functions
IWP	Interworking Profile
IWU	Interworking Unit
LA	Location Area
LCE	Link Control Entity
LCN	Logical Connection Number
MAC	Medium Access Control
ME	Management Entity
MM	Mobility Management
MUX	MUltipleX
NWK	NetWorK
PHL	PHysical
PICS	Protocol Implementation Conformance Statement
PP	Portable Part
ppm	parts per million
PSTN	Public Switched Telephone Network
PT	Portable radio Termination
RAVE	Rate Adaption for V.series Equipment
RFP	Radio Fixed Part
SAP	Service Access Point
SDU	Service Data Unit
TAF	Terminal Adaptation Functions
TDMA	Time Division Multiple Access
ULEI	U-plane Link Endpoint Identifier
U-plane	User plane

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 238 V1.1.3:2003](https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003)

<https://standards.iteh.ai/catalog/standards/sist/ace9818f-9a35-4fd4-9ee0-47bdc8d9c612/sist-en-301-238-v1-1-3-2003>

## 4 Description of services

### 4.1 Reference configuration

The reference configuration for this profile shall be as shown in figure 1.

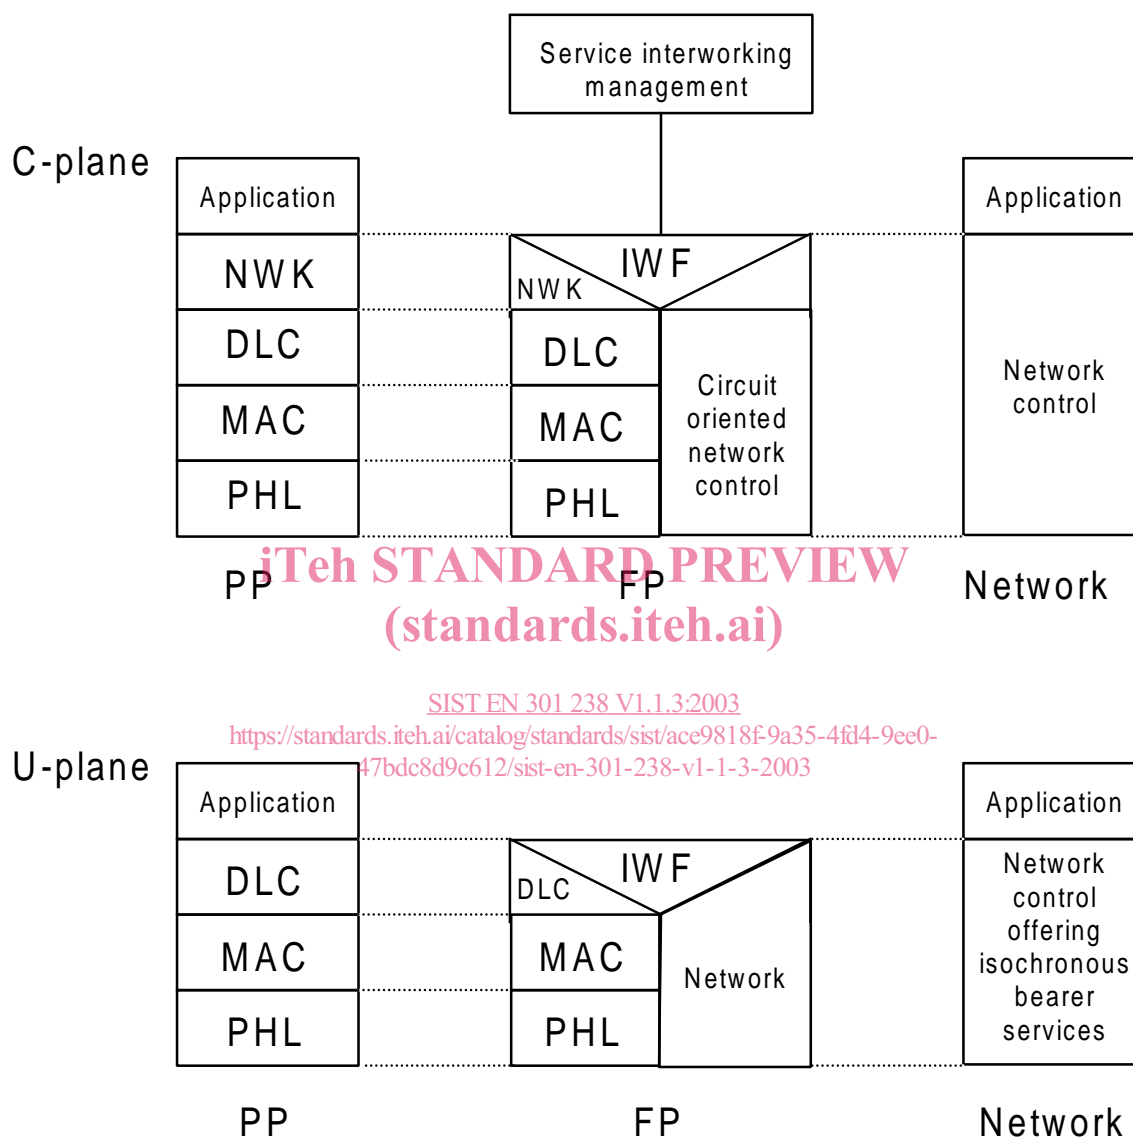


Figure 1: Profile reference configuration showing interworking to connection-oriented networks via the C-plane and U-plane

## 4.2 Service objectives

### 4.2.1 General

The service objectives for the Control plane (C-plane) are those of mobility class 2, described in subclause 6.2.2 of ETR 185 [9].

The service objectives for the User plane (U-plane) are listed in subclauses 4.2.2 and 4.2.3.

### 4.2.2 32 kbit/s unprotected service

The U-plane service objective for the unprotected service are detailed in table 1.

**Table 1: Service objectives of the 32 kbit/s unprotected service**

Transfer mode	Circuit mode
Transfer capability	Unrestricted digital
Data structure integrity	semi-octet
Continuous data rate	32 kbit/s
User data protection	none
User data delay	10 ms
Service change and negotiation	optional
Encryption support	mandatory

### 4.2.3 Unprotected rate adaptation service

The U-plane service objective for the unprotected rate adaptation service are detailed in table 2.

**Table 2: Service objectives of the unprotected rate adaptation service**

Transfer mode	Circuit mode
Transfer capability	Unrestricted digital
Data structure integrity	octet
Continuous data rate	by steps of 2,4 kbit/s up to 28,8 kbit/s; and by steps of 4 kbit/s up to 28,0 kbit/s
User data protection	none
User data delay	15 ms
Service change and negotiation	optional
Encryption support	mandatory
Network independent clocking	supported
In band rate changes	supported
V.24 control signalling	optional
Asymmetric rates	supported

## 5 Physical (PHL) layer requirements

The requirements of the GAP, defined in EN 300 444 [8], clause 11 shall apply, with the following exception:

- in subclause 11.1, the sentence "To carry the speech information, full slots shall be used" shall be replaced by "Full slots shall be used".