



SLOVENSKI STANDARD
oSIST prEN ISO 14405-1:2014
01-januar-2014

Specifikacija geometrijskih veličin izdelka - Tolerance dimenzij - 1. del: Dolžinske mere (ISO/DIS 14405-1:2013)

Geometrical product specifications (GPS) - Dimensional tolerancing - Part 1: Linear sizes (ISO/DIS 14405-1:2013)

Geometrische Produktspezifikation (GPS) - Dimensionelle Tolerierung - Teil 1: Längenmaße (ISO/DIS 14405-1:2013)

Spécification géométrique des produits (GPS) - Tolérancement dimensionnel - Partie 1: Tailles linéaires (ISO/DIS 14405-1:2013)

Ta slovenski standard je istoveten z: prEN ISO 14405-1

ICS:

17.040.10 Tolerance in ujemi Limits and fits

oSIST prEN ISO 14405-1:2014 **en,fr,de**

DRAFT INTERNATIONAL STANDARD

ISO/DIS 14405-1.2

ISO/TC 213

Secretariat: DS

Voting begins on:
2013-11-07Voting terminates on:
2014-01-07

Geometrical product specifications (GPS) — Dimensional tolerancing —

Part 1: Linear sizes

*Spécification géométrique des produits (GPS) — Tolérancement dimensionnel —
Partie 1: Tailles linéaires*

[Revision of first edition (ISO 14405-1:2010)]

ICS: 17.040.10

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN ISO 14405-1:2016](https://standards.iteh.ai/catalog/standards/sist/5436efb4-90b5-4146-adb1-1f019e214205/sist-en-iso-14405-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/5436efb4-90b5-4146-adb1-1f019e214205/sist-en-iso-14405-1-2016>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel five month enquiry.

Should this draft be accepted, a final draft, established on the basis of comments received, will be submitted to a parallel two-month approval vote in ISO and formal vote in CEN.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.



Reference number
ISO/DIS 14405-1.2:2013(E)

© ISO 2013

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN ISO 14405-1:2016](https://standards.iteh.ai/catalog/standards/sist/5436efb4-90b5-4146-adb1-1f019e214205/sist-en-iso-14405-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/5436efb4-90b5-4146-adb1-1f019e214205/sist-en-iso-14405-1-2016>

Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

Contents

Page

Foreword.....	v
Introduction	vi
1 Scope	1
2 Normative references	2
3 Terms and definitions	3
4 Specification modifiers and symbols	17
5 Default specification operator for size	21
5.1 General.....	21
5.2 ISO default specification operator for size	21
5.3 Drawing-specific default specification operator for size.....	22
6 Drawing indication for special specification operators for size	23
6.1 General.....	23
6.2 Indication with one or more specification operators	25
7 Indication of the toleranced feature on which the size characteristic is defined	30
7.1 Complete toleranced feature of size	30
7.2 Specific fixed restricted portion of the feature of size.....	30
7.3 Any restricted portion of the feature of size of a specified length	31
7.4 Any cross section of a feature of size	32
7.5 Specific cross section of a feature of size	33
7.6 Requirement applied individually for more than one feature of size	35
7.7 Requirement applied simultaneously for more than one feature and considered as one feature of size.....	35
7.8 Flexible/non-rigid parts	36
8 Complementary indication.....	37
Annex A (normative) Proportions and dimensions of graphical symbols.....	38
Annex B (informative) Overview diagram for size	39
Annex C (informative) Former practice and consequences	40
Annex D (informative) Dat handling with rank-order modifiers.....	41
Annex E (informative) Relation to the GPS matrix model	49
Bibliography	51

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14405-1 was prepared by Technical Committee ISO/TC 213, *Dimensional and geometrical product specification and verification*.

This second edition cancels and replaces the first edition (ISO 14405-1:2010), clause 1, subclauses 3.1, 3.6, 3.11, 3.13, 5.3, 6.1, 6.2, 7.3, 7.8, tables 1 and 2 and figure(s) 3, 4, 9, 11, 12, 17, B.1 which have been technically revised. Clause 8, Figure 29, Annexes D and E have been added.

ISO 14405 consists of the following parts, under the general title *Geometrical product specifications (GPS) — Dimensional tolerancing*:

- *Part 1: Linear sizes*
- *Part 2: Dimensions other than linear sizes*
- *Part 3: Angular sizes*

ISO/DIS 14405-1.2

Introduction

This part of ISO 14405 is a geometrical product specification (GPS) standard and is to be regarded as a general GPS standard (see ISO/TR 14638). It influences chain links 1 to 3 of the chain of standards on size.

The ISO/GPS Masterplan given in ISO/TR 14638 gives an overview of the ISO/GPS system of which this document is a part. The fundamental rules of ISO/GPS given in ISO 8015 apply to this document and the default decision rules given in ISO 14253-1 apply to specifications made in accordance with this document, unless otherwise indicated.

For more detailed information of the relation of this part of ISO 14405 to other standards and the GPS matrix model, see Annex F.

Produced workpieces exhibit deviations from the ideal geometric form. The real value of the dimension of a feature of size is dependent on the form deviations and on the specific type of size applied.

The type of size to be applied to a feature of size depends on the function of the workpiece.

The type of size can be indicated on the drawing by a specification modifier for controlling the feature definition and evaluation method to be used.

iteh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN ISO 14405-1:2016](https://standards.iteh.ai/catalog/standards/sist/5436efb4-90b5-4146-adb1-1f019e214205/sist-en-iso-14405-1-2016)

<https://standards.iteh.ai/catalog/standards/sist/5436efb4-90b5-4146-adb1-1f019e214205/sist-en-iso-14405-1-2016>

Geometrical product specifications (GPS) — Dimensional tolerancing — Part 1: Linear sizes

Part 1: Linear sizes

IMPORTANT — The illustrations included in this International Standard are intended to illustrate the text and/or to provide examples of the related technical drawing specification; these illustrations are not fully dimensioned and toleranced, showing only the relevant general principles. As a consequence, the illustrations are not a representation of a complete workpiece, and are not of a quality that is required for use in industry (in terms of full conformity with the standards prepared by ISO/TC 10 and ISO/TC 213), and as such are not suitable for projection for teaching purposes

1 Scope

This part of ISO 14405 establishes the default specification operator for linear size and defines a number of special specification operators for linear size for features of size e.g. "cylinder", "sphere", "torus", "circle", "two parallel opposite planes", or "two parallel opposite straight lines".

It also defines the specification modifiers and the drawing indications for these linear sizes.

This part of ISO 14405 covers the following linear sizes:

- local size;
 - two-point size;
 - spherical size;
 - least material outer size;
 - section size;
 - portion size;
- global size;
 - direct global linear size;
 - least-squares size;
 - maximum inscribed size;
 - minimum circumscribed size;
 - minmax size;
 - indirect global linear size;
- calculated size;

ISO/DIS 14405-1.2

- circumference diameter;
- area diameter;
- volume diameter;
- rank-order size;
 - maximum size;
 - minimum size;
 - average size;
 - median size;
 - mid-range size;
 - range size;
 - quadratic range of sizes.

This part of ISO 14405 defines tolerances of linear sizes when there is:

- a + and/or – limit deviation (e.g. 0/–0,019) (see Figure 9);
- an upper limit of size (ULS) and/or lower limit of size (LLS) (e.g. 15,2 max., 12 min. or 30,2/30,181) (see Figure 11);
- an ISO tolerance class code in accordance with ISO 286-1 (e.g. 10 h6) (see Figure 10)

with or without modifiers (see Tables 1 and 2).

This part of ISO 14405 provides a set of tools to express several types of size characteristic. It does not present any information on the relationship between a function or a use and a size characteristic.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-1:2010, *Geometrical product specifications (GPS) — ISO code system for tolerances on linear sizes — Part 1: Basis of tolerances, deviations and fits*

ISO 10579:2010, *Geometrical product specifications (GPS) — Dimensioning and tolerancing — Non-rigid parts*

ISO 8015:2011, *Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules*

ISO 14660-2:1999, *Geometrical product specifications (GPS) — Geometrical features — Part 2: Extracted median line of a cylinder and a cone, extracted median surface, local size of an extracted feature*

ISO 17450-1:2011, *Geometrical product specifications (GPS) — General concepts — Part 1: Model for geometrical specification and verification*

ISO 17450-2:2012, *Geometrical product specifications (GPS) — General concepts — Part 2: Basic tenets, specifications, operators and uncertainties*

ISO 81714-1:2010, *Design of graphical symbols for use in the technical documentation of products — Part 1: Basic rules*

3 Terms and definitions

For the purposes of this document, the terms and definitions of ISO 286-1, ISO 8015, ISO 14660-2, ISO 17450-1, ISO 17450-2 and the following apply.

3.1

specification modifier

GPS specification element that changes the default definition of the basic GPS specification when applied

NOTE Specification modifiers may be defined by International Standards, national standards or by company standards/documents.

[SOURCE: ISO 17450-2:2012, 3.4.2]

3.2

feature of size


feature of linear size or feature of angular size

[SOURCE: ISO 17450-1:2011, 3.3.1.5]


Note 1 to entry Figures 1 and 2 illustrate a feature of size, type cylinder or two parallel opposite planes..

Note 2 to entry This part of ISO 14405 only deals with features of linear size which can be a cylinder, a sphere, two parallel opposite planes, a circle (intersection of a revolute surface and a plane perpendicular to the axis of the associated surface), two parallel opposite straight lines (longitudinal section of a surface and a plane which is established symmetrically to the associated axis for a cylindrical surface or a plane perpendicular to the plane of a prismatic surface), two opposite circles (intersection of a pair of revolute surface and a plane perpendicular to the axis of the revolute surface).

Note 3 to entry Two opposite straight lines can be symmetrically established from the associated axis for a cylindrical surface or a plane perpendicular to the plane of a prismatic surface), two opposite circles (intersection of a pair of revolute surface and a plane perpendicular to the axis of the revolute surface or intersection of a collection of two single surfaces and a section feature which is a cylinder).

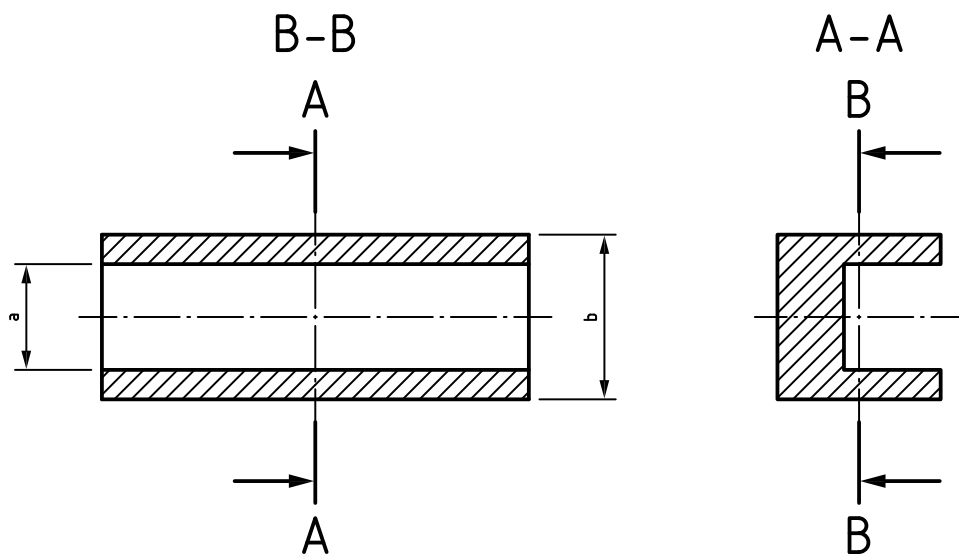

a) Nominal features of size (internal and external)

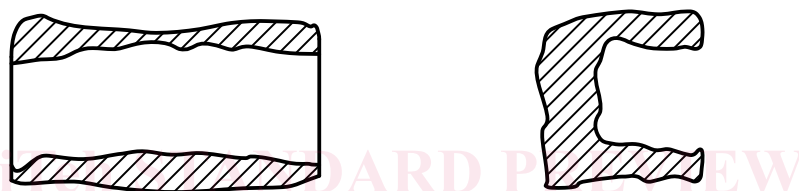


b) Extracted feature


- a Size of internal feature of size.
- b Size of external feature of size.

SIST EN ISO 14405-1:2016
<http://standards.iteh.ai/>
<http://www.iso.org/iso/14405-1-2016>

Figure 1 — Feature of sizes relative to two opposite planes

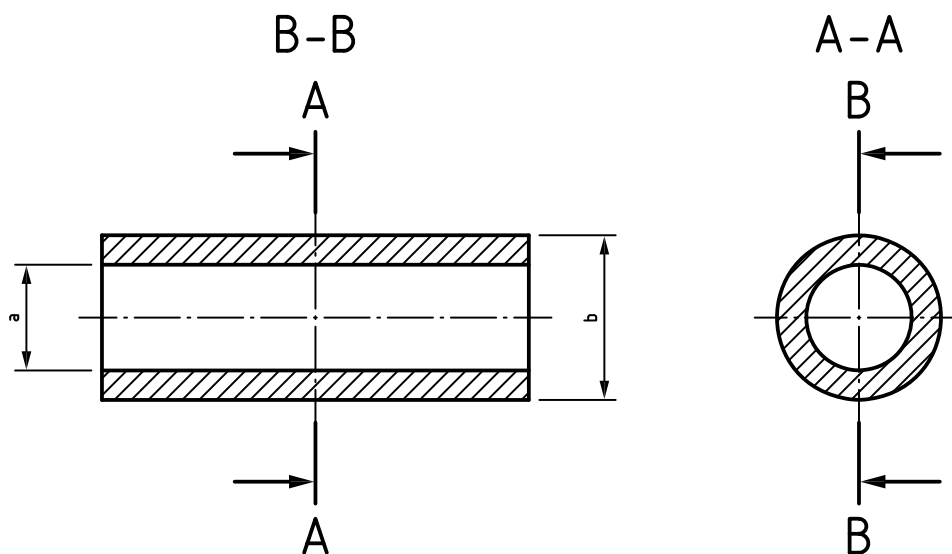

a) Nominal features of size (internal and external)

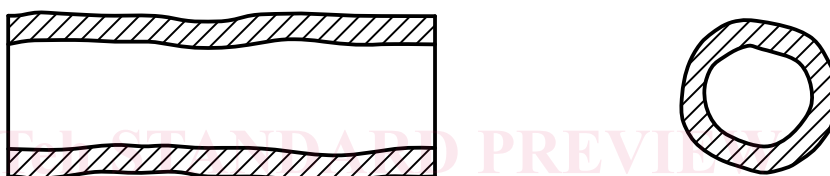

b) Extracted feature

- a Size of internal feature of size.
 b Size of external feature of size.

Figure 2 — Example of feature of size relative to a cylinder

3.3 upper limit of size (characteristic) ULS

largest permissible value applied to a **size characteristic** (3.9)

3.4 lower limit of size (characteristic) LLS

smallest permissible value applied to a **size characteristic** (3.9)

3.5 default specification operator

ordered set of default specification operations only, in the default order

Note 1 to entry The default specification operator can be

- an ISO default specification operator specified by ISO International Standards, or
- a national default specification operator specified by national standards, or
- a company default specification operator specified by company standards/documents, or
- a drawing default specification operator indicated on the drawing according to one of the above.

Note 2 to entry The default specification operator applies when the ISO basic GPS specification is used on the drawing.

ISO/DIS 14405-1.2

Note 3 to entry According to the ISO basic GPS specification for size, the tolerance is indicated by upper and/or lower deviation limits, or upper and/or lower limits of size (see Table 4), or by ISO tolerance codes in accordance with ISO 286-1 with no **specification modifiers** (3.1).

Note 4 to entry The ISO default specification operator for size is given in this part of ISO 14405 (see 5.2).

[SOURCE Adapted from ISO 17450-2:2012. The definition and note1 to entry are identical and the original second note and examples are not included here. Notes 2 to 4 to entry have been added].

3.6 drawing-specific default GPS specification operator

specification operator required by technical documentation, applicable or all basic GPS specifications of the actual drawing, and containing only default specification operations in the default order

Note 1 to entry See ISO 8015.

Note 2 to entry The drawing-specific default specification operator of size is indicated by a specific statement close to the title block (see 5.3).

3.7 special specification operator

specification operator which is required when a special GPS specification is used, including one or more special specification operations.

Note 1 to entry The special specification operator is defined by a GPS specification.

Note 2 to entry A special specification operator may be a complete specification operator or an incomplete specification operator.

Note 3 to entry A special specification operator can be established from a default operator by modifying one or more operations.

EXAMPLE 1 The specification for a shaft of $\varnothing 30 \pm 0,1 \text{ (E)}$ is a special specification operator, because one of the specification operations, the association of the minimum circumscribed cylinder, is not a default specification operation.

EXAMPLE 2 The specification of $Ra 1,5$ using a 2,5 mm filter for a surface is a special specification operator, because one of the specification operations, the cut-off length used in the filtration, is not a default specification operation.

[SOURCE: ISO 17450-2:2012, 3.2.7]

3.8 size

intrinsic characteristic of a **feature of size** (3.2) that can be defined on a nominal feature or on an associated feature

Note 1 to entry In this part of ISO 14405, for example, the size corresponds to the diameter of a cylinder, or to the distance between two parallel opposite planes. Depending on the type of feature of size, the terms “diameter” and “distance” are synonyms for size.

Note 2 to entry A size is angular (e.g. angle of a cone) or linear (e.g. diameter of a cylinder). This part of ISO 14405 only deals with linear size.

Note 3 to entry One of the property of the feature of size is its unique nominal size along to it.

3.9 size characteristic

characteristic relative to a **size** (3.8) and defined from an extracted feature

See Figure B.1.

Note 1 to entry A size can be evaluated by more than one size characteristic (e.g. the two-point diameter or the diameter of the associated feature, taken on the extracted feature).

3.10

local size

local linear size

local size characteristic

local linear size characteristic

size characteristic (3.9) having by definition a non-unique result of evaluation along and/or around the **feature of size** (3.2)

Note 1 to entry For a given feature, an infinity of local sizes exists.

Note 2 to entry In this part of ISO 14405, “local size” is used instead of “local linear size”.

Note 3 to entry In Figure 3, examples of local size are shown. These examples do not take into account the **rank-order size** (3.11.2.2).

Note 4 to entry Elementary type of size characteristic are defined in Annex E.

3.10.1

two-point size

⟨local size⟩ distance between two opposite points taken on the **feature of size** (3.2)

Note 1 to entry A two-point size taken on cylinder can be called a “two-point diameter”. In ISO 14660-2, this is defined as a local diameter of an extracted cylinder.

Note 2 to entry A two-point size taken on two opposite planes can be called a “two-point distance”. In ISO 14660-2, this is defined as a local size of two parallel extracted surfaces.

Note 3 to entry

3.10.2

section size

global size (3.11) for a given cross section of the extracted feature

Note 1 to entry A section size is a **local size** (3.10) for the complete toleranced **feature of size** (3.2).

Note 2 to entry The cross section is defined with the same criterion as the one taken to define the **direct global size** (3.11.1).

Note 3 to entry On an extracted feature that corresponds to a cylinder, it is possible to define an infinite number of cross sections in which the diameter of the associated circle can be defined (with a specific association criterion). This is a section size.

3.10.3

portion size

global size (3.11) for a given portion of the extracted feature

Note 1 to entry A portion size is a **local size** (3.10) for the complete toleranced **feature of size** (3.2).

3.10.4

spherical size

⟨local size⟩ diameter of the maximum inscribed sphere

See Figure 3 c).