
**Measurement of fluid flow in closed
conduits — Ultrasonic meters for gas —**

**Part 2:
Meters for industrial applications**

*Mesurage de débit des fluides dans les conduites fermées —
Compteurs à ultrasons pour gaz —*

iTeh Standards

Partie 2: Compteurs pour applications industrielles

(<https://standards.iteh.ai>)
Document Preview

[ISO 17089-2:2012](#)

<https://standards.iteh.ai/catalog/standards/iso/ce45939e-0655-4088-a83f-3c9c577587c3/iso-17089-2-2012>



Reference number
ISO 17089-2:2012(E)

© ISO 2012

iTeh Standards

(<https://standards.iteh.ai>)

Document Preview

[ISO 17089-2:2012](#)

<https://standards.iteh.ai/catalog/standards/iso/ce45939e-0655-4088-a83f-3c9c577587c3/iso-17089-2-2012>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms, definitions, and symbols	1
3.1 Terms and definitions	1
3.2 Symbols and subscripts	6
3.3 Abbreviations	7
4 Principles of measurement	7
4.1 Transit time ultrasonic meters	7
4.2 Flare or vent gas meters	8
4.3 Factors affecting performance	9
4.4 Description of generic types	9
4.5 Impact of pressure and temperature on the flowmeter geometry	14
4.6 USM measurement uncertainty determination	14
4.7 USM classification	14
5 Meter characteristics	15
5.1 Performance indications	15
5.2 Operating conditions	15
5.3 Meter body, materials, and construction	15
5.4 Connections	16
5.5 Dimensions	16
5.6 Ultrasonic ports	16
5.7 Pressure tapping	16
5.8 Anti-roll provision	16
5.9 Flow conditioner	17
5.10 Markings	17
5.11 Transducers	17
5.12 Electronics	17
5.13 Firmware and software	18
5.14 Inspection and verification functions	19
5.15 Operation and installation requirements	19
5.16 Installation requirements and flow profile considerations	21
5.17 Handling and transportation	22
6 Test and calibration	23
6.1 Flow test and calibration	23
6.2 Static testing for leakage and pressure	23
6.3 Dimensional measurements	23
6.4 Dynamic testing (testing and calibration, adjustment under flowing conditions)	25
6.5 Meter diagnostics	26
6.6 In situ verification	27
Annex A (normative) Special application note on valve characterization and noise	29
Bibliography	36

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17089-2 was prepared by Technical Committee ISO/TC 30, *Measurement of fluid flow in closed conduits*, Subcommittee SC 5, *Velocity and mass methods*.

ISO 17089 consists of the following parts, under the general title *Measurement of fluid flow in closed conduits — Ultrasonic meters for gas*:

- *Part 1: Meters for custody transfer and allocation measurement*
- *Part 2: Meters for industrial applications*

ITEH Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 17089-2:2012](#)

<https://standards.iteh.ai/catalog/standards/iso/ce45939e-0655-4088-a83f-3c9c577587c3/iso-17089-2-2012>

Introduction

Ultrasonic meters (USMs) for gas flow measurement have penetrated the market for meters rapidly since 2000 and have become one of the prime flowmeter concepts for operational use as well as custody transfer and allocation measurement. As well as offering high repeatability and high accuracy, ultrasonic technology has inherent features like: negligible pressure loss, high rangeability and the capability to handle pulsating flows.

USMs can deliver extended diagnostic information through which it may be possible to verify not only the functionality of a USM, but also several other components within the system, such as the gas chromatograph, and the pressure and temperature transmitters. Due to the extended diagnostic capabilities, this part of ISO 17089 advocates the addition and use of automated diagnostics instead of labour-intensive quality checks.

This part of ISO 17089 focuses on meters for industrial gas applications (class 3 and class 4). Meters for custody transfer and allocation measurement are the subject of ISO 17089-1.

Typical performance factors of the classification scheme are:

Class	Typical applications	Typical uncertainty 95 % confidence level (volume flow rate) ^a	Reference
1	Custody transfer	±0,7 %	ISO 17089-1
2	Allocation	±1,5 %	ISO 17089-1
3	Utilities and process	±1,5 % to 5 % for $q_V > q_{V, t}$ ^b	This part of ISO 17089
4	Flare gas and vent gas	±5 % to 10 % for $q_V > q_{V, t}$	This part of ISO 17089

^aMeter performance, inclusive of total meter uncertainty, repeatability, resolution and maximum peak-to-peak error, depends upon a number of factors which include pipe inside diameter, acoustic path length, number of acoustic paths, gas composition and speed of sound, as well as meter timing repeatability.

^bBy specific flow conditioning or when multi-path meters are employed, lower uncertainties may be achieved.

The special application note(s) as presented in Clause 7 as well as information in parentheses are informative.
<https://standards.iteh.ai/catalog/standards/iso/ce45939e-0655-4088-a83f-3c9c577587c3/iso-17089-2-2012>

Measurement of fluid flow in closed conduits — Ultrasonic meters for gas —

Part 2: Meters for industrial applications

IMPORTANT — The electronic file of this document contains colours which are considered to be useful for the correct understanding of the document. Users should therefore consider printing this document using a colour printer.

1 Scope

This part of ISO 17089 specifies requirements and recommendations for ultrasonic gas meters (USMs), which utilize acoustic signals to measure the flow in the gaseous phase in closed conduits.

This part of ISO 17089 is applicable to transit time USMs and is focused towards industrial flow measurement. Included are meters comprising meter bodies as well as meters with field-mounted transducers.

There are no limits on the size of the meter. It can be applied to the measurement of almost any type of gas; such as but not limited to air, hydrocarbon gases, and steam.

This part of ISO 17089 specifies performance, calibration (when required), and output characteristics of USMs for gas flow measurement and deals with installation conditions.

NOTE It is possible that national or other regulations apply which can be more stringent than those in this part of ISO 17089.

2 Normative references

[ISO 17089-2:2012](#)

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4006, *Measurement of fluid flow in closed conduits — Vocabulary and symbols*

3 Terms, definitions, and symbols

3.1 Terms and definitions

3.1.1 General

For the purposes of this document, the terms and definitions given in ISO 4006 and the following apply.

3.1.2 Quantities

3.1.2.1

volume flow rate

q_V

$$q_V = \frac{dV}{dt}$$

where

V is volume;

t is time.

NOTE Adapted from ISO 80000-4:2006,^[8] 4-30.

3.1.2.1.1

actual flow rate

volume of fluid per time at metering conditions

3.1.2.1.2

corrected flow rate

volume of fluid per time measured at metering conditions, but converted to equivalent volume at base conditions

3.1.2.2

indication

flow rate indicated by the meter

3.1.2.3

working range

set of values of quantities of the same kind that can be measured by a given measuring instrument or measuring system with specified instrumental uncertainty, under defined conditions

NOTE 1 Adapted from ISO/IEC Guide 99:2007,^[10] 4.7, "working interval".

NOTE 2 For the purposes of this part of ISO 17089, the "set of values of quantities of the same kind" are volume flow rates whose values are bounded by a maximum flow rate, q_V, max , and a minimum flow rate, q_V, min ; the "given measuring instrument" is a meter.

NOTE 3 The terms "rangeability" and "turndown" can often be found in flowmeter data sheets in connection with the working range of the meter. These terms are sometimes used interchangeably although their exact meanings are different and may not mean the same as working range. For example, it is possible to find a stated flowmeter rangeability derived from the highest measurable flow divided by the minimum measurable flow (typically with flow expressed in terms of flow velocity).

3.1.2.4

metering pressure

[ISO 17089-2:2012](#)

p <https://standards.iteh.ai/catalog/standards/iso/ce45939e-0655-4088-a83f-3c9c577587c3/iso-17089-2-2012>
absolute gas pressure in a meter at flowing conditions to which the indicated volume of gas is related

3.1.2.5

average velocity

v

volume flow rate divided by the cross-sectional area

3.1.3 Meter design

3.1.3.1

meter body

pressure-containing structure of the meter

3.1.3.2

acoustic path

path travelled by an acoustic wave between a pair of ultrasonic transducers

3.1.3.3

axial path

path travelled by an acoustic wave entirely in the direction of the main pipe axis

NOTE An axial path can be both on or parallel to the centre-line or long axis of the pipe.

See Figure 1.

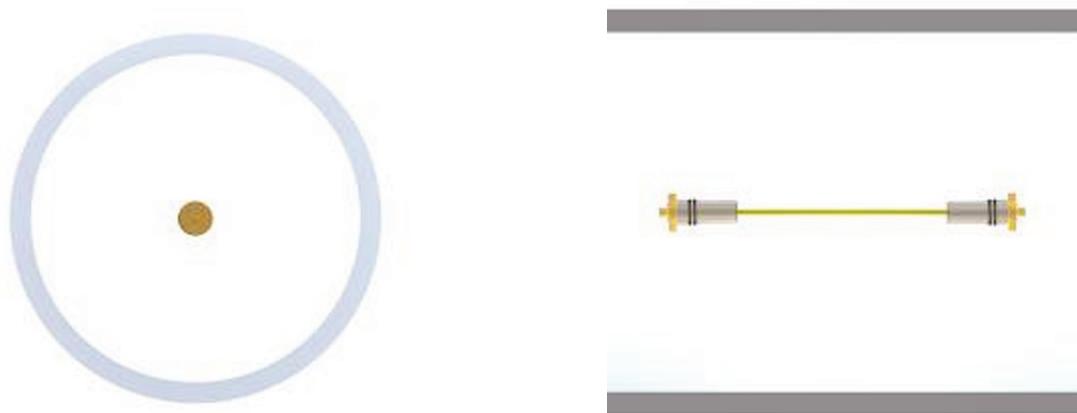


Figure 1 — Axial path

**3.1.3.4
diametrical path**

acoustic path whereby the acoustic wave travels through the centre-line or long axis of the pipe

See Figure 2.

**iTeh Standards
(<https://standards.iteh.ai>)
Document Preview**



Figure 2 — Diametrical paths

**3.1.3.5
chordal path**

acoustic path whereby the acoustic wave travels parallel to the diametrical path

See Figure 3.

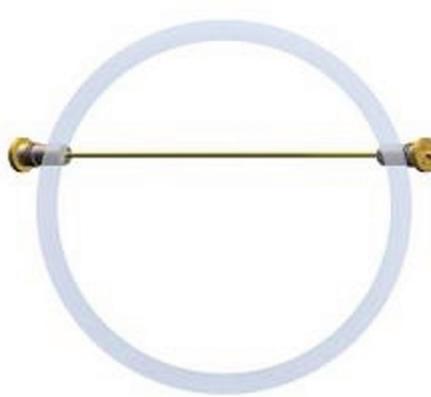


Figure 3 — Chordal paths

3.1.4 Thermodynamic conditions

3.1.4.1

metering conditions

conditions, at the point of measurement, of the fluid whose volume is to be measured

NOTE 1 Metering conditions include gas composition, temperature, and pressure also known as uncorrected conditions.

NOTE 2 Adapted from ISO 9951:1993,^[5] 3.1.6.

3.1.4.2

base conditions

conditions to which the measured volume of the gas is converted

NOTE 1 Base conditions include base temperature and base pressure.

<https://standards.iteh.ai/iso-17089-2-2012>

NOTE 2 Adapted from ISO 9951:1993,^[5] 3.1.7.

NOTE 3 Preferred alternatives include reference conditions, standard conditions, normal conditions.

NOTE 4 Metering and base conditions relate only to the volume of the gas to be measured or indicated, and should not be confused with rated operating conditions and reference operating conditions (see ISO/IEC Guide 99:2007,^[10] 4.9 and 4.11), which refer to influence quantities (see ISO/IEC Guide 99:2007,^[10] 2.52).

3.1.4.3

specified conditions

conditions of the fluid at which performance specifications of the meter are given

NOTE Adapted from ISO 9951:1993,^[5] 3.1.8.

3.1.5 Statistics

3.1.5.1

measurement error

error of measurement

error

measured quantity value minus a reference quantity value

[ISO/IEC Guide 99:2007,^[10] 2.16]

EXAMPLE Difference between the indication of the meter under test and the indication of the reference measurement.

3.1.5.2**error curve**

interconnection of the curve (e.g. polynomial) fitted to a set of error data as a function of the flow rate of the reference meter

3.1.5.3**maximum peak-to-peak error**

maximum difference between any two error values

3.1.5.4**repeatability**

measurement precision under a set of repeatability conditions of measurement

[ISO/IEC Guide 99:2007,^[10] 2.21]

EXAMPLE The closeness of agreement among a number of consecutive measurements of the output of the test meter for the same reference flow rate under the same metering conditions.

NOTE The repeatability corresponds to the 95 % confidence interval of the error.

3.1.5.5**resolution**

smallest difference between indications of a meter that can be meaningfully distinguished

NOTE Adapted from ISO 11631:1998,^[6] 3.28.

3.1.5.6**velocity sampling interval**

time interval between two consecutive gas velocity measurements

3.1.5.7**zero flow reading**

flowmeter indication when the gas is at rest, when both axial and non-axial velocity components are essentially zero

Figure 4 shows the flow rates in relation to the uncertainty budget.

<https://standards.iteh.ai/catalog/standards/iso/ce45939e-0655-4088-a83f-3c9c577587c3/iso-17089-2-2012>

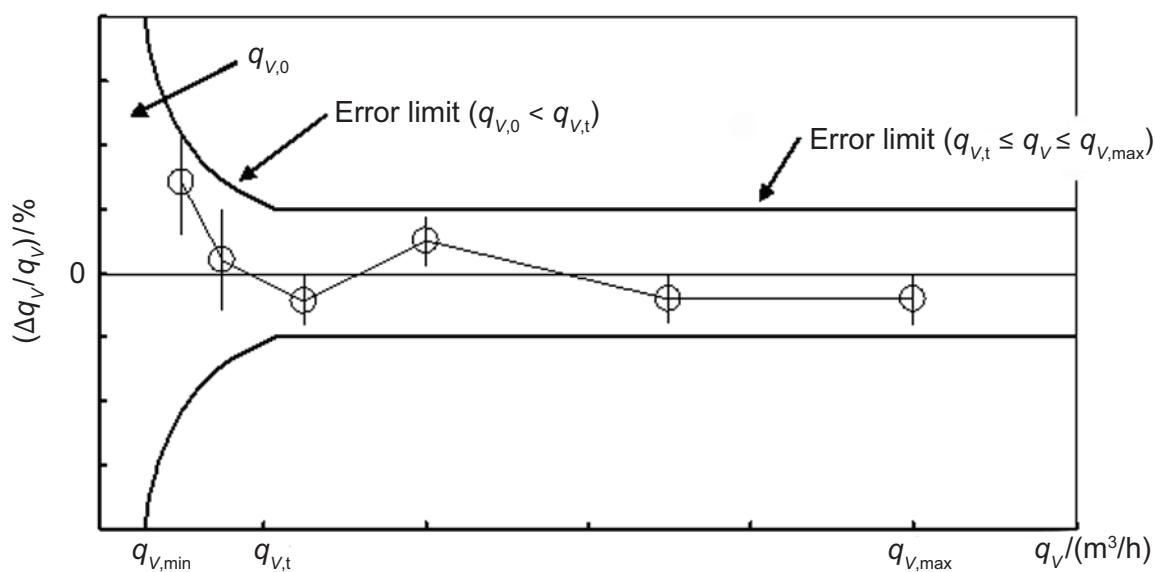


Figure 4 — Typical error curve as function of the flow rate

3.2 Symbols and subscripts

The symbols and subscripts used in this part of ISO 17089 are given in Tables 1 and 2. Examples of uses of the volume flow rate symbol are given in Table 3.

Table 1 — Symbols

Quantity	Symbol	Dimensions ^a	SI unit
Cross-sectional area	A	L^2	m^2
Speed of sound in fluid	c	LT^{-1}	m/s
Inside diameter of the meter body	D	L	m
Weighting factors (live inputs)	f_i	1^b	—
Integers (1,2,3, ...)	i, n	1^b	—
Calibration factor	K	1^b	—
Flow profile correction factor	k_n	1^b	—
Valve noise	$L_{p,N,V}$	1^b	dB
Path length	l_p	L	m
Attenuation factor	N_d	1^b	—
Valve weighting factor	N_v	1^b	—
Number of samples used in the signal processing.	n_s	1^b	—
Absolute pressure	p	$ML^{-1}T^{-2}$	Pa
Emitted acoustic pressure	p_n	$ML^{-1}T^{-2}$	Pa
Pressure difference	Δp	$ML^{-1}T^{-2}$	Pa
Mass flow rate	q_m	MT^{-1}	kg/s
Volume flow rate	q_V	L^3T^{-1}	m^3/s
Transit time	t	T	s
Average velocity	v	LT^{-1}	m/s
Velocity of the acoustical path i	v_i	LT^{-1}	m/s
Weighting factors (fixed value)	w_i	1^b	—
Path angle	ϕ	—	rad
Density of the fluid	ρ	ML^{-3}	kg/m^3

^aM = mass; L = length; T = time ; Θ = temperature.

^b“Dimensionless” quantity.

Table 2 — Subscripts

Subscript	Meaning
min	minimum
max	maximum
t	transition

Table 3 — Examples of flow rate symbols

Symbol	Meaning
q_V, max	Designed maximum flow rate
q_V, min	Designed minimum flow rate
q_V, t	Transition flow rate for defining accuracy requirements