

SLOVENSKI STANDARD
SIST EN 302 217-2-2 V2.2.1:2014
01-junij-2014

Fiksni radijski sistemi - Karakteristike in zahteve za opremo in antene tipa točka-točka - 2-2. del: Digitalni sistemi, ki delujejo v frekvenčnih pasovih, kjer je izvedena frekvenčna koordinacija - Harmonizirani EN, ki zajema bistvene zahteve člena 3.2 direktive R&TTE

Fixed Radio Systems - Characteristics and requirements for point-to-point equipment and antennas - Part 2-2: Digital systems operating in frequency bands where frequency co-ordination is applied - Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive

(standards.iteh.ai)

[SIST EN 302 217-2-2 V2.2.1:2014
https://standards.iteh.ai/catalog/standards/sist/aaf8ecea-5b65-46f1-9a18-48cfb5b0cbee/sist-en-302-217-2-2-v2-2-1-2014](https://standards.iteh.ai/catalog/standards/sist/aaf8ecea-5b65-46f1-9a18-48cfb5b0cbee/sist-en-302-217-2-2-v2-2-1-2014)

Ta slovenski standard je istoveten z: EN 302 217-2-2 Version 2.2.1

ICS:

33.060.30	Radiorelejni in fiksni satelitski komunikacijski sistemi	Radio relay and fixed satellite communications systems
33.120.40	Antene	Aerials

SIST EN 302 217-2-2 V2.2.1:2014 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 302 217-2-2 V2.2.1:2014](https://standards.iteh.ai/catalog/standards/sist/aaf8ecea-5b65-46f1-9a18-48cfb5b0cbee/sist-en-302-217-2-2-v2-2-1-2014)

<https://standards.iteh.ai/catalog/standards/sist/aaf8ecea-5b65-46f1-9a18-48cfb5b0cbee/sist-en-302-217-2-2-v2-2-1-2014>

ETSI EN 302 217-2-2 V2.2.1 (2014-04)



Harmonized European Standard

**Fixed Radio Systems;
Characteristics and requirements for
point-to-point equipment and antennas;
Part 2-2: Digital systems operating in frequency bands where
frequency co-ordination is applied;
Harmonized EN covering the essential requirements
of article 3.2 of the R&TTE Directive**

Reference

REN/ATTM-04025

Keywords

antenna, DFRS, digital, DRRS, FWA, point-to-point, radio, regulation, transmission

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88**iTeh STANDARD PREVIEW**
(standards.iteh.ai)SIST EN 302 217-2-2 V2.2.1:2014<https://standards.iteh.ai/catalog/standards/sist/aaf8ecea-5b65-46f1-9a18-48cfb5b0cbce/etsi-en-302-217-2-2-v2-2-1-2014>
Important notice

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	7
Foreword.....	7
Introduction	7
1 Scope	8
1.1 General background	8
1.2 Spectral efficiency classes	8
1.3 System alternatives	9
1.4 Channel arrangements and utilization	10
1.5 Payload flexibility	10
1.6 Document structure	11
2 References	11
2.1 Normative references	12
2.2 Informative references	12
3 Definitions, symbols and abbreviations	16
3.1 Definitions	16
3.2 Symbols	16
3.3 Abbreviations	16
4 Technical requirements specifications	16
4.0 System identification and traffic loading	16
4.1 Environmental profile	17
4.2 Transmitter requirements	18
4.2.1 Transmitter power and power tolerance	18
4.2.1.1 Maximum power	18
4.2.1.2 Transmitter power tolerance	18
4.2.2 Transmitter power and frequency control	19
4.2.2.1 Transmitter Power Control (ATPC and RTPC)	19
4.2.2.1.1 Automatic Transmit Power Control (ATPC)	19
4.2.2.1.2 Remote Transmit Power Control (RTPC)	19
4.2.2.2 Remote Frequency Control (RFC)	19
4.2.3 Void	19
4.2.4 Radio Frequency (RF) spectrum mask	20
4.2.4.1 Limits background	20
4.2.4.2 Limits	23
4.2.4.2.1 Unified masks	23
4.2.4.2.2 Other alternative and system specific masks options	35
4.2.5 Discrete CW components exceeding the spectrum mask limit	35
4.2.5.1 Discrete CW components at the symbol rate	35
4.2.5.2 Other discrete CW components exceeding the spectrum mask limit	35
4.2.6 Spurious emissions - external	37
4.2.7 Dynamic Change of Modulation Order	37
4.2.8 Radio frequency tolerance	37
4.3 Receiver requirements	37
4.3.1 Spurious emissions - external	38
4.3.2 BER as a function of receiver input signal level RSL	38
4.3.3 Co-channel "external" and adjacent channel interference sensitivity	38
4.3.4 CW spurious interference	39
4.4 Antenna directional requirements	39
4.4.1 Radiation Pattern Envelope (Off-axis EIRP density)	40
4.4.2 Antenna gain	40
4.4.3 Antenna Cross-Polar Discrimination (XPD)	40
5 Testing for compliance with technical requirements	40
5.1 Environmental and other conditions for testing	40
5.1.1 Environmental conditions	40

5.1.2	Test interpretation and measurement uncertainty	40
5.1.3	Other basic conditions	41
5.2	Essential radio test suites for the transmitter	41
5.2.1	Transmitter power and power tolerance.....	42
5.2.2	Transmitter power and frequency control.....	43
5.2.2.1	Transmitter Power Control (ATPC and RTPC)	43
5.2.2.1.1	ATPC.....	43
5.2.2.1.2	RTPC.....	43
5.2.2.1.3	Remote Frequency Control (RFC).....	43
5.2.3	Void	43
5.2.4	RF spectrum mask	43
5.2.5	Discrete CW components exceeding the spectrum mask limit	44
5.2.6	Spurious emissions - external	44
5.2.7	Dynamic Change of Modulation Order	44
5.2.8	Radio frequency tolerance	44
5.3	Essential radio test suites for the receiver	45
5.3.1	Spurious emissions - external	45
5.3.2	BER as a function of receiver input signal level (RSL).....	46
5.3.3	Co-channel "external" and adjacent channel interference sensitivity	46
5.3.4	CW spurious interference	46
5.4	Additional essential antenna test suites for systems with integral antenna.....	46
5.4.1	Radiation Pattern Envelope (Off-axis EIRP density).....	46
5.4.2	Antenna gain.....	46
5.4.3	Antenna Cross-Polar Discrimination (XPD).....	46
Annex A (normative): Frequency bands from 1,4 GHz to 2,7 GHz		47
A.1	Introduction	47
A.2	General characteristics	47
A.2.1	Frequency characteristics and channel arrangements	47
A.2.2	Transmission capacities.....	48
A.3	Transmitter	48
A.3.1	General requirements	48
A.3.2	RF spectrum masks options.....	49
A.4	Receiver.....	49
A.4.1	General requirements	49
A.4.2	BER as a function of receiver input signal level (RSL)	50
A.4.3	Co-channel "external" and adjacent channels interference sensitivity	50
Annex B (normative): Frequency bands from 3 GHz to 11 GHz (channel separation up to 30 MHz and 56/60 MHz)		52
B.1	Introduction	52
B.2	General characteristics	52
B.2.1	Frequency characteristics and channel arrangements.....	52
B.2.2	Transmission capacities.....	53
B.3	Transmitter	54
B.3.1	General requirements	54
B.3.2	RF spectrum masks options.....	54
B.4	Receiver.....	55
B.4.1	General requirements	55
B.4.2	BER as a function of Receiver input Signal Level (RSL)	55
B.4.3	Co-channel "external" and adjacent channel interference sensitivity	57
Annex C (normative): Frequency bands from 3 GHz to 11 GHz (channel separation 40 MHz)		58
C.1	Introduction	58
C.2	General characteristics	58

C.2.1	Frequency characteristics and channel arrangements	58
C.2.2	Transmission capacities	58
C.3	Transmitter	59
C.3.1	General requirements	59
C.3.2	RF spectrum masks	59
C.4	Receiver	60
C.4.1	General requirements	60
C.4.2	BER as a function of Receiver input Signal Level (RSL)	60
C.4.3	Co-channel "external" and adjacent channel interference sensitivity	61
Annex D (normative): Frequency bands 13 GHz, 15 GHz and 18 GHz.....		62
D.1	Introduction	62
D.2	General characteristics	62
D.2.1	Frequency characteristics and channel arrangements	62
D.2.2	Transmission capacities	63
D.3	Transmitter	63
D.3.1	General requirements	63
D.3.2	RF spectrum masks options	64
D.4	Receiver	65
D.4.1	General requirements	65
D.4.2	BER as a function of Receiver input Signal Level (RSL)	65
D.4.3	Co-channel "external" and adjacent channel interference sensitivity	67
Annex E (normative): Frequency bands from 23 GHz to 55 GHz		69
E.1	Introduction	69
E.2	General characteristics	69
E.2.1	Frequency characteristics and channel arrangements	69
E.2.2	Transmission capacities	70
E.3	Transmitter	70
E.3.1	General requirements	70
E.3.2	RF spectrum masks options	71
E.3.2.1	Frequency bands 23 GHz to 42 GHz	71
E.3.2.2	Frequency bands 50 GHz to 55 GHz	72
E.4	Receiver	72
E.4.1	General requirements	72
E.4.2	BER as a function of Receiver input Signal Level (RSL)	73
E.4.2.1	Systems in bands from 23 GHz to 42 GHz	74
E.4.2.2	Systems in bands from 50 GHz to 55 GHz	76
E.4.3	Co-channel "external" and adjacent channel interference sensitivity	77
Annex Ea (normative): Frequency bands from 71 GHz to 86 GHz		78
Ea.1	Introduction	78
Ea.2	General characteristics	78
Ea.2.1	Frequency characteristics and channel arrangements	78
Ea.2.2	Transmission capacities	79
Ea.3	Transmitter	80
Ea.3.1	General requirements	80
Ea.3.2	RF spectrum masks	80
Ea.4	Receiver	80
Ea.4.1	General requirements	80
Ea.4.2	BER as a function of Receiver input Signal Level (RSL)	80
Ea.4.3	Co-channel "external" and adjacent channel interference sensitivity	82

Annex F (normative):	Definition of equivalent data rates for packet data, PDH/SDH and other signals on the traffic interface.....	84
F.1	Introduction	84
F.2	General characteristics	84
F.2.1	Frequency characteristics and channel arrangements	84
F.2.2	Transmission capacities	84
F.3	System parameters.....	87
F.3.1	Transmitter	87
F.3.2	Receiver.....	87
F.3.3	FER as a function of BER	87
Annex G (normative):	Test report in relation to flexible systems applications	89
G.1	Wide radio-frequency band covering units	89
G.2	Multirate/multiformat equipment	91
G.2.1	Generic required tests in the test report	91
G.2.2	Reduced required tests in the test report.....	91
G.2.2.1	Reduced transmitter tests	91
G.2.2.2	Reduced receiver tests	92
G.2.3	Bandwidth adaptive test set requirements	93
G.3	BER measurement in a SDH or Ethernet multi-interfaces, multi-channels system	93
G.3.1	Case 1: multi-interfaces/single channel or multi-interfaces/two-channels systems where each interface payload is transmitted on one channel only.....	94
G.3.2	Case 2: single interface/two-channels system	94
G.3.3	Case 3: multi-interfaces/two-channels system where each payload interface is transmitted on both channels.....	94
Annex H (normative):	HS Requirements and conformance Test specifications Table (HS-RTT).....	95
Annex I (informative):	Impact of power control (ATPC and/or RTPC), mixed-mode and bandwidth adaptive operation on spectrum mask and link design requirements.....	97
I.0	General Background for, ATPC, RTPC and mixed mode operation	97
I.1	ATPC and RTPC implementation background	97
I.2	Mixed-mode operation impact	99
I.2.1	Basic concepts	99
I.3	Bandwidth adaptive operation impact.....	100
I.3.1	Basic concepts	100
I.3.2	Bandwidth (channel) occupancy	100
I.4	Impact on frequency co-ordination	100
I.5	Impact on article 3.2 "essential" parameters and operating conditions	102
Annex J (informative):	Typical interference sensitivity behaviour for frequency planning purpose.....	104
Annex K (informative):	Bibliography.....	105
Annex L (informative):	Change History	106
History		107

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (EN) has been produced by ETSI Technical Committee Access, Terminals, Transmission and Multiplexing (ATTM).

The present document has been produced by ETSI in response to mandate M/284 issued from the European Commission under Directive 98/34/EC [i.2] as amended by Directive 98/48/EC [i.64].

The title and reference to the present document are intended to be included in the publication in the Official Journal of the European Union of titles and references of Harmonized Standard under the Directive 1999/5/EC [1].

See article 5.1 of Directive 1999/5/EC [1] for information on presumption of conformity and Harmonized Standards or parts thereof the references of which have been published in the Official Journal of the European Union.

The requirements relevant to Directive 1999/5/EC [1] are summarized in annex H.

The present document is part 2, sub-part 2 of a multi-part deliverable covering Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas. Full details of the entire series can be found in part 1 [6].

National transposition dates

Date of adoption of this EN:	26 March 2014
Date of latest announcement of this EN (doa):	30 June 2014
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 December 2014
Date of withdrawal of any conflicting National Standard (dow):	31 December 2015

Introduction

The EN 302 217 series has been produced in order to rationalize a large number of previous ETSI ENs dealing with equipment and antennas for Point-to-Point (P-P) Fixed Service applications. For more details, see foreword in the EN 302 217-1 [6].

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [1]. The modular structure is described in EG 201 399 [i.24].

Figure 1: Void

1 Scope

1.1 General background

The present document specifies the essential requirements for point-to-point Digital Fixed Radio Systems (DFRS) operating in frequency division full duplex (FDD) in frequency bands, where co-ordinated link-by-link frequency planning is applied. It is intended to cover the provisions of the R&TTE Directive [1] regarding article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] will apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org>.

For the correct understanding and application of the requirements in the present document, the definitions summarized in EN 302 217-1 [6] are also relevant.

1.2 Spectral efficiency classes

As the maximum transmission rate in a given bandwidth depends on system spectral efficiency, different equipment classes are here defined. They are based on typical modulation formats and limited by a "minimum Radio Interface Capacity density" (Mbit/s/MHz) shown in table 0. Radio Interface Capacity (RIC) is defined in EN 302 217-1 [6].

The minimum RIC density figures in table 0 are valid only for systems operating on the most common channel separation (CS) equal or higher than 1,75 MHz and taking into account that for channel separations "about" 14 MHz (i.e. from 13,75 MHz to 15,0 MHz), "about" 28 MHz (i.e. from 27,5 MHz to 30 MHz), "about" 56 MHz (i.e. from 55 MHz to 60 MHz) and "about" 112 MHz (i.e. 110 MHz or 112 MHz) the RIC density of actual systems is evaluated only over the "nominal" 14 MHz, 28 MHz, 56 MHz and 112 MHz channel width.

Minimum RIC figures for some systems operating on 40 MHz channel separation, with RIC density lower than the minimum requirement in table 0, are defined only in annexes C and Ea. For the special cases of sub-STM-0 capacities (defined in Recommendation ITU-T G.708 [i.63], annex D), alternative minimum RIC figures are not defined.

Table 0: Spectral efficiency classes and their minimum RIC density

Reference modulation index	Spectral efficiency class	Minimum RIC density (Mbit/s/MHz) (see note)	Description
1	1	0,57	Equipment with spectral efficiency based on typical 2-states modulation scheme (e.g. 2FSK, 2PSK)
2	2	1,14	Equipment with spectral efficiency based on typical 4-states modulation scheme (e.g. 4FSK, 4QAM)
3	3	1,7	Equipment with spectral efficiency based on typical 8-states modulation scheme (e.g. 8PSK)
4	4L	2,28	Equipment with spectral efficiency based on typical 16-states modulation scheme (e.g. 16QAM, 16APSK)
5	4H	3,5	Equipment with spectral efficiency based on typical 32-states modulation scheme (e.g. 32QAM, 32APSK)
6	5L	4,2	Equipment with spectral efficiency based on typical 64-states modulation scheme (e.g. 64QAM)
7	5H	4,9	Equipment with spectral efficiency based on typical 128-states modulation scheme (e.g. 128QAM)
8	6L	5,6	Equipment with spectral efficiency based on typical 256-states modulation scheme (e.g. 256QAM)
9	6H	6,3	Equipment with spectral efficiency based on typical 512-states modulation scheme (e.g. 512QAM)
10	7	7	Equipment with spectral efficiency based on typical 1 024-states modulation scheme (e.g. 1024QAM)
11	8	7,7	Equipment with spectral efficiency based on typical 2 048-states modulation scheme (e.g. 2048QAM)

NOTE: When defining the minimum RIC for actual channel separations, for simplicity, it will be rounded to the suitably closer integer Mbit/s.

(standards.iteh.ai)

All classes up to class 4H, for any CS, and classes 5L, 5H, 6L, 6H, 7 and 8, for CS < 27,5 MHz, are intended suitable for ACCP operation and, in principle, whenever appropriate, also expandable to CCDP. Classes 5L, 5H, 6L, 6H, 7 and 8, only for CS ≥ 27,5 MHz, are further subdivided in two sub-classes:

- subClass A: classes 5LA, 5HA, 6LA, 6HA, 7A and 8A are intended suitable, on the same route, for cross-polar adjacent channel (ACAP) operation only (see figure 2a).
- subClass B: classes 5LB, 5HB, 6LB, 6HB, 7B and 8B are suitable, on the same route, for ACCP operation and, in principle, whenever appropriate, also expandable to CCDP (see figure 2a).

The above classes are for system identification only and will not imply any constraint to the actual modulation format, provided that all the requirements of the selected class in the relevant parts of EN 302 217 series are met.

1.3 System alternatives

In order to (technically) cover different market and network requirements, with an appropriate balance of performance to cost and effective and appropriate use of the radio spectrum, the present document, together with EN 302 217-4-2 [8], offers a number of system types and antennas alternatives, for selection by administrations, operators and manufacturers dependent on the desired use of the radio spectrum and network/market requirements; those options include:

- channel separation alternatives (as provided by the relevant CEPT or Recommendation ITU-R);
- spectral efficiency class alternatives (different modulation formats provided in radio equipment standards) as defined in clause 1.2; actual equipment may operate within one spectral efficiency class only (*Single-mode*) or within multiple classes, either with static pre-selection of the class (*Preset-mode*) or with dynamic variation of capacity according the propagation conditions (*Mixed-mode*) (see note);
- antenna directivity class alternatives (for different network requirements).

NOTE: *Single-mode*, *Preset-mode* and *Mixed-mode* systems are defined in clause 3.1 of EN 302 217-1 [6]; additional information on *Mixed-mode* systems may be found in annex I of the present document and in TR 103 103 [i.35].

1.4 Channel arrangements and utilization

Systems in the scope of the present document are intended to operate only in full frequency division duplex (FDD). Time division duplex (TDD) applications are not in the scope of the present document.

Unidirectional systems are assumed to be an underequipped FDD system.

From the point of view of the transmission capacity, these systems are defined, in the relevant annexes, on the basis of their minimum Channel Separation (CS) on the same route, for a given spectral efficiency class, taken into account by the system design. The possible channel arrangements may be:

- Adjacent Channel Alternate-Polarized (ACAP);
- Adjacent Channel Co-Polarized (ACCP);
- Co-Channel Dual-Polarization (CCDP).

These possible applications and their channel arrangements are shown in figure 2a.

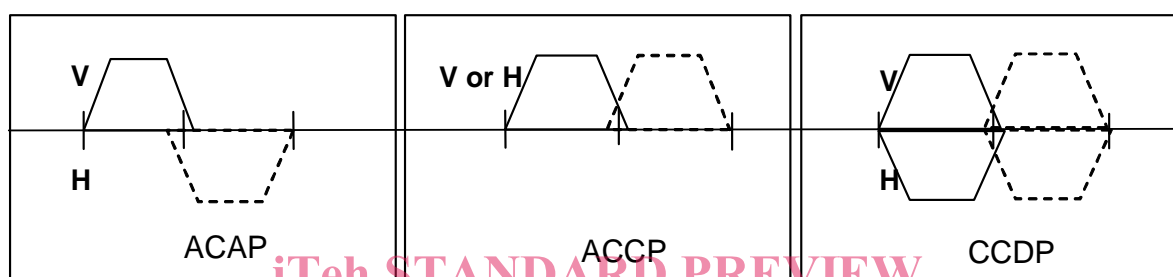


Figure 2a: Examples of channel arrangements on the same route

1.5 Payload flexibility

For quick identification of the system, the capacities in tables X.2 (where X = A, B, C, D, E, Ea represents the relevant annex) are the minimum transmitted RIC required for conformance to the present document; they are based on the "minimum RIC density" defined in clause 1.2. Only some cases of systems in annex A, due to the smaller channel separation provided, are (exceptionally) labelled with typical *gross bit rate* rather than minimum RIC capacity rates.

However, equipment may offer a variety of base band interfaces, e.g. typical hierarchical rates PDH or SDH, ISDN, Ethernet as well as mixture of these or other standardized interfaces. Mapping/multiplexing of the various base-band interfaces into common frame(s) suitable for radio transmission may be done using standardized higher hierarchical frames or other proprietary methods.

NOTE: Information on applicable base-band interfaces can be found in EN 302 217-1 [6].

Tables F.1a through F.1g in annex F summarize the "minimum RIC" considered in the present document and, when only PDH or SDH interfaces are provided, give the equivalent capacity in term of number of 2,048 Mbit/s streams provided as multiple or single multiplexed PDH or SDH interfaces. These minimum capacities will be associated to the relevant channel separation and spectral efficiency classes defined.

Equipment may operate with one single RIC payload rate or with multiple RIC payload rates (multirate systems), either statically preset (possibly coupled also with *preset-mode* operation) or, when coupled with *mixed-mode* operation, dynamically changing according to the modulation format.

The requirements of the present document apply separately to each transmitter/receiver or single transmitters or receivers used for combining complex or simple (e.g. space diversity receivers or single transmitters and receivers used for unidirectional links) fixed radio systems. Systems carrying $N \times \text{STM-1}$ ($N = 1, 2$) capacity might actually be aggregated for carrying STM-4 in more than one radio frequency channel, provided that each equipment for each channel meets the channel requirements (see clause G.3). When frequency reuse (e.g. dual polarization reuse or other frequency reuse techniques) is applied, the requirements apply independently to each transmitter/receiver; the different interference potential of frequency reuse will be dealt with in the frequency planning associated with the licensing process.

1.6 Document structure

The present document is mainly intended to cover fixed radio equipment without integral antennas. However, it also applies to fixed radio systems products with integral antennas, for which all the technical requirements included in the present document and in EN 302 217-4-2 [8] apply. For more background information on the equipment and antenna parameters here identified as relevant to article 3.2 of R&TTE Directive [1] see EG 201 399 [i.24] and TR 101 506 [i.30].

For simplicity, the point-to-point systems refer to a number of technical requirements, common to all bands, which are described in the main body of the present document, while frequency dependent requirements are split into separate annexes, with respect to ranges of frequency bands and channel separations, into the following families which may include a range of corresponding payload rates for covering various applications requested by the market:

- Annex A: Frequency bands from 1,4 GHz to 2,7 GHz:
Systems with channel separations ranging from 0,025 MHz to 14 MHz for indicative payloads capacity ranging from 0,0096 Mbit/s to 38 Mbit/s. See detailed summary in table A.2.
- Annex B: Frequency bands from 3 GHz to 11 GHz (channel separation up to 30 MHz and 56/60 MHz):
Systems with channel separations ranging from 1,75 MHz to 30 MHz and 56/60 MHz for minimum RIC payload rates ranging from 2 Mbit/s up to about 430 Mbit/s. See detailed summary in table B.2.
- Annex C: Frequency bands from 3 GHz to 11 GHz (channel separation 40 MHz):
Systems with channel separations 40 MHz for minimum RIC payload rates from about 137 Mbit/s to about 300 Mbit/s or hierarchic from STM-1 to $2 \times$ STM-1 (ACAP or ACCP) and STM-4/4 \times STM-1 for CCDP operation or spread over $2 \times$ 40 MHz channels). See detailed summary in table C.2.
- Annex D: Frequency bands 13 GHz, 15 GHz and 18 GHz:
Systems with channel separations ranging from 1,75 MHz to 55/56 MHz (or, for 18 GHz band only, up to 110 MHz) for minimum RIC payload rates ranging from 2 Mbit/s up to about 430 Mbit/s and up to 860 Mbit/s in 18 GHz band. See detailed summary in table D.2.
- Annex E: Frequency bands from 23 GHz to 55 GHz:
#For frequency bands 23 GHz to 42 GHz, systems with channel separations ranging from 3,5 MHz to 112 MHz for minimum RIC payload rates ranging from 2 Mbit/s up to about 860 Mbit/s. See detailed summary in table E.2.
#For frequency bands 50 GHz to 55 GHz, systems with channel separations ranging from 3,5 MHz to 56 MHz for minimum RIC payload rates ranging from 2 Mbit/s up to about 128 Mbit/s. See detailed summary in table E.2.
- Annex Ea: Frequency bands from 71 GHz to 76 GHz and 81 GHz to 86 GHz:
Systems with channel separation ranging from 250 MHz to 2 000 MHz for minimum RIC payload rates ranging from about 140 Mbit/s up to about 3 000 Mbit/s. See detailed summary in table Ea.2.

In those annexes further subdivision is made, as appropriate, according to frequency bands, capacities and/or channel separation (see table 3 of EN 302 217-1 [6]).

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] CEPT/ERC/REC 74-01 (01-2011): "Unwanted emissions in the spurious domain".
- [3] ETSI EN 301 126-1 (V1.1.2) (09-1999): "Fixed Radio Systems; Conformance testing; Part 1: Point-to-point equipment - Definitions, general requirements and test procedures".
- [4] ETSI EN 301 126-3-1 (V1.1.2) (12-2002): "Fixed Radio Systems; Conformance testing; Part 3-1: Point-to-Point antennas; Definitions, general requirements and test procedures".
- [5] ETSI EN 301 390 (V1.3.1) (08-2013): "Fixed Radio Systems; Point-to-point and Multipoint Systems; Unwanted emissions in the spurious domain and receiver immunity limits at equipment/antenna port of Digital Fixed Radio Systems".
- [6] ETSI EN 302 217-1 (V2.1.1) (07-2013): "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 1: Overview and system-independent common characteristics".
- [7] ETSI EN 302 217-3 (V2.2.1) (04-2014): "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 3: Equipment operating in frequency bands where both frequency coordinated or uncoordinated deployment might be applied; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".
- [8] ETSI EN 302 217-4-2 (V1.5.1) (01-2010): "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 4-2: Antennas; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".
- [9] IEEE 1802.3-2001: "IEEE Conformance Test Methodology for IEEE Standards for Local and Metropolitan Area Networks - Specific Requirements - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications".
- [10] IEEE 802.3-2005: "IEEE Standard for Information Technology - Telecommunications and Information Exchange Between Systems - Local and Metropolitan Area Networks - Specific Requirements - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications".
- [11] ITU Radio Regulations (2012).
- [12] Recommendation ITU-T O.151 (10-1992) / Corrigendum 1 (05-2002): "Error performance measuring equipment operating at the primary rate and above".
- [13] Recommendation ITU-T O.181 (05-2002): "Equipment to assess error performance on STM-N interfaces".
- [14] Recommendation ITU-T O.191 (02-2000): "Equipment to measure the cell transfer performance of ATM connections".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Void.
- [i.2] Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.

- [i.3] CEPT/ERC/REC(01)02 (2010): "Preferred channel arrangement for digital fixed service systems operating in the frequency band 31.8 - 33.4 GHz".
- [i.4] CEPT/ERC/REC 12-02 (2007): "Harmonized radio frequency channel arrangements for analogue and digital terrestrial fixed systems operating in the band 12.75 GHz to 13.25 GHz".
- [i.5] CEPT/ERC/REC 12-03: "Harmonized radio frequency channel arrangements for digital terrestrial fixed systems operating in the band 17.7 GHz to 19.7 GHz".
- [i.6] CEPT/ERC/REC 12-05 (2007): "Harmonized radio frequency channel arrangements for digital terrestrial fixed systems operating in the band 10.0 - 10.68 GHz".
- [i.7] CEPT/ERC/REC 12-06 (2010): "Harmonized radio frequency channel arrangements for digital terrestrial fixed systems operating in the band 10.7 GHz to 11.7 GHz".
- [i.8] CEPT/ERC/REC 12-07: "Harmonized radio frequency channel arrangements for digital terrestrial fixed systems operating in the band 14.5 - 14.62 GHz paired with 15.23 - 15.35 GHz".
- [i.9] CEPT/ERC/REC 12-08: "Harmonized radio frequency channel arrangements and block allocations for low, medium and high capacity systems in the band 3600 MHz to 4200 MHz".
- [i.10] CEPT/ERC/REC 12-10: "Harmonized radio frequency arrangements for digital systems operating in the band 48.5 GHz - 50.2 GHz".
- [i.11] CEPT/ERC/REC 12-11: "Radio frequency channel arrangement for fixed service systems operating in the band 51.4-52.6 GHz".
- [i.12] CEPT/ERC/REC 12-12 (2001): "Radio frequency channel arrangement for fixed service systems operating in the band 55.78-57.0 GHz".
- [i.13] CEPT/ERC/REC 14-01 (2007): "Radio frequency channel arrangements for high capacity analogue and digital radio-relay systems operating in the band 5925 MHz - 6425 MHz".
- [i.14] CEPT/ERC/REC 14-02 (2009): "Radio frequency channel arrangements for medium and high capacity analogue or high capacity digital radio-relay systems operating in the band 6425 MHz - 7125 MHz".
- [i.15] CEPT/ERC/REC 14-03: "Harmonized radio frequency channel arrangements for low and medium capacity systems in the band 3400 MHz to 3600 MHz".
- [i.16] CEPT/ERC/REC T/R 12-01 (2010): "Harmonized radio frequency channel arrangements for analogue and digital terrestrial fixed systems operating in the band 37-39.5 GHz".
- [i.17] CEPT/ERC/REC T/R 13-01 (2010): "Preferred channel arrangements for fixed services in the range 1-3 GHz".
- [i.18] CEPT/ERC/REC T/R 13-02 (2010): "Preferred channel arrangements for fixed services in the range 22.0 - 29.5 GHz".
- [i.19] ECC/REC(01)04 (2010): "Recommended guidelines for the accommodation and assignment of Fixed Multimedia Wireless Systems (MWS) and Point-to-point (P-P) Fixed Wireless Systems in the frequency band 40.5-43.5 GHz".
- [i.20] ECC/REC(01)05: "List of parameters of digital point-to-point fixed radio links used for national planning".
- [i.21] ECC/REC(02)02 (2010): "Channel arrangement for digital fixed service systems (point-to-point and point-to-multipoint) operating in the frequency band 31 - 31.3 GHz".
- [i.22] ECC/REC (02)06 (2011): "Preferred channel arrangements for digital fixed service systems operating in the frequency range 7125-8500 MHz".
- [i.23] ECC/REC(05)07 (2013): "Radio frequency channel arrangements for fixed service systems operating in the bands 71-76 GHz and 81-86 GHz".