



**SLOVENSKI STANDARD**  
**oSIST prEN 303 131 V1.1.0:2014**  
**01-december-2014**

---

**Elektromagnetna združljivost in zadeve v zvezi z radijskim spektrom (ERM) -  
Naprave kratkega dosega - Brezžični alarmi z majhnim delovnim ciklom -  
Harmonizirani EN, ki zajema bistvene zahteve člena 3.2 direktive R&TTE**

Electromagnetic compatibility and Radio spectrum Matters (ERM) - Short Range Devices  
- Wireless alarms with low duty cycle - Harmonized EN covering the essential  
requirements of article 3.2 of the R&TTE Directive

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-  
e867160a63f6/osist-pren-303-131-v1-1-0-2014](https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-e867160a63f6/osist-pren-303-131-v1-1-0-2014)

**Ta slovenski standard je istoveten z: EN 303 131 Version 1.1.0**

---

**ICS:**

13.320	Alarmni in opozorilni sistemi	Alarm and warning systems
33.060.99	Druga oprema za radijske komunikacije	Other equipment for radiocommunications
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

**oSIST prEN 303 131 V1.1.0:2014**                      **en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[oSIST prEN 303 131 V1.1.0:2014](https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-e867160a63fb/osist-pren-303-131-v1-1-0-2014)

<https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-e867160a63fb/osist-pren-303-131-v1-1-0-2014>

# Draft ETSI EN 303 131 V1.1.0 (2014-10)



**Electromagnetic compatibility  
and Radio spectrum Matters (ERM);  
Short Range Devices;  
Wireless alarms with low duty cycle;  
Harmonized EN covering the essential requirements  
of article 3.2 of the R&TTE Directive**

## Reference

---

DEN/ERM-TG28-499

## Keywords

---

alarm, reliability, SRD**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

oSIST prEN 303 131 V1.1.0:2014

<https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-e867160a6347/standards-303-131-v1-1-0-2014>  
**Important notice**

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaircor/ETSI\\_support.asp](http://portal.etsi.org/chaircor/ETSI_support.asp)

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**GSM®** and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Contents

Intellectual Property Rights .....	9
Foreword.....	9
Modal verbs terminology.....	9
Introduction .....	9
1 Scope .....	11
2 References .....	12
2.1 Normative references .....	12
2.2 Informative references.....	12
3 Definitions, symbols and abbreviations .....	13
3.1 Definitions.....	13
3.2 Symbols.....	15
3.3 Abbreviations .....	15
4 Technical requirements specifications .....	16
4.1 Environmental profile.....	16
4.2 Conformance requirements .....	16
4.2.1 Technical requirements for operation on Channelized frequencies .....	16
4.2.1.1 Applicability.....	16
4.2.1.2 Operating Frequency and Channel.....	17
4.2.1.2.1 Description .....	17
4.2.1.2.2 Limits .....	17
4.2.1.2.3 Conformance .....	17
4.2.1.3 Effective Radiated Power.....	17
4.2.1.3.1 Description .....	17
4.2.1.3.2 Limits .....	17
4.2.1.3.3 Conformance .....	17
4.2.1.4 Duty Cycle and short term behaviour .....	17
4.2.1.4.1 Description .....	17
4.2.1.4.2 Limits .....	18
4.2.1.4.3 Conformance .....	18
4.2.1.5 Adjacent Channel Power.....	18
4.2.1.5.1 Description .....	18
4.2.1.5.2 Limits .....	18
4.2.1.5.3 Conformance .....	19
4.2.2 Technical requirements for operation on Unchannelized frequencies .....	19
4.2.2.1 Applicability.....	19
4.2.2.2 Operating Frequency .....	19
4.2.2.2.1 Description .....	19
4.2.2.2.2 Limits .....	19
4.2.2.2.3 Conformance .....	19
4.2.2.3 Effective Radiated Power.....	20
4.2.2.3.1 Description .....	20
4.2.2.3.2 Limits .....	20
4.2.2.3.3 Conformance .....	20
4.2.2.4 Duty Cycle and short term behaviour .....	20
4.2.2.4.1 Description .....	20
4.2.2.4.2 Limits .....	20
4.2.2.4.3 Conformance .....	21
4.2.2.5 Adjacent Channel Power.....	21
4.2.2.5.1 Description .....	21
4.2.2.5.2 Limits for channel width $B \leq 25$ kHz .....	21
4.2.2.5.3 Limits for channel width $B > 25$ kHz .....	22
4.2.2.5.4 Conformance .....	22
4.2.3 Technical requirements for all equipment .....	22

4.2.3.1	Applicability.....	22
4.2.3.2	Transmitter Frequency Error .....	22
4.2.3.2.1	Description and Applicability.....	22
4.2.3.2.2	Limits .....	22
4.2.3.2.3	Conformance .....	22
4.2.3.3	Transmitter Transient Power .....	22
4.2.3.3.1	Description .....	22
4.2.3.3.2	Limits .....	23
4.2.3.3.3	Conformance .....	23
4.2.3.4	Spurious Emissions .....	23
4.2.3.4.1	Description .....	23
4.2.3.4.2	Limits .....	23
4.2.3.4.3	Conformance .....	23
4.2.3.5	Frequency Stability under Low Voltage Conditions .....	23
4.2.3.5.1	Description and Applicability.....	23
4.2.3.5.2	Limits .....	24
4.2.3.5.3	Conformance .....	24
4.2.4	Receiver Parameters .....	24
4.2.4.1	Applicability.....	24
4.2.4.2	Adjacent Channel Selectivity .....	24
4.2.4.2.1	Description .....	24
4.2.4.2.2	Limits .....	24
4.2.4.2.3	Conformance .....	24
4.2.4.3	Blocking.....	24
4.2.4.3.1	Description .....	24
4.2.4.3.2	Limits .....	24
4.2.4.3.3	Conformance .....	25
5	Technical Requirements for Uni-Directional Communication .....	25
5.1	Mode B Applicability and Conformance Requirements.....	25
5.2	Additional Conformance requirements .....	25
5.2.1	Void.....	25
5.2.2	Void.....	25
5.2.3	Transmitter Parameters.....	25
5.2.4	Receiver Parameters .....	25
5.2.4.1	Applicability.....	26
5.2.4.2	Adjacent Channel Selectivity .....	26
5.2.4.2.1	Description .....	26
5.2.4.2.2	Limits .....	26
5.2.4.2.3	Conformance .....	26
5.2.4.3	Blocking.....	26
5.2.4.3.1	Description .....	26
5.2.4.3.2	Limits .....	26
5.2.4.3.3	Conformance .....	26
5.2.4.4	Adjacent Channel Saturation.....	26
5.2.4.4.1	Description .....	26
5.2.4.4.2	Limits .....	26
5.2.4.4.3	Conformance .....	26
5.2.4.5	Spurious Response Rejection .....	27
5.2.4.5.1	Description .....	27
5.2.4.5.2	Limits .....	27
5.2.4.5.3	Conformance .....	27
6	Bi-Directional Communication - Single Frequency.....	27
6.1	Mode C1 Applicability and Conformance Requirements.....	27
6.2	Additional Conformance requirements .....	27
6.2.1	Bi-directional Communication.....	27
6.2.1.1	Applicability.....	27
6.2.1.2	Acknowledgement.....	27
6.2.1.2.1	Description .....	27
6.2.1.2.2	Limits .....	27
6.2.1.2.3	Conformance .....	28

STANDARD PREVIEW  
(standards.iteh.ai)

oSIST prEN 303 131 V1.1.0:2014

[https://standards.iteh.ai/catalog/standards/sist/002e561-65f6-4443-9d4e-](https://standards.iteh.ai/catalog/standards/sist/002e561-65f6-4443-9d4e-867160a63f6/osist-pr-en-303-131-v1-1-0-2014)

[867160a63f6/osist-pr-en-303-131-v1-1-0-2014](https://standards.iteh.ai/catalog/standards/sist/002e561-65f6-4443-9d4e-867160a63f6/osist-pr-en-303-131-v1-1-0-2014)

6.2.2	Void .....	28
6.2.3	Transmitter Parameters .....	28
6.2.3.1	Duty Cycle and short term behaviour .....	28
6.2.4	Receiver Parameters .....	28
6.2.4.1	Applicability .....	28
6.2.4.2	Adjacent Channel Selectivity .....	28
6.2.4.2.1	Description .....	28
6.2.4.2.2	Limits .....	29
6.2.4.2.3	Conformance .....	29
6.2.4.3	Blocking .....	29
6.2.4.3.1	Description .....	29
6.2.4.3.2	Limits .....	29
6.2.4.3.3	Conformance .....	29
6.2.4.4	Adjacent Channel Saturation .....	29
6.2.4.4.1	Description .....	29
6.2.4.4.2	Limits .....	29
6.2.4.4.3	Conformance .....	29
6.2.4.5	Spurious Response Rejection .....	29
6.2.4.5.1	Description .....	29
6.2.4.5.2	Limits .....	29
6.2.4.5.3	Conformance .....	29
6.2.4.6	Behaviour at high wanted signal level .....	30
6.2.4.6.1	Description .....	30
6.2.4.6.2	Limits .....	30
6.2.4.6.3	Conformance .....	30
7	Bi-Directional Communication with Frequency Agility .....	30
7.1	Mode CN Applicability and Conformance Requirements .....	30
7.2	Additional Conformance requirements .....	30
7.2.1	Bi-directional Communication .....	30
7.2.1.1	Applicability .....	30
7.2.1.2	Acknowledgement .....	30
7.2.1.2.1	Description .....	30
7.2.1.2.2	Limits .....	30
7.2.1.2.3	Conformance .....	31
7.2.2	Frequency Agility .....	31
7.2.2.1	Applicability .....	31
7.2.2.2	Ability to change communication frequency .....	31
7.2.2.2.1	Description .....	31
7.2.2.2.2	Limits .....	31
7.2.2.2.3	Conformance .....	31
7.2.3	Transmitter Parameters .....	31
7.2.3.1	Duty Cycle and short term behaviour .....	31
7.2.4	Receiver Parameters .....	31
7.2.4.1	Applicability .....	32
7.2.4.2	Adjacent Channel Selectivity .....	32
7.2.4.2.1	Description .....	32
7.2.4.2.2	Limits .....	32
7.2.4.2.3	Conformance .....	32
7.2.4.3	Blocking .....	32
7.2.4.3.1	Description .....	32
7.2.4.3.2	Limits .....	32
7.2.4.3.3	Conformance .....	32
7.2.4.4	Adjacent Channel Saturation .....	32
7.2.4.4.1	Description .....	32
7.2.4.4.2	Limits .....	32
7.2.4.4.3	Conformance .....	32
7.2.4.5	Spurious Response Rejection .....	33
7.2.4.5.1	Description .....	33
7.2.4.5.2	Limits .....	33
7.2.4.5.3	Conformance .....	33
7.2.4.6	Behaviour at high wanted signal level .....	33

7.2.4.6.1	Description .....	33
7.2.4.6.2	Limits .....	33
7.2.4.6.3	Conformance .....	33
8	Testing for compliance with technical requirements.....	33
8.1	Environmental conditions for testing .....	33
8.2	Interpretation of the measurement results .....	33
8.3	Test and General Conditions .....	34
8.3.1	Transmitter test signals .....	34
8.3.2	Testing of multi frequency or frequency agile equipment .....	35
8.3.2.1	Uniform maximum transmit power .....	35
8.3.2.2	Non-uniform maximum transmit power .....	36
8.3.3	Dummy load .....	36
8.3.4	EUT without an external RF connector .....	36
8.3.4.1	EUT with an internal connector .....	36
8.3.5	Conducted and radiated measurements .....	37
8.3.6	Void .....	38
8.3.7	Measuring receiver .....	38
8.3.8	General methods of measurement.....	38
8.3.8.1	Transmitters .....	38
8.3.8.2	Receivers .....	38
8.3.8.3	Receiver two signal measurements .....	38
8.3.8.4	Signal Generators and Signal Sources.....	39
8.3.9	Normal and extreme test conditions.....	39
8.3.9.1	General .....	39
8.3.9.2	Normal test conditions .....	39
8.3.9.2.1	Normal temperature and humidity .....	39
8.3.9.2.2	Normal power source .....	40
8.3.9.3	Extreme test conditions .....	40
8.3.9.3.1	Extreme temperatures .....	40
8.3.9.3.2	Extreme power source voltages .....	40
8.3.10	Presentation of equipment for testing purposes .....	40
8.3.11	Wanted performance criteria .....	41
8.3.11.1	Receiver response .....	41
8.3.11.2	Receiver sensitivity reference .....	41
8.4	Essential radio test suites - Transmitters and Emissions .....	41
8.4.1	Frequency error .....	41
8.4.1.1	Description .....	41
8.4.1.2	Test conditions .....	41
8.4.1.3	Method of measurement .....	42
8.4.1.4	Measurement procedure .....	42
8.4.2	Effective Radiated Power (conducted measurement) .....	42
8.4.2.1	Description .....	42
8.4.2.2	Test conditions .....	42
8.4.2.3	Method of measurement .....	42
8.4.2.4	Measurement procedure .....	42
8.4.3	Effective radiated power (radiated measurement) .....	43
8.4.3.1	Description .....	43
8.4.3.2	Test conditions .....	43
8.4.3.3	Method of measurement .....	43
8.4.3.4	Measurement procedure .....	43
8.4.4	Transient power .....	43
8.4.4.1	Description .....	43
8.4.4.2	Test conditions .....	43
8.4.4.3	Method of measurement .....	43
8.4.4.4	Measurement procedure .....	43
8.4.5	Adjacent channel power ( $B \leq 25$ kHz).....	44
8.4.5.1	Description .....	44
8.4.5.2	Test conditions .....	44
8.4.5.3	Method of measurement .....	44
8.4.5.4	Measurement procedure .....	44
8.4.6	Adjacent Channel Power ( $B > 25$ kHz) .....	45



8.4.6.1	Description .....	45
8.4.6.2	Test conditions .....	45
8.4.6.3	Method of measurement .....	45
8.4.6.4	Measurement procedure .....	45
8.4.7	Unwanted emissions in the spurious domain .....	46
8.4.7.1	Description .....	46
8.4.7.2	Test conditions .....	46
8.4.7.3	Method of measurement .....	46
8.4.7.4	Measurement procedure .....	46
8.4.7.4.1	Conducted measurement .....	46
8.4.7.4.2	Radiated measurement .....	47
8.4.8	Frequency stability under low voltage conditions .....	47
8.4.8.1	Description .....	47
8.4.8.2	Test Conditions .....	47
8.4.8.3	Method of measurement .....	47
8.4.8.4	Measurement procedure .....	47
8.4.9	Duty Cycle and short term behaviour .....	48
8.4.9.1	Description .....	48
8.4.9.2	Test conditions .....	48
8.4.9.3	Method of measurement .....	49
8.4.1.4	Measurement procedure .....	49
8.5	Essential radio test suites - Receivers .....	50
8.5.1	Adjacent channel selectivity .....	50
8.5.1.1	Description .....	50
8.5.1.2	Test Conditions .....	50
8.5.1.3	Method of measurement .....	50
8.5.1.4	Measurement procedure .....	50
8.5.2	Receiver saturation at adjacent channel .....	50
8.5.2.1	Description .....	50
8.5.2.2	Test Conditions .....	50
8.5.2.3	Method of measurement .....	50
8.5.2.4	Measurement procedure .....	51
8.5.3	Blocking .....	51
8.5.3.1	Description .....	51
8.5.3.2	Test Conditions .....	51
8.5.3.3	Method of measurement .....	51
8.5.3.4	Measurement procedure .....	51
8.5.4	Spurious response rejection .....	51
8.5.4.1	Description .....	51
8.5.4.2	Test Conditions .....	51
8.5.4.3	Method of measurement .....	51
8.5.4.4	Measurement procedure .....	52
8.5.5	Void .....	52
8.5.6	Behaviour at high wanted signal level .....	52
8.5.6.1	Description .....	52
8.5.6.2	Test Conditions .....	52
8.5.6.3	Method of measurement .....	52
8.5.6.4	Measurement procedure .....	52
8.6	Radio test suites - Transceivers .....	53
8.6.1	Acknowledgement .....	53
8.6.1.1	Description .....	53
8.6.1.2	Test Conditions .....	53
8.6.1.3	Method of measurement .....	53
8.6.1.4	Measurement procedure .....	53
8.6.2	Frequency Agility .....	53
8.6.2.1	Description .....	53
8.6.2.2	Test Conditions .....	53
8.6.2.3	Method of measurement .....	53
8.6.2.4	Measurement procedure .....	54

<b>Annex A (normative):</b>	<b>HS Requirements and conformance Test specifications Table (HS-RTT) .....</b>	<b>55</b>
-----------------------------	---	-----------

<b>Annex B (normative):</b>	<b>Test sites and arrangements for radiated measurement .....</b>	<b>57</b>
B.1	Radiation test sites .....	57
B.2	Antennas .....	61
B.2.1	Measurement antenna .....	61
B.2.2	Substitution antenna .....	61
B.3	Guidance on the use of radiation test sites .....	62
B.3.1	Power supplies for the battery powered EUT .....	62
B.3.2	Site preparation .....	62
B.4	Coupling of signals .....	63
B.4.1	General .....	63
B.4.2	Data Signals .....	63
B.5	Void .....	63
B.6	Measurement procedures for radiated measurement .....	63
B.6.1	Radiated measurements in an OATS or SAR .....	63
B.6.2	Radiated measurements in a FAR .....	64
B.6.3	Substitution measurement .....	64
B.7	Guidance for testing technical requirements .....	65
B.7.1	Essential radio test suites and corresponding test sites .....	65
<b>Annex C (normative):</b>	<b>Test Fixture .....</b>	<b>66</b>
C.1	Validation of the test-fixture in the temperature chamber .....	67
C.2	Mode of use .....	69
<b>Annex D (normative):</b>	<b>Specification for measurement filter .....</b>	<b>70</b>
<b>Annex E (normative):</b>	<b>Technical performance of the spectrum analyser .....</b>	<b>72</b>
<b>Annex F (normative):</b>	<b>Duty Cycle and Timing Parameters - Definitions .....</b>	<b>73</b>
F.1	Parameter Definitions .....	73
F.1.1	Transmission .....	73
F.1.2	$P_{\text{Threshold}}$ .....	73
F.1.3	Observation bandwidth ( $F_{\text{dc}}$ ) .....	73
F.1.4	Void .....	73
F.1.5	Observation Period ( $T_{\text{obs}}$ ) .....	73
F.1.6	On-Time ( $T_{\text{on}}$ ) .....	73
F.1.6.1	Maximum On-Time ( $T_{\text{on\_max}}$ ) .....	73
F.1.7	Cumulative On-Time ( $T_{\text{on\_cum}}$ ) .....	73
F.1.8	Off-Time ( $T_{\text{off}}$ ) .....	74
F.1.8.1	Minimum Off - Time ( $T_{\text{off\_min}}$ ) .....	74
F.1.8.2	Disregard-Time ( $T_{\text{dis}}$ ) .....	74
F.2	Duty Cycle Definition .....	75
<b>Annex G (informative):</b>	<b>Declarations to be made by the provider .....</b>	<b>76</b>
<b>Annex H (informative):</b>	<b>Bibliography .....</b>	<b>77</b>
<b>Annex I (informative):</b>	<b>Change history .....</b>	<b>78</b>
History .....		79

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This draft Harmonized European Standard (EN) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the combined Public Enquiry and Vote phase of the ETSI standards EN Approval Procedure.

The present document has been produced by ETSI in response to mandate M/284 issued from the European Commission under Directive 98/34/EC [i.9] as amended by Directive 98/48/EC [i.6].

The title and reference to the present document are intended to be included in the publication in the Official Journal of the European Union of titles and references of Harmonized Standard under the Directive 1999/5/EC [i.2].

The requirements relevant to Directive 1999/5/EC [i.2] are summarized in annex A.

**ITeH STANDARD PREVIEW**  
(standards.iteh.ai)

<b>Proposed national transposition dates</b>	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**may not**", "**need**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

---

## Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [i.2]. The modular structure is shown in ETSI EG 201 399 [i.1].

The present document is intended to be applicable to Short Range equipment used in applications for which a high overall reliability of operation may be required.

It is recognized that the radio communications link alone does not determine the overall operation of a system, but that a functioning radio communications link is an essential foundation upon which a system may be built.

The present document sets out various means and features by which the performance of a radio communications link may be improved. These include:

- 1) Spectrum Access Rules - with the aim of reducing the probability of collisions between transmissions from different equipment.
- 2) Receiver Parameters - with the aim of reducing the probability of interference from equipment on other frequencies.
- 3) Bi-Directional Communications - with the aim of reducing the time and number of transmissions required to achieve a given level of confidence in successful communication.
- 4) Frequency Agility - with the aim of enabling the equipment to change its operating frequency to avoid certain types of interference.

Clauses 1 and 3 provide a general description on the types of equipment covered by the present document and the definitions and abbreviations used.

Clause 4 specifies technical requirements to be met by all equipment.

Clause 5 specifies technical requirements for receivers in equipment with uni-directional communications.

Clause 6 specifies technical requirements for equipment with bi-directional communications.

Clause 7 specifies technical requirements for equipment with bi-directional communications and frequency agility.

Clause 8 specifies the methods for testing for compliance with the technical requirements.

Annex A summarizes the requirements relevant to Directive 1999/5/EC [i.2].

**ITEH STANDARD PREVIEW**  
**(standards.iteh.ai)**

[oSIST prEN 303 131 V1.1.0:2014](https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-e867160a63f6/osist-pren-303-131-v1-1-0-2014)

<https://standards.iteh.ai/catalog/standards/sist/f002e561-65fc-4443-9d4e-e867160a63f6/osist-pren-303-131-v1-1-0-2014>

# 1 Scope

The present document applies to wireless alarms equipment using low duty cycle, as described in clause 4 and in ETSI TS 103 060 [i.7], as a means of enhancing reliability of radio communications.

The present document also applies to any wireless alarm that meets the usage restrictions for the frequency concerned.

SRD alarms and social alarms are also covered in the scope of alternative standards, e.g. ETSI EN 300 220-2 [i.8].

These equipment types may operate in the frequency bands given in table 1a.

**Table 1a: Frequency bands designated to wireless alarms by EU Commission Decision 2013/752/EU [i.3]**

	Frequency band	Category of short-range devices	Other usage restrictions
Transmit and Receive	868,600 MHz to 868,700 MHz	Low duty cycle/high reliability devices	This set of usage conditions is only available to alarm systems.
Transmit and Receive	869,200 MHz to 869,250 MHz	Low duty cycle/high reliability devices	This set of usage conditions is only available to social alarm devices.
Transmit and Receive	869,250 MHz to 869,300 MHz	Low duty cycle/high reliability devices	This set of usage conditions is only available to alarm systems.
Transmit and Receive	869,300 MHz to 869,400 MHz	Low duty cycle/high reliability devices	This set of usage conditions is only available to alarm systems.
Transmit and Receive	869,650 MHz to 869,700 MHz	Low duty cycle/high reliability devices	This set of usage conditions is only available to alarm systems.

oSIST prEN 303 131 V1.1.0:2014

<https://standards.iteh.ai/catalog/standards/sist/002e561-65fc-4443-9d4e-c667100a6316/osist-pr-en-303-131-v1-1-0-2014>

These equipment types are also capable of operating in all or part of the frequency bands given in table 1b.

**Table 1b: Non specific SRD frequency bands also available to wireless alarms within 25 MHz to 1 000 MHz**

	Frequency bands
Transmit and Receive	169,400 MHz to 169,8125 MHz
Transmit and Receive	863,000 MHz to 876,000 MHz
Transmit and Receive	915,000 MHz to 921,000 MHz

NOTE 1: The non specific frequency bands in table 1b are primarily intended for all SRD types; therefore the same level of reliability as when operating on frequencies in table 1a may not be achieved.

The present document is intended to cover the provisions of Directive 1999/5/EC (R&TTE Directive) [i.2], Article 3.2, which states that "..... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive may apply to equipment within the scope of the present document.

NOTE 2: A list of such ENs is included on the web site <http://www.newapproach.org>.

## 2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

### 2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] Recommendation ITU-T O.153 (1992): "Basic parameters for the measurement of error performance at bit rates below the primary rate".
- [2] ETSI TR 100 028 (all parts) (V1.4.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".

### 2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".
- [i.2] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [i.3] Commission Decision 2013/752/EU on harmonization of the radio spectrum for use by short-range devices.
- [i.4] CISPR 16 (2006) (parts 1-1, 1-4 and 1-5): "Specification for radio disturbance and immunity measuring apparatus and methods; Part 1: Radio disturbance and immunity measuring apparatus".
- [i.5] ETSI TR 102 273 (all parts) (V1.2.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement on Radiated Methods of Measurement (using test site) and evaluation of the corresponding measurement uncertainties".
- [i.6] Directive 98/48/EC of the European parliament and of the council of 20 July 1998 amending Directive 98/34/EC laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.7] ETSI TS 103 060: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD); Method for a harmonized definition of Duty Cycle Template (DCT) transmission as a passive mitigation technique used by short range devices and related conformance test methods".
- [i.8] ETSI EN 300 220-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD); Radio equipment to be used in the 25 MHz to 1 000 MHz frequency range with power levels ranging up to 500 mW; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive".
- [i.9] Directive 98/34/EC of the European Parliament and the Council of 22 June 1998, laying down a procedure for the provision of information in the field of technical standards and regulations.

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

**adjacent channel:** frequency band, of width channel spacing, on either side of the operating channel

**alternate adjacent channels:** those two channels offset from the operating channel by double the channel bandwidth

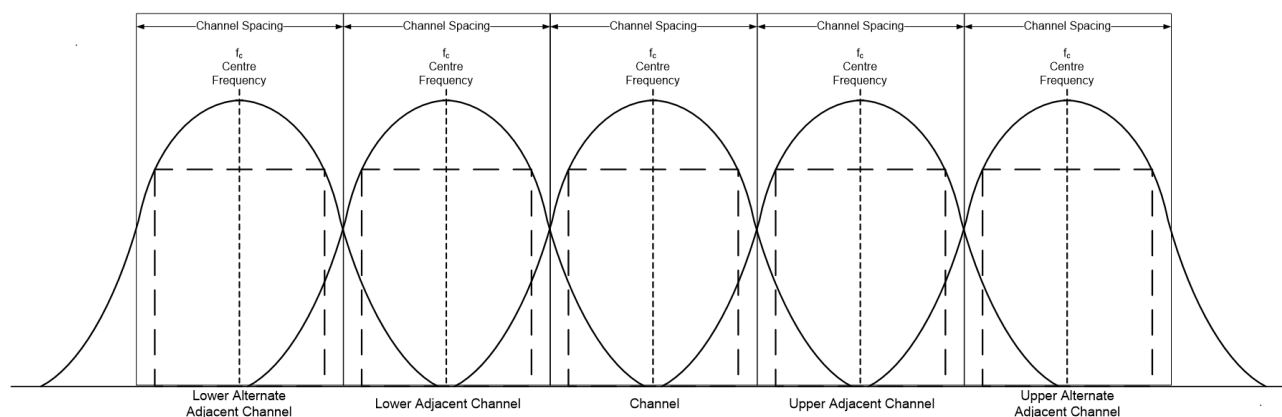


Figure 1: Adjacent and alternate adjacent channel definitions

**assigned frequency band:** frequency band or sub-band within which the device is authorized to operate and to perform the intended function of the equipment

**centre frequency:** nominal centre frequency of a transmission

**channel:** frequency band, of width channel spacing, the centre of which defines the nominal centre frequency for a given transmission

**channel spacing:** separation, in hertz, between adjacent nominal centre frequencies

**channelized equipment:** equipment to be used at a frequency where the channel spacing is defined by regulation

**conducted measurements:** measurements which are made using a direct  $50 \Omega$  connection to the equipment under test

**continuous transmission:** modulated transmission without interruption for the period of the test

**dedicated antenna:** removable antenna supplied and tested with the radio equipment, designed as an indispensable part of the equipment

**disregard time ( $T_{dis}$ ):** See annex F.

**duty cycle:** See annex F.

**extreme (voltage/temperature) test conditions:** See clause 8.3.9.

**frequency adaptivity:** capability of equipment to avoid using permitted operating channels that it has determined are temporarily or permanently unsuitable for its use

**frequency agility:** capability of equipment to dynamically change operating channel

**integral antenna:** permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment