



SLOVENSKI STANDARD
oSIST prEN ISO 4035:2016
01-junij-2016

Šestrobe nizke matice s posnetjem (tip 0) - Razreda izdelave A in B (ISO/DIS 4035:2016)

Hexagon thin nuts (style 0), chamfered - Product grades A and B (ISO/DIS 4035:2016)

Niedrige Sechskantmuttern mit Fase (Typ 0) - Produktklassen A und B (ISO/DIS 4035:2016)

Écrous hexagonaux bas (style 0), chanfreinés - Grades A et B (ISO/DIS 4035:2016)

iTeh STANDARD PREVIEW

(standards.itteh.ai)

Ta slovenski standard je istoveten z: prEN ISO 4035

oSIST prEN ISO 4035:2016
<https://standards.itteh.ai/catalog/standards/sist/505d16ac-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016>

ICS:

21.060.20 Matice Nuts

oSIST prEN ISO 4035:2016 en,fr

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 4035:2016](#)

<https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016>

DRAFT INTERNATIONAL STANDARD

ISO/DIS 4035

ISO/TC 2/SC 12

Secretariat: DIN

Voting begins on:
2016-03-31Voting terminates on:
2016-06-29

Hexagon thin nuts (style 0), chamfered — Product grades A and B

Écrous bas hexagonaux chanfreinés (style 0) — Grades A et B

ICS: 21.060.20

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 4035:2016](https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016)

<https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel three month enquiry.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.



Reference number
ISO/DIS 4035:2016(E)

© ISO 2016

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 4035:2016](https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016)

<https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 2, *Fasteners*, Subcommittee SC 12, *Fasteners with metric internal thread*.

This fifth edition cancels and replaces the fourth edition (ISO 4035:2012).

This standard differs from ISO 4035:2012 as follows:

- the Scope has been updated;
- a warning and a sentence have been added in the scope for the use of thin nuts;
- the thread M7 has been added;
- for steel nuts, quenching and tempering have been specified in accordance with ISO 898-2 as mandatory or optional;
- for stainless-steel nuts, property classes have been updated;
- non-ferrous metal nuts have been deleted as a consequence of withdrawal of ISO 8839.

Hexagon thin nuts (style 0), chamfered — Product grades A and B

1 Scope

This International Standard specifies the characteristics of hexagon thin nuts (style 0) with coarse pitch thread from nominal diameters M1,6 through M64, with product grade A for nominal diameters \leq M16 and product grade B for nominal diameters $>$ M16.

Thin nuts used as jam nuts shall be assembled together with a regular nut or a high nut. .

WARNING Thin nuts (style 0) have a reduced loadability compared to regular nuts or high nuts, and are not designed to provide resistance to thread stripping (see [ISO 898-2](#)).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 262, *ISO general purpose metric screw threads — Selected sizes for screws, bolts and nuts*

ISO 724, *ISO general-purpose metric screw threads — Basic dimensions*

ISO 898-2, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 2: Nuts with specified property classes — Coarse thread and fine pitch thread*

<https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d->

ISO 965-2, *ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality*

ISO 965-5, *ISO general-purpose metric screw threads — Tolerances — Part 5: Limits of sizes for internal screw threads to mate with hot-dip galvanized external screw threads with maximum size of tolerance position h before galvanizing*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 3506-2, *Mechanical properties of corrosion-resistant stainless steel fasteners — Part 2: Nuts*

ISO 4042, *Fasteners — Electroplated coatings*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-2, *Fasteners — Surface discontinuities — Part 2: Nuts*

ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*

ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coatings*


ISO 10684, *Fasteners — Hot dip galvanized coatings*

ISO 16048, *Passivation of corrosion-resistant stainless-steel fasteners*

3 Dimensions

See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

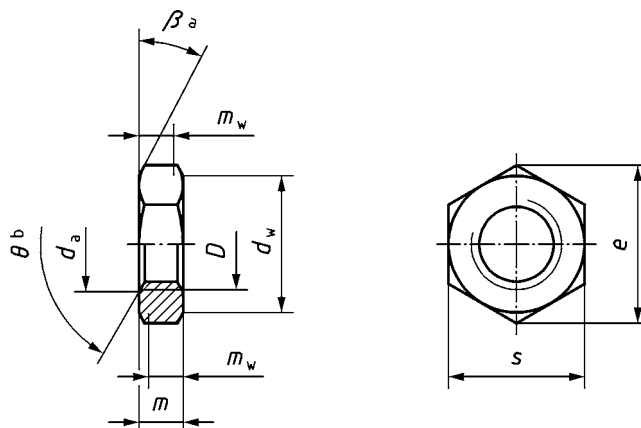

- a $\beta = 15^\circ$ to 30° .
- b $\theta = 110^\circ$ to 120° .

Figure 1 — Dimensions
Table 1 — Preferred threads
 (standards.iteh.ai)

Dimensions in millimetres

Thread, D		M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12
p_a		0,35	0,4	0,45	0,5	0,7	0,8	1	1,25	1,5	1,75
d_a	max.	1,84	2,30	2,90	3,45	4,60	5,75	6,75	8,75	10,80	13,00
	min.	1,60	2,00	2,50	3,00	4,00	5,00	6,00	8,00	10,00	12,00
d_w	min.	2,42	3,07	4,07	4,57	5,88	6,88	8,88	11,63	14,63	16,63
e	min.	3,41	4,32	5,45	6,01	7,66	8,79	11,05	14,38	17,77	20,03
m	max.	1,00	1,20	1,60	1,80	2,20	2,70	3,20	4,00	5,00	6,00
	min.	0,75	0,95	1,35	1,55	1,95	2,45	2,90	3,70	4,70	5,70
m_w	min.	0,60	0,76	1,08	1,24	1,56	1,96	2,32	2,96	3,76	4,56
s	nom. = max.	3,20	4,00	5,00	5,50	7,00	8,00	10,00	13,00	16,00	18,00
	min.	3,02	3,82	4,82	5,32	6,78	7,78	9,78	12,73	15,73	17,73

ISO/DIS 4035:2016(E)

Table 1 (continued)

Dimensions in millimetres

Thread, D		M16	M20	M24	M30	M36	M42	M48	M56	M64
p^a		2	2,5	3	3,5	4	4,5	5	5,5	6
d_a	max.	17,30	21,60	25,90	32,40	38,90	45,40	51,80	60,50	69,10
	min.	16,00	20,00	24,00	30,00	36,00	42,00	48,00	56,00	64,00
d_w	min.	22,49	27,70	33,25	42,75	51,11	59,95	69,45	78,66	88,16
e	min.	26,75	32,95	39,55	50,85	60,79	71,30	82,60	93,56	104,86
m	max.	8,00	10,00	12,00	15,00	18,00	21,00	24,00	28,00	32,00
	min.	7,42	9,10	10,90	13,90	16,90	19,70	22,70	26,70	30,40
m_w	min.	5,94	7,28	8,72	11,12	13,52	15,76	18,16	21,36	24,32
s	nom. = max.	24,00	30,00	36,00	46,00	55,00	65,00	75,00	85,00	95,00
	min.	23,67	29,16	35,00	45,00	53,80	63,10	73,10	82,80	92,80

^a P is the pitch of the thread.

Table 2 — Non-preferred threads

Dimensions in millimetres

Thread, D		M3,5	M7	M14	M18	M22	M27	M33	M39	M45	M52	M60
p^a		0,6	1	2	2,5	3	3,5	4	4,5	5	5,5	
d_a	max.	4,00	7,75	15,10	19,50	23,70	29,10	35,60	42,10	48,60	56,20	64,80
	min.	3,50	7	14,00	18,00	22,00	27,00	33,00	39,00	45,00	52,00	60,00
d_w	min.	5,07	9,53	19,64	24,85	31,35	38,00	46,55	55,86	64,70	74,19	83,41
e	min.	6,58	12,01	23,36	29,56	37,29	45,20	55,37	66,44	76,95	88,25	99,21
m	max.	2,00	3,70	7,00	9,00	11,00	13,50	16,50	19,50	22,50	26,00	30,00
	min.	1,75	3,34	6,42	8,42	9,90	12,40	15,40	18,20	21,20	24,70	28,70
m_w	min.	1,40	2,67	5,14	6,74	7,92	9,92	12,32	14,56	16,96	19,76	22,96
s	nom. = max.	6,00	11,00	21,00	27,00	34,00	41,00	50,00	60,00	70,00	80,00	90,00
	min.	5,82	10,63	20,67	26,16	33,00	40,00	49,00	58,80	68,10	78,10	87,80

^a P is the pitch of the thread.

4 Requirements and reference International Standards

See Table 3.

Table 3 — Requirements and reference International Standards

Material		Steel	Stainless steel	Non-ferrous metal
General requirements	International Standard	ISO 8992		
Thread	Tolerance class	6H ^a		
	International Standards	ISO 262, ISO 724, ISO 965-2, ISO 965-5		
Mechanical properties	Property class	M5 ≤ D ≤ M39	04, 05 ^b	M5 ≤ D ≤ M24 A2-035, A4-035, A4-040
		M24 < D ≤ M39		A2-025, A2-035, A4-035, A4-040
	D < M5 and D > M39	Mechanical properties as agreed ^c	D < M5 and D > M39	Mechanical properties as agreed
	International Standards	ISO 898-2	ISO 3506-2	Mechanical properties as agreed
Tolerance	Product grade	D ≤ M16: A D > M16: B		
	International Standard	ISO 4759-1		
Finish — Coating	As processed	Requirements for electroplating are specified in ISO 4042. Requirements for non-electrolytically applied zinc flake coatings are specified in ISO 10683. Requirements for hot dip galvanized coatings are specified in ISO 10684. Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser.	Clean and bright A method for passivation is specified in ISO 16048.	As processed Requirements for electroplating are specified in ISO 4042.
Surface integrity	Limits for surface discontinuities are specified in ISO 6157-2.		—	—
Acceptability	Acceptance inspection is specified in ISO 3269.			
<p>^a Other tolerance classes may be specified prior to coating, depending on the type of coating to be applied. For coated nuts, see relevant coating standards, e.g. ISO 4042, ISO 10683 and ISO 10684.</p> <p>^b Property class 05 shall be quenched and tempered in accordance with ISO 898-2.</p> <p>^c See ISO/TR 16224 for information.</p>				

5 Designation

EXAMPLE A chamfered hexagon thin nut (style 0) with nominal diameter M12 and property class 05 is designated as follows:

ISO/DIS 4035:2016(E)

Hexagon thin nut ISO 4035 – M12 – 05

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 4035:2016
https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-
fbd279cae0b8/osist-pren-iso-4035-2016](https://standards.iteh.ai/catalog/standards/sist/305d16ae-1f73-4c1c-a85d-fbd279cae0b8/osist-pren-iso-4035-2016)