



**SLOVENSKI STANDARD**  
**oSIST prEN ISO 7042:2016**  
**01-junij-2016**

---

**Šestrobe zaščitne visoke matice z deformacijo (iz kovine) - Razreda izdelave A in B (ISO/DIS 7042:2016)**

Prevailing torque (all-metal) hexagon high nuts - Product grades A and B (ISO/DIS 7042:2016)

Hohe Sechskantmuttern mit Klemmteil (Ganzmetallmuttern) - Produktklassen A und B (ISO/DIS 7042:2016)

Écrous hexagonaux hauts autofreinés (tout métal) - Grades A et B (ISO/DIS 7042:2016)

**Ta slovenski standard je istoveten z: prEN ISO 7042**

**ICS:**

21.060.20      Matice      Nuts

**oSIST prEN ISO 7042:2016**      **en,fr,de**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[oSIST prEN ISO 7042:2016](#)

<https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016>

# DRAFT INTERNATIONAL STANDARD

## ISO/DIS 7042

ISO/TC 2/SC 12

Secretariat: DIN

Voting begins on:  
2016-03-31Voting terminates on:  
2016-06-29

## Prevailing torque (all-metal) hexagon high nuts — Product grades A and B

*Écrous hexagonaux hauts autofreinés (tout métal) — Grades A et B*

ICS: 21.060.20

### iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 7042:2016

<https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

#### ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel three month enquiry.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.



Reference number  
ISO/DIS 7042:2016(E)

© ISO 2016

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 7042:2016](https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016)

<https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
[copyright@iso.org](mailto:copyright@iso.org)  
[www.iso.org](http://www.iso.org)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 2, *Fasteners*, Subcommittee SC 12, *Fasteners with metric internal thread*.

This fourth edition cancels and replaces the third edition (ISO 7042:2012) and the third edition of ISO 7720:2012.

This standard differs from ISO 7042:2012 and ISO 7720: 2012 as follows:

- the Scope has been updated;
- the preferred and the non-preferred threads are given in two separate tables, and the threads M7, M18, M22, M27, M33 and M39 have been added;
- as property class 9 has been deleted, nuts in accordance with ISO 7720: 2012 have been replaced by nuts of property class 10 in accordance with this standard;
- $d_{w, \min}$  has been specified with two decimal place;
- the maximum height have been corrected for M12 (12,60 instead of 13,30) and M24 (24,00 instead of 23,90);
- for steel nuts, quenching and tempering is specified in accordance with ISO 898-2 as mandatory or optional;
- the reference to ISO/TR 16224 for nut design has been added;
- stainless steel nuts have been added;

**ISO/DIS 7042:2016(E)**

- "prevailing torque all metal nuts" has been replaced by the symbol "PTAM" in the designation.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[oSIST prEN ISO 7042:2016](https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016)

<https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016>

# Prevailing torque (all-metal) hexagon high nuts — Product grades A and B

## 1 Scope

This International Standard specifies the characteristics of prevailing torque all-metal hexagon high nuts with coarse pitch thread from nominal diameters M5 through M39, with product grade A for nominal diameters  $\leq$  M16 and product grade B for nominal diameters  $>$  M16.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 262, *ISO general purpose metric screw threads — Selected sizes for screws, bolts and nuts*

ISO 724, *ISO general-purpose metric screw threads — Basic dimensions*

ISO 898-2, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 2: Nuts with specified property classes — Coarse thread and fine pitch thread*

ISO 965-2, *ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality*

ISO 2320, *Prevailing torque steel nuts Functional properties*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 3506-2, *Mechanical properties of corrosion-resistant stainless steel fasteners — Part 2: Nuts*

ISO 4042, *Fasteners — Electroplated coatings*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-2, *Fasteners — Surface discontinuities — Part 2: Nuts*

ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*

ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coatings*


ISO 16048, *Passivation of corrosion-resistant stainless-steel fasteners*

ISO/DIS 7042:2016(E)

3 Dimensions

See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

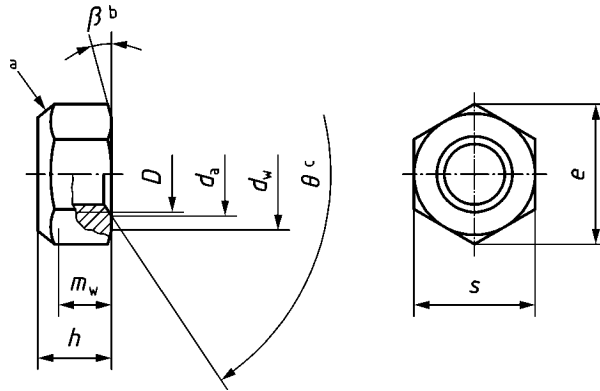

- a Prevailing torque element, shape at the discretion of the manufacturer.
- b  $\beta = 15^\circ$  to  $30^\circ$ .
- c  $\theta = 90^\circ$  to  $120^\circ$ .

**Figure 1 — Dimensions**  
**Table 1 — Preferred threads**  
 (standards.iteh.ai)

Dimensions in millimetres

| Thread, $D$ | M5          | M6   | M8    | M10   | M12   | M16   | M20   | M24   | M30   | M36   |       |
|-------------|-------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| $p^a$       | 0,8         | 1    | 1,25  | 1,5   | 1,75  | 2     | 2,5   | 3     | 3,5   | 4     |       |
| $d_a$       | max.        | 5,75 | 6,75  | 8,75  | 10,80 | 13,00 | 17,30 | 21,60 | 25,90 | 32,40 | 38,90 |
|             | min.        | 5,00 | 6,00  | 8,00  | 10,00 | 12,00 | 16,00 | 20,00 | 24,00 | 30,00 | 36,00 |
| $d_w$       | min.        | 6,88 | 8,88  | 11,63 | 14,63 | 16,63 | 22,49 | 27,70 | 33,25 | 42,75 | 51,11 |
| $e$         | min.        | 8,79 | 11,05 | 14,38 | 17,77 | 20,03 | 26,75 | 32,95 | 39,55 | 50,85 | 60,79 |
| $h$         | max.        | 5,50 | 6,00  | 8,00  | 10,00 | 12,60 | 16,40 | 20,30 | 24,00 | 30,00 | 36,00 |
|             | min.        | 4,80 | 5,40  | 7,14  | 8,94  | 11,57 | 15,70 | 19,00 | 22,60 | 27,30 | 33,10 |
| $m_w$       | min.        | 3,52 | 3,92  | 5,15  | 6,43  | 8,30  | 11,28 | 13,52 | 16,16 | 19,44 | 23,52 |
| $s$         | nom. = max. | 8,00 | 10,00 | 13,00 | 16,00 | 18,00 | 24,00 | 30,00 | 36,00 | 46,00 | 55,00 |
|             | min.        | 7,78 | 9,78  | 12,73 | 15,73 | 17,73 | 23,67 | 29,16 | 35,00 | 45,00 | 53,80 |

<sup>a</sup>  $P$  is the pitch of the thread.



Table 2 — Non-preferred threads

Dimensions in millimetres

| Thread, <i>D</i>      | M7                                   | M14   | M18   | M22   | M27   | M33   | M39   |       |
|-----------------------|--------------------------------------|-------|-------|-------|-------|-------|-------|-------|
| <i>p</i> <sup>a</sup> | 1                                    | 2     | 2,5   | 2,5   | 3     | 3,5   | 4     |       |
| <i>d</i> <sub>a</sub> | max.                                 | 7,75  | 15,10 | 19,50 | 23,70 | 29,10 | 35,60 | 42,10 |
|                       | min.                                 | 7,00  | 14,00 | 18,00 | 22,00 | 27,00 | 33,00 | 39,00 |
| <i>d</i> <sub>w</sub> | min.                                 | 9,53  | 19,64 | 24,85 | 31,35 | 38,00 | 46,55 | 55,86 |
| <i>e</i>              | min.                                 | 12,01 | 23,36 | 29,56 | 37,29 | 45,20 | 55,37 | 66,44 |
| <i>h</i>              | max.                                 | 7,60  | 14,10 | 18,30 | 22,00 | 27,00 | 33,00 | 39,00 |
|                       | min.                                 | 6,84  | 13,40 | 16,90 | 20,50 | 25,40 | 30,90 | 35,90 |
| <i>m</i> <sub>w</sub> | min.                                 | 4,91  | 9,68  | 12,08 | 14,48 | 18,00 | 21,92 | 25,44 |
| <i>s</i>              | nom. = max.                          | 11,00 | 21,00 | 27,00 | 34,00 | 41,00 | 50,00 | 60,00 |
|                       | min.                                 | 10,63 | 20,67 | 26,16 | 33,00 | 40,00 | 49,00 | 58,80 |
| <sup>a</sup>          | <i>P</i> is the pitch of the thread. |       |       |       |       |       |       |       |

## iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 7042:2016

<https://standards.iteh.ai/catalog/standards/sist/78158675-5578-4174-8758-929baf5cfc3/osist-pren-iso-7042-2016>

## ISO/DIS 7042:2016(E)

## 4 Requirements and reference International Standards

See Table 3.

Table 3 — Requirements and reference International Standards

| Material  |  | Steel   | Stainless steel   |
|---|--|---|---|
| <b>General requirements</b>   | International Standard   | ISO 8992  |   |
| <b>Thread</b>   | Tolerance class  | 6H <sup>a</sup>   |   |
|   | International Standards  | ISO 262, ISO 724, ISO 965-2                                     |   |
| <b>Mechanical properties</b>  | Property class   | M5 ≤ D ≤ M39 8 <sup>b</sup> , 10 <sup>c</sup> , 12 <sup>c</sup> | M5 ≤ D ≤ M24 A2-70, A4-70, A4-80  |
|   |  |   | M24 < D ≤ M39 A2-50, A2-70, A4-70, A4-80                                |
|   | D < M5 and D > M39 Mechanical properties as agreed <sup>d</sup>  | D < M5 and D > M39 Mechanical properties as agreed              |   |
|   | International Standard   | ISO 898-2   | ISO 3506-2  |
| <b>Functional properties</b>  | International Standard   | ISO 2320  | As agreed   |
| <b>Tolerance</b>  | Product grade  | D ≤ M16: A<br>D > M16: B  |   |
|   | International Standard   | ISO 4759-1  |   |
| <b>Finish — Coating</b>   | As processed<br>Requirements for electroplating are specified in ISO 4042.<br>Requirements for non-electrolytically applied zinc flake coatings are specified in ISO 10683.<br>Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser. |   | Clean and bright<br>A method for passivation is specified in ISO 16048. |
| <b>Surface integrity</b>  | Limits for surface discontinuities are specified in ISO 6157-2.  |   | —   |
| <b>Acceptability</b>  | Acceptance inspection is specified in ISO 3269.  |   |   |
| <sup>a</sup> Other tolerance classes may be specified prior to coating, depending on the type of coating to be applied. For coated nuts, see relevant coating standards, e.g. ISO 4042 and ISO 10683.<br><sup>b</sup> May be quenched and tempered at the manufacturer's discretion, in accordance with ISO 898-2.<br><sup>c</sup> Shall be quenched and tempered in accordance with ISO 898-2.<br><sup>d</sup> See ISO/TR 16224 for information. |  |   |   |

## 5 Designation

EXAMPLE A Prevailing Torque (PT) All-Metal (AM) hexagon high nut, with nominal diameter M12 and property class 8 is designated as follows:

**PTAM hexagon high nut ISO 7042 – M12 – 8**