



SLOVENSKI STANDARD
SIST EN 16602-70-57:2015
01-november-2015

Zagotavljanje varnih proizvodov v vesoljski tehniki - Zmanjšanje biološke obremenitve s suho vročino za letalsko strojno opremo

Space product assurance - Dry Heat Bioburden Reduction for Flight Hardware

Raumfahrtproduktsicherung - Reduktion der Gesamtkeimzahl bei trockener Hitze für Flughardware

iTeh STANDARD PREVIEW

(standards.iteh.ai)
Assurance produit des projets spatiaux - Réduction par chaleur sèche de la charge microbienne des matériels de vol

[SIST EN 16602-70-57:2015](https://standards.iteh.ai/catalog/standards/sist/b78f65e8-6637-4df2-9002-4255084075df/sist-en-16602-70-57-2015)

Ta slovenski standard je istoveten z: EN 16602-70-57:2015

ICS:

49.140 Vesoljski sistemi in operacije Space systems and operations

SIST EN 16602-70-57:2015

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 16602-70-57:2015](#)

<https://standards.iteh.ai/catalog/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015>

EUROPEAN STANDARD

EN 16602-70-57

NORME EUROPÉENNE

EUROPÄISCHE NORM

September 2015

ICS 49.140

English version

Space product assurance - Dry Heat Bioburden Reduction for Flight Hardware

Assurance produit des projets spatiaux - Réduction par chaleur sèche de la charge microbienne des matériels de vol

Raumfahrtproduktsicherung - Reduktion der Gesamtkeimzahl bei trockener Hitze für Flughardware


This European Standard was approved by CEN on 16 November 2014.

CEN and CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN and CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN and CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN and CENELEC members are the national standards bodies and national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015>

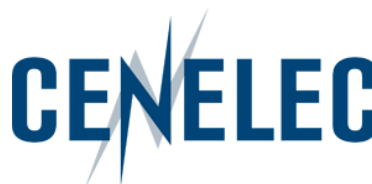

CEN-CENELEC Management Centre:
Avenue Marnix 17, B-1000 Brussels

Table of contents

European foreword	4
Introduction	4
1 Scope	6
2 Normative references	7
3 Terms and abbreviated terms	8
3.1 Terms from other standards.....	8
3.2 Terms specific to the present standard	8
3.3 Abbreviated terms.....	10
3.4 Nomenclature	10
4 Principles	11
5 Requirements	13
5.1 General requirements	13
5.2 Product requirements	13
5.2.1 Product compatibility with process	13
5.2.2 Product cleanliness	13
5.2.3 Product packaging	14
5.2.4 Product release	14
5.3 Process requirements.....	14
5.3.1 Procedure requirements.....	14
5.3.2 Bioburden reduction cycle requirements	17
5.4 Equipment requirements.....	17
Annex A (normative) Dry heat bioburden reduction specification - DRD	19
Annex B (normative) Dry heat bioburden reduction proposal - DRD	21
Annex C (normative) Dry heat bioburden reduction report - DRD	23
Annex D (informative) D-values for 2 to 3 orders of magnitude reduction	25
Annex E (informative) Effective D-values for 4 to 6 orders of magnitude reduction	27

Bibliography	29
---------------------------	-----------

Figures

Figure 4-1: Dry heat bioburden reduction process overview	12
Figure D-1 : D-values for 2 to 3 orders of magnitude reduction.....	25
Figure E-1 : Effective D-values for 4 to 6 orders of magnitude surface reduction.....	27

Tables

Table D-1 : D-values for 2 to 3 orders of magnitude reduction.....	26
Table E-1 : Effective D-values for 4 to 6 orders of magnitude surface reduction.....	28

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 16602-70-57:2015](https://standards.iteh.ai/catalog/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015)

<https://standards.iteh.ai/catalog/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015>

European foreword

This document (EN 16602-70-57:2015) has been prepared by Technical Committee CEN/CLC/TC 5 "Space", the secretariat of which is held by DIN.

This standard (EN 16602-70-57:2015) originates from ECSS-Q-ST-70-57C.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by March 2016, and conflicting national standards shall be withdrawn at the latest by March 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association.

This document has been developed to cover specifically space systems and has therefore precedence over any EN covering the same scope but with a wider domain of applicability (e.g. aerospace).

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

The UN Outer Space Treaty of 1967 sets up the general principles applicable to the exploration and use of outer space. Article IX of the Outer Space Treaty constitutes the primary statement of international law:

“States parties shall pursue studies of outer space, including the Moon and other celestial bodies, and conduct exploration of them so as to avoid their harmful contamination and also adverse changes in the environment of the Earth resulting from the introduction of extraterrestrial matter and, when necessary, adopt appropriate measures for this purpose.”

Harmful contamination in that sense is defined as biological contamination, including organic-constituents, to protect the environment in order to allow future exobiology research. The Committee On Space Research (COSPAR) has established some planetary protection guidelines, based on the Outer Space Treaty. These guidelines impose requirements on spaceflight missions according to target body/mission type combinations.

The objective of this Standard is to ensure that proper procedures for reducing the microbiological contamination on flight hardware are in place to meet the planetary protection constraints.

<http://www.standards.it/en/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015>

1 Scope

This standard defines procedures for the reduction of microbiological contamination of flight hardware using heat.

The procedures described in this standard cover:

- Reduction of microbiological contamination on exposed surfaces, mated surfaces and encapsulated in materials.
- Reduction of microbiological contamination in dry, ambient and uncontrolled humidity environments.

This standard also sets requirements for the conditioning of the flight hardware, bioburden reduction cycle development, and equipment to be used for applying a bioburden reduction procedure.

This standard may be tailored for the specific characteristics and constraints of a space project in conformance with ECSS-S-ST-00.

[SIST EN 16602-70-57:2015](https://standards.iteh.ai/catalog/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015)

<https://standards.iteh.ai/catalog/standards/sist/b78fc5e8-6637-4df2-9002-4233084075df/sist-en-16602-70-57-2015>

2

Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this ECSS Standard. For dated references, subsequent amendments to, or revision of any of these publications do not apply. However, parties to agreements based on this ECSS Standard are encouraged to investigate the possibility of applying the more recent editions of the normative documents indicated below. For undated references, the latest edition of the publication referred to applies.

EN reference	Reference in text	Title
EN 16601-00-01	ECSS-S-ST-00-01	ECSS system - Glossary of terms
EN 16601-40	ECSS-M-ST-40	Space project management - Configuration and information management
EN 16602-10-09	ECSS-Q-ST-10-09	Space product assurance - Nonconformances control system
EN 16602-70-01	ECSS-Q-ST-70-01	Space product assurance - Cleanliness and contamination control
EN 16602-70-53	ECSS-Q-ST-70-53	Space product assurance - Materials and hardware compatibility tests for sterilization processes
EN 16602-70-55	ECSS-Q-ST-70-55	Space product assurance - Microbial examination of flight hardware and cleanrooms
EN 16602-70-58	ECSS-Q-ST-70-58	Space product assurance - Bioburden control of cleanrooms
	IEST-STD-CC1246D	Institute of environmental science and technology - product cleanliness levels and contamination control program

Terms and abbreviated terms

3.1 Terms from other standards

For the purpose of this Standard, the terms and definitions from ECSS-S-ST-00-01 apply.

For the purpose of this Standard, the terms and definitions from ECSS-M-ST-40, ECSS-Q-ST-70-01, ECSS-Q-ST-70-55 and ECSS-Q-ST-70-58 apply, and in particular the following:

Bioburden

Bioburden reduction

Cleanliness level

Product item

ITeC STANDARD PREVIEW
(standards.iteh.ai)

3.2 Terms specific to the present standard

3.2.1 ambient humidity

absolute humidity of no more than 12 g/m³

NOTE This is equivalent to 70 % relative humidity at 20 °C and 1000 hPa pressure.

3.2.2 cycle

sequence of individual steps

NOTE For the purpose of this standard, the individual steps are preconditioning, heat-up, bioburden reduction as defined by the selected procedure, cool-down. Each steps has associated control and monitoring parameters like time and temperature.

3.2.3 D-value

time required to achieve inactivation of 90 % of a population of the test microorganisms under stated conditions

3.2.4 dry humidity

absolute humidity of no more than 1,2 g/m³

NOTE This is equivalent to 25 % relative humidity at 0 °C and 1000 hPa pressure or to 7 % relative humidity at 20 °C and 1000 hPa pressure

3.2.5 effective D-value

used for bioburden reduction of ≥ 4 orders of magnitudes

NOTE 1 Example: One effective D-value is 4 orders of magnitude reduction, 2 times effective D-value is 5 order of magnitude reduction, 3 times effective D-value is 6 order of magnitude reduction.

NOTE 2 Attention: There is a substantial difference in the time required between 3 orders of magnitude reduction and 4 orders of magnitude reduction.

NOTE 3 Reason for the longer time period necessary for ≥ 4 orders of magnitude reduction is a sub-population of typical cleanroom bioburden that is more resistant to heat than the average population.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.2.6 encapsulated bioburden

bioburden inside bulk non-metallic materials

NOTE Examples: bioburden inside of paints, coatings, adhesives, inserts, ablative material.

3.2.7 exposed surfaces

internal and external surfaces free for gas exchange

NOTE Examples: Free for gas exchange are e.g., exterior surfaces, interior surfaces of boxes with venting holes, surfaces of honeycomb cells, surfaces of the outer and inner plies of multi-layer insulation, open cell foam.

3.2.8 mated bioburden

surfaces joined by fasteners rather than by adhesives

3.2.9 parametric release

declaration that a product is at a certain bioburden level, based on records demonstrating that the process parameters were delivered within specified tolerances

NOTE Parametric release can be used for achieving bioburden reduction with heat (temperature and time record sufficient, no need for biological test) but is not acceptable for

bioburden reduction using chemicals
(biological test for process monitoring is
mandatory).

3.2.10 uncontrolled humidity

humidity level that is either not measured or does not conform to ambient
humidity or dry humidity

3.3 Abbreviated terms

For the purpose of this Standard, the abbreviated terms from ECSS-S-ST-00-01
and the following apply:

Abbreviation	Meaning
COSPAR	Committee on Space Research
ESD	electrostatic discharge

3.4 Nomenclature

The following nomenclature apply throughout this document:

- a. The word "shall" is used in this standard to express requirements. All the requirements are expressed with the word "shall".
- b. The word "should" is used in this standard to express recommendations. All the recommendations are expressed with the word "should".

NOTE It is expected that, during tailoring, all the recommendations in this document are either converted into requirements or tailored out.

- c. The words "may" and "need not" are used in this standard to express positive and negative permissions respectively. All the positive permissions are expressed with the word "may". All the negative permissions are expressed with the words "need not".
- d. The word "can" is used in this standard to express capabilities or possibilities, and therefore, if not accompanied by one of the previous words, it implies descriptive text.

NOTE In ECSS "may" and "can" have a complete different meaning: "may" is normative (permission) and "can" is descriptive.

- e. The present and past tense are used in this standard to express statement of fact, and therefore they imply descriptive text.