

SLOVENSKI STANDARD oSIST prEN ISO 8674:2016

01-junij-2016

Šestrobe visoke matice (tip 2) z drobnim metrskim navojem - Razreda izdelave A in B (ISO/DIS 8674:2016)

Hexagon high nuts (style 2), with fine pitch thread - Product grades A and B (ISO/DIS 8674:2016)

iTeh STANDARD PREVIEW

Écrous hexagonaux hauts (style 2), à pas fin Grades A et B (ISO/DIS 8674:2016)

Ta slovenski standard je istoveten z. preN ISO 8674 2016 https://standards.iten.av/catalog/stanklards/sist/2015/08674

8de41521986e/osist-pren-iso-8674-2016

ICS:

21.040.10Metrski navoji21.060.20Matice

Metric screw threads Nuts

oSIST prEN ISO 8674:2016

en,fr

oSIST prEN ISO 8674:2016

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 8674:2016 https://standards.iteh.ai/catalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016

DRAFT INTERNATIONAL STANDARD ISO/DIS 8674

ISO/TC 2/SC 12

Voting begins on: **2016-03-31**

Secretariat: **DIN**

Voting terminates on: 2016-06-29

Hexagon high nuts (style 2), with fine pitch thread — Product grades A and B

Écrous hexagonaux hauts (style 2) à filetage métrique à pas fin — Grades A et B

ICS: 21.060.20

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 8674:2016 https://standards.iteh.ai/catalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016

ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel three month enquiry.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.



Reference number ISO/DIS 8674:2016(E)

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 8674:2016 https://standards.iteh.ai/catalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016



© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is 150/TC 20 Fasteners, Subcommittee SC 12, Fasteners with metric internal thread: //standards.iteh.ai/catalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016

This fourth edition cancels and replaces the third edition (ISO 8674:2012).

This standard differs from ISO 8674:2012 as follows:

- the Scope has been updated;
- M10x1,25 and M20x2 have been moved to the preferred threads table;
- non-preferred threads have been completed;
- for steel nuts, quenching and tempering is specified in accordance with ISO 898-2 as mandatory or optional;
- for steel nuts, the property class 8 has been extended to the whole diameter range;
- the reference to ISO/TR 16224 for nut design has been added;
- stainless steel nuts have been added.

Hexagon high nuts (style 2), with fine pitch thread — Product grades A and B

1 Scope

This International Standard specifies the characteristics of hexagon high nuts (style 2) with fine pitch thread, with nominal diameter from 8 mm through 39 mm, with product grade A for nominal diameters $D \le 16$ mm and product grade B for nominal diameters D > 16 mm.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions

ISO 262, ISO general purpose metric screw threads — Selected sizes for screws, bolts and nuts

ISO 724, ISO general-purpose metric screw threads — Basic dimensions

ISO 898-2, Mechanical properties of fasteners made of carbon steel and alloy steel — Part 2: Nuts with specified property classes — Coarse thread and fine pitch thread

ISO 965-2, ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality OSIST prEN ISO 8674:2016

ISO 3269, Fasteners — Attos://standards.iteh ai/atalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016

ISO 3506-2, Mechanical properties of corrosion-resistant stainless steel fasteners — Part 2: Nuts

ISO 4042, Fasteners — Electroplated coatings

ISO 4759-1, Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C

ISO 6157-2, Fasteners — Surface discontinuities — Part 2: Nuts

ISO 8992, Fasteners — General requirements for bolts, screws, studs and nuts


ISO 10683, Fasteners — Non-electrolytically applied zinc flake coatings

ISO 16048, Passivation of corrosion-resistant stainless-steel fasteners

3 Dimensions

See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

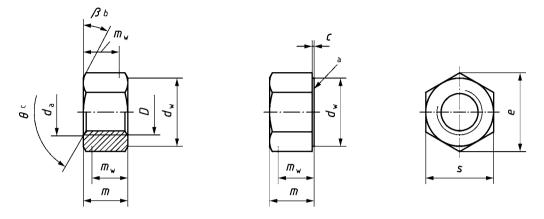

- ^a Unless otherwise specified at the time of order, the nuts are delivered without washer-face.
- ^b $\beta = 15^{\circ}$ to 30°.
- ^c $\theta = 90^{\circ}$ to 120°.

iTeh ST^{Figure}D A RimensionsEVIEW (Table 1 depreferried threads)

	oSIST prEN ISO 8674:2016 Dimensions in millimetres								
	Thread $(D \times P)$	M8 ¥1s://st	an M10×1,25 .a	i/c M112 g 1 55anc	ar M16 x 1,5 79	536 M205×2 0-4	09cM2492	M30×2	M36×3
с	max.	0,60	0,60 ⁸ 0641	521986e/osist 0,60	-pren-iso-86	74-2016 0,80	0,80	0,80	0,80
	min.	0,15	0,15	0,15	0,20	0,20	0,20	0,20	0,20
da	max.	8,75	10,80	13,00	17,30	21,60	25,90	32,40	38,90
	min.	8,00	10,00	12,00	16,00	20,00	24,00	30,00	36,00
d_{w}	min.	11,63	14,63	16,63	22,49	27,70	33,25	42,75	51,11
е	min.	14,38	17,77	20,03	26,75	32,95	39,55	50,85	60,79
m	max.	7,50	9,30	12,00	16,40	20,30	23,90	28,60	34,70
	min.	7,14	8,94	11,57	15,70	19,00	22,60	27,30	33,10
m_{w}	min.	5,71	7,15	9,26	12,56	15,20	18,08	21,84	26,48
s	nom. = max.	13,00	16,00	18,00	24,00	30,00	36,00	46,00	55,00
	min.	12,73	15,73	17,73	23,67	29,16	35,00	45,00	53,80

			-					-		Dimensio		
Th	read $(D \times P)$	M10×1	M12×1,2 5	M14×1,5	M18×2	M18×1,5	M20×1,5	M22×2	M22×1,5	M27×2	M33×2	M39×3
с	max.	0,60	0,60	0,60	0,80	0,80	0,80	0,80	0,80	0,80	0,80	1,00
	min.	0,15	0,15	0,15	0,20	0,20	0,20	0,20	0,20	0,20	0,20	0,30
da	max.	10,80	13,00	15,10	19,50	19,50	21,60	23,70	23,70	29,10	35,60	42,10
	min.	10,00	12,00	14,00	18,00	18,00	20,00	22,00	22,00	27,00	33,00	39,00
d_{w}	min.	14,63	16,63	19,64	24,85	24,85	27,70	31,35	31,35	38,00	46,55	55,86
е	min.	17,77	20,03	23,36	29,56	29,56	32,95	37,29	37,29	45,20	55,37	66,44
	max.	9,30	12,00	14,10	17,60	17,60	20,30	21,80	21,80	26,70	32,50	33,4
т	min.	8,94	11,57	13,40	16,90	16,90	19,00	20,50	20,50	25,40	30,90	31,8
m _w	min.	7,15	9,26	10,72	13,52	13,52	15,20	16,40	16,40	20,32	24,72	25,44
s	nom. = max.	16,00	18,00	21,00	27,00	27,00	30,00	34,00	34,00	41,00	50,00	60,00
	min.	15,73	17,73	20,67	26,16	26,16	29,16	33,00	33,00	40,00	49,00	58,80

Table 2 — Non-preferred threads

Dimensions in millimetres

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 8674:2016 https://standards.iteh.ai/catalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016

4 Requirements and reference International Standards

See Table 3.

International								
Standard	ISO 8992							
Tolerance class	6H ^a							
International Standards	ISO 262, ISO 724, ISO 965-2							
Property class	8 mm $\leq D \leq 16$ mm	8 ^b , 10 ^c , 12 ^c	$8 \text{ mm} \le D \le 24 \text{ mm}$	A2-70, A4-70, A4-80				
	16 mm < <i>D</i> ≤ 39 mm	8 ^c , 10 ^c	$\begin{array}{c} 24 \text{ mm} < D \leq 39 \\ \text{mm} \end{array}$	A2-50, A2-70, A4 70, A4-80				
	D < 8 mm and D > 39 mm	Mechanical properties as agreed ^d	D < 8 mm and D > 39 mm	Mechanical properties as agreed				
International Standard	ISO 898	8-2	ISO 3506-2					
Product grade	NDARD PRE $b \le 16 \text{ mm}$ A							
(sta	ndards.iteh.ai)							
International Standard	ISO 4759-1 IST prEN ISO 8674:2016							
https://standards.iteh.ai/c	Aslprocessedls/sist/2ff95368-6590-409 Clean and bright							
8de4152			A method for passivation is specified in ISO 16048.					
	applied zinc flake coa	tings are						
	Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser.							
			_					
	Acceptance inspection is specified in ISO 3269.							
	International Standards Property class International Standard International Standard International Standard Os https://standards.iteh.ai/os 8de4152	International Standards8mm $\leq D \leq 16$ mmProperty class8mm $\leq D \leq 39$ mm16mm $< D \leq 39$ mm1616mm $< D \leq 39$ mm16mm $< D \leq 39$ mmD < 8	International StandardsISO 262, ISO 72Property class $8 \text{ mm} \le D \le 16 \text{ mm}$ 8^b , 10^c , 12^c $16 \text{ mm} < D \le 39 \text{ mm}$ 8^c , 10^c $16 \text{ mm} < D \le 39 \text{ mm}$ 8^c , 10^c $D < 8 \text{ mm}$ and $D > 39 \text{ mm}$ Mechanical properties as agreed ^d International StandardISO 898-2International StandardISO 898-2International StandardISO 808-2International StandardISO 8674-2016International StandardISO 8674-2016International StandardISO 8674-2016International StandardISO 8674-2016International StandardAsiprocessed Is/sist/2ff95368-6590-409Requirements for electroplating are specified in ISO 4042. Requirements for non-electrolytically applied zinc flake coatings are specified in ISO 10683. Additional requirements or other fm between the supplierLimits for surface discontinuities are specified in ISO 6157-2.Limits for surface discontinuities are specified in ISO 6157-2.	International StandardsISO 262, ISO 724, ISO 965-2Property class8 mm $\leq D \leq 16$ mm 8 mm $\leq D \leq 16$ mm 16 mm $< D \leq 39$ mm8 mm $\leq D \leq 24$ mm mm16 mm $< D \leq 39$ mm 				

Table 3 — Requirements and reference International Standards

May be quenched and tempered at the manufacturer's discretion, in accordance with ISO 898-2.

^c Shall be quenched and tempered in accordance with ISO 898-2.

^d See ISO/TR 16224 for information.

5 Designation

EXAMPLE A hexagon high nut (style 2) with nominal diameter 16 mm, with fine pitch thread 1,5 mm and property class 10 is designated as follows:

Hexagon high nut ISO 8674 - M16 × 1,5 - 10

Bibliography

ISO/TR 16224, Technical aspects of nut design

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 8674:2016 https://standards.iteh.ai/catalog/standards/sist/2ff95368-6590-409c-9fe9-8de41521986e/osist-pren-iso-8674-2016