



SLOVENSKI STANDARD

SIST EN 31:2011+A1:2014

01-julij-2014

Nadomešča:

SIST EN 31:2011

SIST EN 31:2011/kFprA1:2014

Umivalniki - Priključne mere

Wash basins - Connecting dimensions

Waschbecken - Anschlussmaße

Lavabos - Cotes de raccordement

ITEH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 31:2011+A1:2014](http://standards.iteh.ai/catalog/standards/sist/31e874cc-b4c1-4594-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014)

Ta slovenski standard je istoveten z: EN 31:2011+A1:2014

ICS:

91.140.70

Sanitarne naprave

Sanitary installations

SIST EN 31:2011+A1:2014

en,fr,de

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

SIST EN 31:2011+A1:2014

<https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 31:2011+A1

April 2014

ICS 91.140.70

Supersedes EN 31:2011

English Version

Wash basins - Connecting dimensions

Lavabos - Cotes de raccordement

Waschbecken - Anschlussmaße

This European Standard was approved by CEN on 29 July 2011 and includes Amendment 1 approved by CEN on 10 March 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

(standards.iteh.ai)

SIST EN 31:2011+A1:2014

<https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Tap holes	4
3.1 General.....	4
3.2 Connecting dimensions of wash basins with one central tap hole.....	4
3.3 Connecting dimensions of wash basins with side tap hole(s)	6
3.4 Connecting dimensions of wash basins with three tap holes	7
4 Waste outlet hole(s).....	9
4.1 Connecting dimensions of waste outlet hole(s) with integral overflow.....	9
4.2 Connecting dimensions of waste outlet hole without integral overflow	9
5 Fixing dimensions of wall-hung wash basins	11
Annex A (informative) Example of gauge for measuring the connecting dimensions of waste outlet holes.....	13

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 31:2011+A1:2014](https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014)

<https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014>

Foreword

This document (EN 31:2011+A1:2014) has been prepared by Technical Committee CEN/TC 163 “Sanitary appliances”, the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2014, and conflicting national standards shall be withdrawn at the latest by October 2014.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes  EN 31:2011 .

This document includes Amendment 1 approved by CEN on 2014-03-10.

The start and finish of text introduced or altered by amendment is indicated in the text by tags  .

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 31:2011+A1:2014](https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014)

<https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014>

EN 31:2011+A1:2014 (E)

1 Scope

This European Standard specifies the connecting dimensions of wash basins in accordance with EN 14688 regardless of materials used for their manufacture.

NOTE 1 Other connecting dimensions are permitted, e.g. special designs of wash basins, if the manufacturer supplies or recommends the appropriate fitting.

NOTE 2 The shape of the appliance in the figures is for illustration only; it in no way prejudices the final shape of the appliance, which is left to the initiative of the manufacturer.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 14688, *Sanitary appliances - Wash basins - Functional requirements and test methods*

3 Tap holes

3.1 General

The connecting dimensions for tap holes are requirements for wash basins where it is intended to fit a tap.

3.2 Connecting dimensions of wash basins with one central tap hole

The connecting dimensions of wash basins with one central tap hole shall comply with Table 1.

Table 1 — Connecting dimensions of wash basins with one central tap hole (Figure 1)

Designation	Symbol	Dimensions mm
Diameter of the central tap hole (intended to accommodate a mixer tap)	d_2^a	35^{+2}_{-1}
Horizontal distance between the centre line of the central tap hole and the edge of the bowl	g_1	≤ 80
Distance from the centre line of the central tap hole to the back wall	g_3	≥ 55
Radius of a cylinder having the same centre line as the central tap hole at a depth 0 mm to 5 mm from the lower plane of the central tap hole	r_1	≥ 25
Radius of a cylinder having the same centre line as the central tap hole at a depth of minimum 5 mm from the lower plane of the central tap hole	r_2	≥ 30
Radius of a flat plane circular surface on the tap platform having the same centre as the central tap hole and intended to accommodate the tap	r_3	≥ 32

Thickness of the platform at the level of the zone concentric to the central tap hole	s	≤ 18
Horizontal distance between the centre line of the central tap hole and the centre line of the waste outlet hole	t^b	≤ 170
<p>a The diameter 30^{+2}_0 is permissible with $r_1 \geq 22$ and $r_2 \geq 25$.</p> <p>b May not be applicable for wash basins of class CL 00 in accordance with EN 14688.</p>		

Dimensions in millimetres

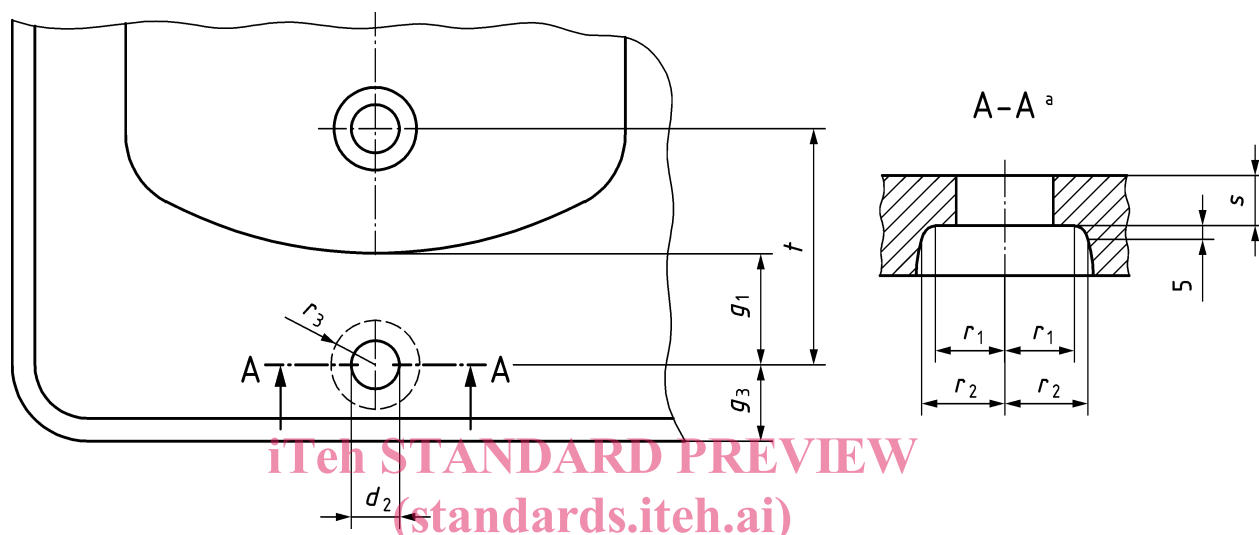


Figure 1 — Connecting dimensions of wash basins with one central tap hole

3.3 Connecting dimensions of wash basins with side tap hole(s)

The connecting dimensions of wash basins with one or two tap holes for side tap(s) shall comply with Table 2.

Table 2 — Connecting dimensions of wash basins with side tap hole(s) (Figure 2)

Designation	Symbol	Dimensions mm
Diameter of the tap hole(s) (intended to accommodate mixer tap(s))	d_2^a	35^{+2}_{-1}
Shortest horizontal distance between the centre line of the tap hole(s) and the edge of the bowl	g_2	≤ 65
Distance from the centre line of the tap hole(s) to the back wall	g_3	≥ 55
Radius of a cylinder having the same centre line as the tap hole at a depth 0 mm to 5 mm from the lower plane of the tap hole	r_1	≥ 25
Radius of a cylinder having the same centre line as the tap hole at a depth of minimum 5 mm from the lower plane of the tap hole	r_2	≥ 30
Radius of a flat plane circular surface on the tap platform having the same centre as the tap hole and intended to accommodate the tap	r_3	≥ 32
Thickness of the platform at the level of the zone concentric to the tap hole(s)	s	≤ 18
Horizontal distance between the centre line of the tap hole(s) and the centre line of the waste outlet hole	t^b	≤ 170

^a The diameter 30^{+2}_0 is permissible with $r_1 \geq 22$, $r_2 \geq 25$ and $r_3 \geq 30$ (intended to accommodate pillar tap(s)).
<https://standards.iteh.ai/catalog/standards/sist/dcef74cc-b4c1-459c-a3fe-5db3b4eb3d57/sist-en-31-2011a1-2014>

^b May not be applicable for wash basins of class CL 00 in accordance with EN 14688.

Dimensions in millimetres

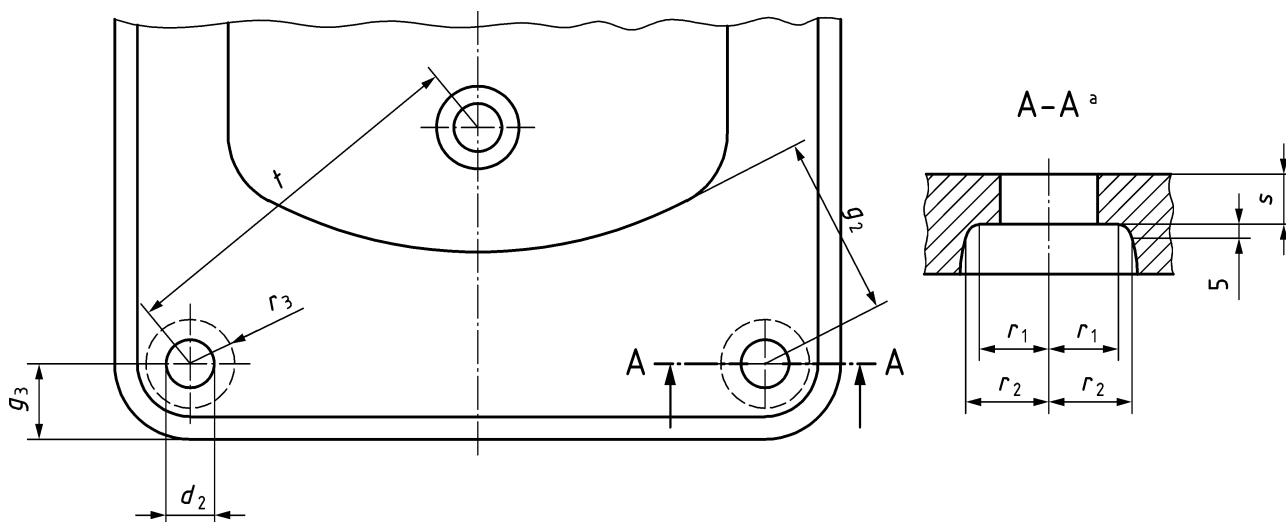


Figure 2 — Connecting dimensions of wash basins with two side tap holes

3.4 Connecting dimensions of wash basins with three tap holes

The connecting dimensions of wash basins with three tap holes shall comply with Table 3.

Table 3 — Connecting dimensions of wash basins with three tap holes (Figure 3)

Designation	Symbol	Dimensions mm
Diameter of outer tap holes	d_1	30^{+2}_0
Diameter of the central tap hole	d_2	35^{+2}_{-1}
Distance from the centre line of the central tap hole to the centre line of the two outer tap holes	e	0 to 15
Distance between the centre lines of the two outer tap holes	f	200 ± 4
Horizontal distance between the centre line of the central tap hole and the edge of the bowl	g_1	≤ 80
Distance from the centre line of the central tap hole to the back wall	g_3	≥ 55
Shortest horizontal distance between the centre lines of the outer tap holes and the edge of the bowl when only the two outer tap holes are used	g_4	≤ 65
Radius of a cylinder having the same centre line as the central tap hole at a depth 0 mm to 5 mm from the lower plane of the tap hole	r_1	≥ 25
Radius of a cylinder having the same centre line as the central tap hole at a depth of minimum 5 mm from the lower plane of the central tap hole	r_2	≥ 30
Radius of a flat plane circular surface on the tap platform having the same centre as the central tap hole and intended to accommodate the tap	r_3	≥ 32
Radius of a flat plane circular surface on the tap platform having the same centre as the outer tap holes and intended to accommodate the side valves	r_4	≥ 30
Thickness of the platform at the level of the zone concentric to the tap holes	s	≤ 18
Horizontal distance between the centre line of the central tap hole and the centre line of the waste outlet hole	t^a	≤ 170
^a May not be applicable for wash basins of class CL 00 in accordance with EN 14688.		