



SLOVENSKI STANDARD
SIST ETS 300 737 E1:2003

01-december-2003

8 [[]HJb]`WV] b]`hY`Y_ca i b]_UW`g_]`g]ghYa `fZUnU&ZL`E`NbcHfU`dUgcj bc`_fa]`Yb`Y`
cXXU`Yb]` `dfY_cX]fb]_cj `fhUbg_cXYf`Yj L]b`df]U] cX]b]_cj ` \]hfcgh]`nUdfca YfbY
_UbUY]nVc`yUbY[U[cj cfUg`dc`bc ` \]hfcghc`fØ: FŁf] GA `\$, " \$Ł

Digital cellular telecommunications system (Phase 2+) (GSM); In-band control of remote transcoders and rate adaptors for Enhanced Full Rate (EFR) and full rate traffic channels (GSM 08.60)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 737 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003)

[https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003)

[4e8ebf95a811/sist-ets-300-737-e1-2003](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003)

Ta slovenski standard je istoveten z: ETS 300 737 Edition 1

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST ETS 300 737 E1:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 737 E1:2003

<https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003>



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 737

March 1997

Source: ETSI TC-SMG

Reference: DE/SMG-020860Q

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



[SIST ETS 300 737 E1:2003](https://standards.itih.ai/catalog/standards/sist/40231149-6c78-4cc5-b327-4c8eb95a811f/sist-ets-300-737-e1-2003)

**Digital cellular telecommunications system (Phase 2+);
Inband control of remote transcoders and rate adaptors for
Enhanced Full Rate (EFR) and full rate traffic channels
(GSM 08.60)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 737 E1:2003

<https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003>

Contents

Foreword	5
1 Scope	7
1.1 Normative references	7
1.2 Abbreviations	8
2 General Approach	9
3 Frame Structure	11
3.1 Speech Frames	11
3.2 O&M Frames	12
3.3 Data Frames	13
3.4 Idle Speech Frames	14
3.5 Coding	14
3.5.1 Coding of Speech Frames	15
3.5.2 Coding of O&M Frames	17
3.5.3 Coding of Data Frames	17
3.5.4 Coding of Idle Speech Frames	18
3.6 Order of Bit Transmission	18
4 Procedures	18
4.1 Remote Control of Transcoders and Rate Adaptors	18
4.2 Resource Allocation	19
4.3 Resource Release	19
4.4 In Call Modification	19
4.5 Transfer of Idle Frames	19
4.5.1 In Full rate data case	19
4.5.2 In Full rate speech case	19
4.5.3 In Enhanced Full rate speech case	20
4.6 Procedures for Speech Frames	20
4.6.1 Time Alignment of Speech Frames	20
4.6.1.1 Initial Time Alignment State	20
4.6.1.2 The Static Time Alignment State	21
4.6.1.3 Initiation at Resource Allocation	23
4.6.1.4 Time Alignment During Hand over	23
4.6.1.4.1 BSS External Hand over	23
4.6.1.4.2 BSS Internal Hand over	23
4.6.2 Procedures for Discontinuous Transmission (DTX)	23
4.6.2.1 DTX procedures in the uplink direction	23
4.6.2.2 DTX procedures in the downlink direction	24
4.7 Procedures for Data Frames	24
4.7.1 The RAA Function	25
4.7.2 The RA1/RA1' Function	26
4.7.3 The RA2 Function	26
4.7.4 Procedures for 8 kbit/s intermediate rate adaption rate	26
4.7.5 Procedures for 16 kbit/s intermediate rate adaption rate	26
4.7.6 Support of Non-Transparent Bearer Applications	26
4.8 Frame Synchronization	26
4.8.1 Search for Frame Synchronization	26
4.8.2 Frame Synchronization After Performing Downlink Timing Adjustments	26
4.8.3 Frame Synchronization Monitoring and Recovery	27
4.9 Correction/detection of bit errors on the terrestrial circuits	27
4.9.1 Error Detection on the Control Bits	27
4.9.1.1 General Procedure	27
4.9.1.2 Speech Frames	28
4.9.2 Handling of frames received with errors	28
4.9.2.1 In case of Full Rate	28

	4.9.2.2	In case of Enhanced Full rate	28
4.10		Procedures for Operation & Maintenance.....	28
	4.10.1	Transfer of O&M Information Between the TRAU and the BSC.....	29
	4.10.2	Procedures in the TRAU.....	29
	4.10.3	Procedures in the BSC	29
	4.10.3.1	Use of O&M Frames	29
	4.10.4	Procedures in the BTS.....	30
History			31

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 737 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS specifies the inband control of remote transcoders and rate adaptors for full rate speech, Enhanced Full rate speech and full rate data within the digital cellular telecommunications system (Phase 2+).

This ETS corresponds to GSM technical specification, GSM 08.60 version 5.0.3.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE Rules.

Transposition dates	
Date of adoption:	28 February 1997
Date of latest announcement of this ETS (doa):	30 June 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 December 1997
Date of withdrawal of any conflicting National Standard (dow):	31 December 1997

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 737 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 737 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8ebf95a811/sist-ets-300-737-e1-2003>

1 Scope

When 64 kbit/s traffic channels are used on the Abis interface, the speech shall be coded according to CCITT Recommendation G.711 and the data rate adaptation shall be as specified in GSM 04.21 and GSM 08.20.

In the case where 16 kbit/s traffic channels are used for full rate speech or enhanced full rate speech or full rate data service, then this specification shall apply for frame structure and for control of remote transcoders and additional rate adaptors.

The use and general aspects of the Abis interface are given in GSM 08.51.

NOTE: This ETS should be considered together with the GSM 06 series of specifications, GSM 04.21 (Rate Adaptation on the MS-BSS Interface) and GSM 08.20 (Rate Adaptation on the BS/MSB Interface).

1.1 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 100): "Digital cellular telecommunications system (Phase 2); Abbreviations and acronyms".
- [2] GSM 04.06 (ETS 300 555): "Digital cellular telecommunications system (Phase 2); Mobile Station - Base Station System (MS - BSS) interface Data Link (DL) layer specification".
- [3] GSM 04.21 (ETS 300 562): "Digital cellular telecommunications system (Phase 2); Rate adaption on the Mobile Station - Base Station System (MS - BSS) interface".
- [4] GSM 06.01 (ETS 300 580-1): "Digital cellular telecommunications system (Phase 2); Full rate speech processing functions".
- [5] GSM 06.10 (ETS 300 580-2): "Digital cellular telecommunications system (Phase 2); Full rate speech transcoding".
- [6] GSM 06.11 (ETS 300 580-3): "Digital cellular telecommunications system (Phase 2); Substitution and muting of lost frames for full rate speech channels".
- [7] GSM 06.12 (ETS 300 580-4): "Digital cellular telecommunications system (Phase 2); Comfort noise aspect for full rate speech traffic channels".
- [8] GSM 06.31 (ETS 300 580-5): "Digital cellular telecommunications system (Phase 2); Discontinuous Transmission (DTX) for full rate speech traffic channel".
- [9] GSM 06.32 (ETS 300 580-6): "Digital cellular telecommunications system (Phase 2); Voice Activity Detection (VAD)".
- [10] GSM 08.20 (ETS 300 591): "Digital cellular telecommunications system (Phase 2); Rate adaption on the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".
- [11] GSM 08.51 (ETS 300 592): "Digital cellular telecommunications system (Phase 2); Base Station Controller - Base Transceiver Station (BSC - BTS) interface General aspects".

- [12] GSM 08.54 (ETS 300 594): "Digital cellular telecommunications system (Phase 2); Base Station Controller - Base Transceiver Station (BSC - BTS) interface Layer 1 structure of physical circuits".
- [13] GSM 08.58 (ETS 300 596): "Digital cellular telecommunications system (Phase 2); Base Station Controller - Base Transceiver Station (BSC - BTS) interface Layer 3 specification".
- [14] GSM 12.21 (ETS 300 623): "Digital cellular telecommunications system (Phase 2); Network Management (NM) procedures and message on the A-bis interface".
- [15] CCITT Recommendation G.711: "Pulse Code Modulation (PCM) of voice frequencies".
- [16] CCITT Recommendation I.460: "Multiplexing, rate adaption and support of existing interfaces".
- [17] CCITT Recommendation V.110: "Support of Data Terminal Equipments (DTEs) with V-Series interfaces by an Integrated Services Digital Network (ISDN)".
- [18] GSM 06.51 (ETS 300 723): "Digital cellular telecommunications system; Enhanced Full rate speech processing functions".
- [19] GSM 06.60 (ETS 300 726): "Digital cellular telecommunications system; Enhanced Full rate speech transcoding".
- [20] GSM 06.61 (ETS 300 727): "Digital cellular telecommunications system; Substitution and muting of lost frames for Enhanced Full rate speech channels".
- [21] GSM 06.62 (ETS 300 728): "Digital cellular telecommunications system; Comfort noise aspect for Enhanced Full rate speech traffic channels".
- [22] GSM 06.81 (ETS 300 729): "Digital cellular telecommunications system; Discontinuous Transmission (DTX) for Enhanced Full rate speech traffic channel".
- [23] GSM 06.82 (ETS 300 730): "Digital cellular telecommunications system; Voice Activity Detection (VAD)".

1.2 Abbreviations

Abbreviations used in this ETS are listed in GSM 01.04

2 General Approach

When the transcoders/rate adaptors are positioned remote to the BTS, the information between the Channel Codec Unit (CCU) and the remote Transcoder/Rate Adaptor Unit (TRAU) is transferred in frames with a fixed length of 320 bits (20 mS). In this specification, these frames are denoted "TRAU frames". Within these frames, both the speech/data and the TRAU associated control signals are transferred.

The Abis interface should be the same if the transcoder is positioned 1) at the MSC site of the BSS or if it is positioned 2) at the BSC site of the BSS. In case 1), the BSC should be considered as transparent for 16 kbit/s channels.

When data is adapted to the 320 bit frames, a conversion function is required in addition to the conversion/rate adaption specified in GSM 08.20. This function constitute the RAA.

The TRAU is considered a part of the BSC, and the signalling between the BSC and the TRAU (e.g. detection of call release, hand over and transfer of O&M information) may be performed by using BSC internal signals. The signalling between the CCU and the TRAU, using TRAU frames as specified in this specification, is mandatory when the Abis interface is applied.

NOTE: If standard 64 kbit/s switching is used in the BSC, multiplexing according to CCITT Recommendation I.460 should apply at both sides of the switch.

In figure 2.1, a possible configuration of the TRAU and the CCU is shown.


The functions inside the TRAU are:

- "Remote Transcoder and Rate Adaptor Control Function" (RTRACF);
- "Remote Speech Handler Function" (RSHF);
- The RAA function;
- The RA2 function;
- The transcoder function.

The functions inside the CCU are: [SIST ETS 300 737 E1:2003](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8cb95a811/sist-ets-300-737-e1-2003)
[https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-](https://standards.iteh.ai/catalog/standards/sist/4023a449-6c78-4cc5-b327-4e8cb95a811/sist-ets-300-737-e1-2003)

- "Transcoder and Rate Adaptor Control Function" (TRACF);
- "Speech Handler Function" (SHF);
- The RAA function;
- The RA1/RA1' function;
- The channel codec function.

This specification will not describe the procedures inside the TRAU and the CCU. The layout in figure 2.1 is only intended as a reference model.

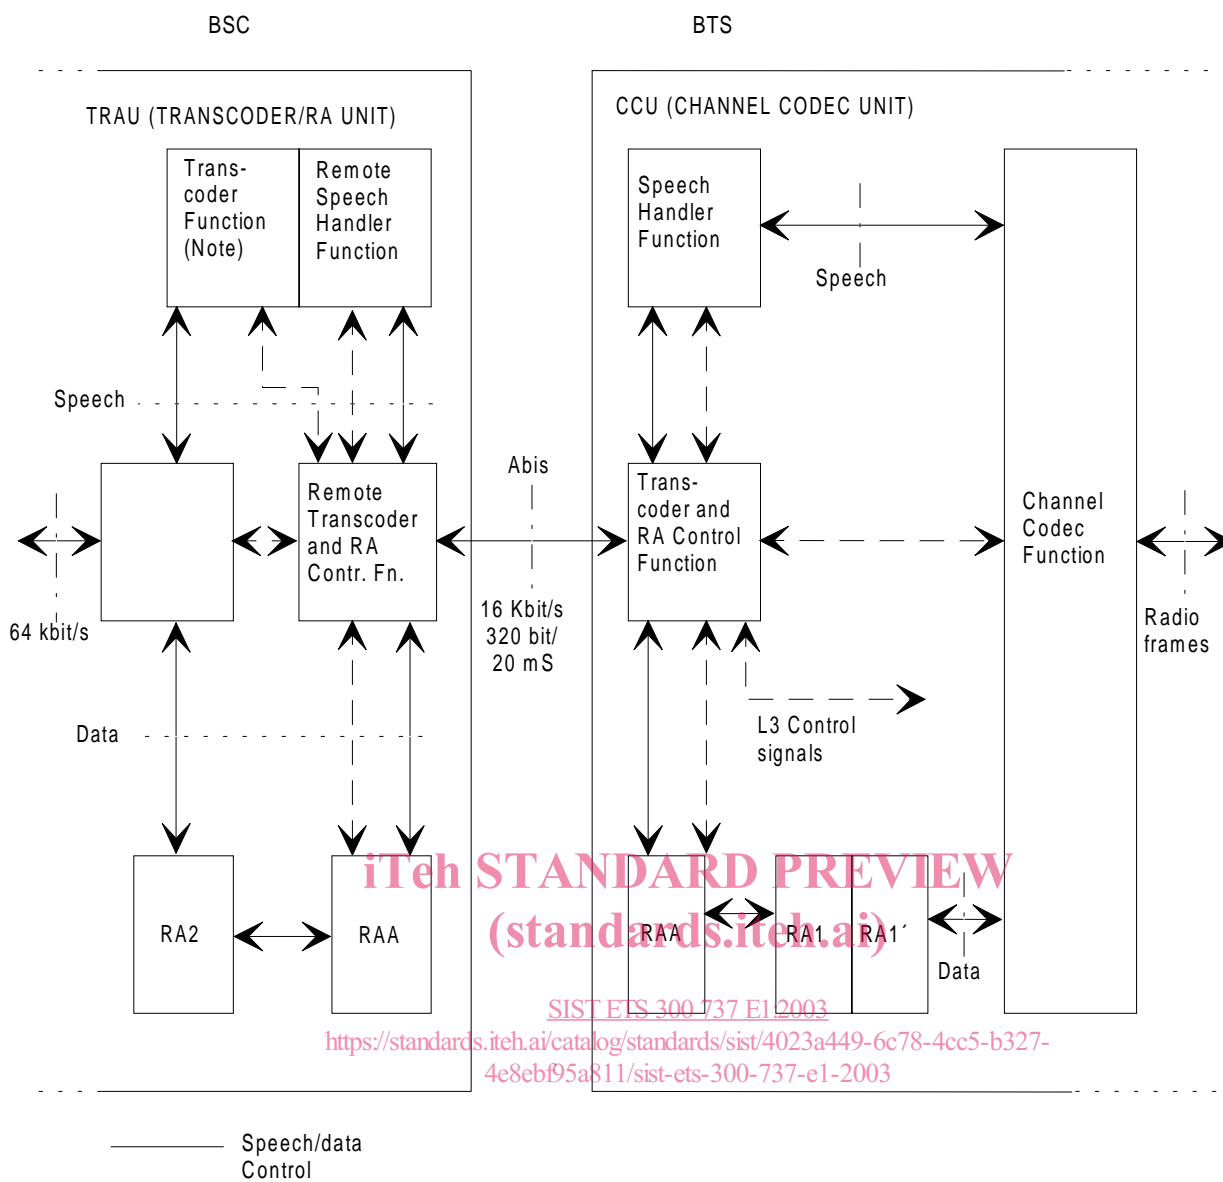

NOTE: This recommendation assumes the DTX handler function to be a part of the Transcoder Function.

Figure GSM 08.60/2.1: Functional entities for handling of remote control of remote transcoders and rate adaptors