

SLOVENSKI STANDARD

SIST EN 4128:2016

01-maj-2016

Nadomešča:

SIST EN 4128:2009

Aeronavtika - Sorniki, normalna šestroba glava, široka toleranca, kratek navoj, iz toplotnoodporne zlitine na nikljevi osnovi, prevlečeni z aluminijem IVD - Klasifikacija: 1250 MPa (pri temperaturi okolice) / 425 °C

Aerospace series - Bolts, normal hexagonal head, coarse tolerance shank, short thread, in heat resisting nickel base alloy, aluminium IVD coated - Classification: 1 250 MPa (at ambient temperature) / 425 °C

Luft- und Raumfahrt - Sechskantschrauben, kurzes Gewinde, aus hochwarmfester Nickelbasislegierung, Aluminium IVD beschichtet - Klasse: 1 250 MPa (bei Raumtemperatur) / 425 °C

iteh STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/d9c8d26e-f8e6-4961-bafb-b6b9eff81771/sist-en-4128-2016>

Série aérospatiale - Vis à tête hexagonale normale, fût à tolérance large, filetage court, en alliage résistant à chaud à base de nickel, revêtues aluminium IVF - Classification: 1 250 MPa (à température ambiante) / 425 °C

Ta slovenski standard je istoveten z: EN 4128:2016

ICS:

49.025.20	Aluminij	Aluminium
49.030.20	Sorniki, vijaki, stebelni vijaki	Bolts, screws, studs

SIST EN 4128:2016

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4128:2016](#)

<https://standards.iteh.ai/catalog/standards/sist/d9c8d26e-f8e6-4961-bafb-b6b9eff81771/sist-en-4128-2016>

EUROPEAN STANDARD

EN 4128

NORME EUROPÉENNE

EUROPÄISCHE NORM

March 2016

ICS 49.030.20

Supersedes EN 4128:2009

English Version

Aerospace series - Bolts, normal hexagonal head, coarse tolerance shank, short thread, in heat resisting nickel base alloy, aluminium IVD coated - Classification: 1 250 MPa (at ambient temperature) / 425 °C

Série aérospatiale - Vis à tête hexagonale normale, fût à tolérance large, filetage court, en alliage résistant à chaud à base de nickel, revêtues aluminium IVD - Classification: 1 250 MPa (à température ambiante) / 425 °C

Luft- und Raumfahrt - Sechskantschrauben, kurzes Gewinde, aus hochwarmfester Nickelbasislegierung, Aluminium IVD beschichtet - Klasse: 1 250 MPa (bei Raumtemperatur) / 425 °C

This European Standard was approved by CEN on 27 September 2015.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
European Foreword.....	3
1 Scope.....	4
2 Normative references.....	4
3 Required characteristics	5
4 Designation.....	8
5 Marking.....	8
6 Technical specification.....	8
Annex A (informative) Standard evolution form.....	10

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 4128:2016](https://standards.iteh.ai/catalog/standards/sist/d9c8d26e-f8e6-4961-bafb-b6b9eff81771/sist-en-4128-2016)

<https://standards.iteh.ai/catalog/standards/sist/d9c8d26e-f8e6-4961-bafb-b6b9eff81771/sist-en-4128-2016>

European Foreword

This document (EN 4128:2016) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by September 2016, and conflicting national standards shall be withdrawn at the latest by September 2016.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 4128:2009.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

EN 4128:2016 (E)**1 Scope**

This European Standard specifies the characteristics of bolts, normal hexagonal head, coarse tolerance shank, short thread, in heat resisting nickel base alloy, aluminium IVD coated.

Classification: 1 250 MPa¹⁾ / 425 °C²⁾.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2424, *Aerospace series — Marking of aerospace products*

EN 6118, *Aerospace series — Process specification — Aluminium base protection for fasteners*

EN 9100, *Quality Management Systems — Requirements for Aviation, Space and Defense Organizations*

EN 9133, *Aerospace series — Quality management systems — Qualification procedure for aerospace standard parts*

ISO 3193, *Aerospace — Bolts, normal hexagonal head, normal shank, short or medium length MJ threads, metallic material, coated or uncoated, strength classes less than or equal to 1 100 MPa — Dimensions*

ISO 3353-1, *Aerospace — Lead and runout threads — Part 1: Rolled external threads*

ISO 5855-2, *Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts*

ISO 7913, *Aerospace — Bolts and screws, metric — Tolerances of form and position*

ISO 9154, *Aerospace — Bolts, with MJ threads, made of heat-resistant nickel-based alloy, strength class 1 550 MPa — Procurement specification*

TR 3775, *Aerospace series — Bolts and pins — Materials*

MIL-DTL-83488, *Coating, aluminium, high purity*

1) Minimum tensile strength of the material at ambient temperature.

2) Maximum temperature that the bolt can withstand without continuous change in its original characteristics, after return to ambient temperature. The maximum temperature is determined by the surface treatment.

3 Required characteristics

3.1 Configuration — Dimensions — Masses

See Figure 1 and Table 1.

Dimensions and tolerances are: in conformity with ISO 3193, expressed in millimetres and apply after surface treatment.

Details of form not stated are left to the manufacturer's discretion.

3.2 Tolerances of form and position

ISO 7913.

3.3 Materials

TR 3775: heat resisting nickel base alloy, strength class 1 250 MPa

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 4128:2016](https://standards.iteh.ai/catalog/standards/sist/d9c8d26e-f8e6-4961-bafb-b6b9eff81771/sist-en-4128-2016)

<https://standards.iteh.ai/catalog/standards/sist/d9c8d26e-f8e6-4961-bafb-b6b9eff81771/sist-en-4128-2016>

EN 4128:2016 (E)


3.4 Surface treatment

MIL-DTL-83488, type II, class 3, thickness 4 µm to 12 µm, or EN 6118. After aluminium deposit:

- mechanical blasting, followed by a chromate conversion coating within 24 h max.³⁾;
- optional lubrication with cethylic alcohol (code E).

$$\sqrt{\text{Ramax } 3,2} \left[\sqrt{\text{Ramax } 1,6} \quad \sqrt{\text{Ramax } 0,8} \right] \text{ Values in micrometres apply prior to surface treatment.}$$

Break sharp edges 0,1 to 0,4.

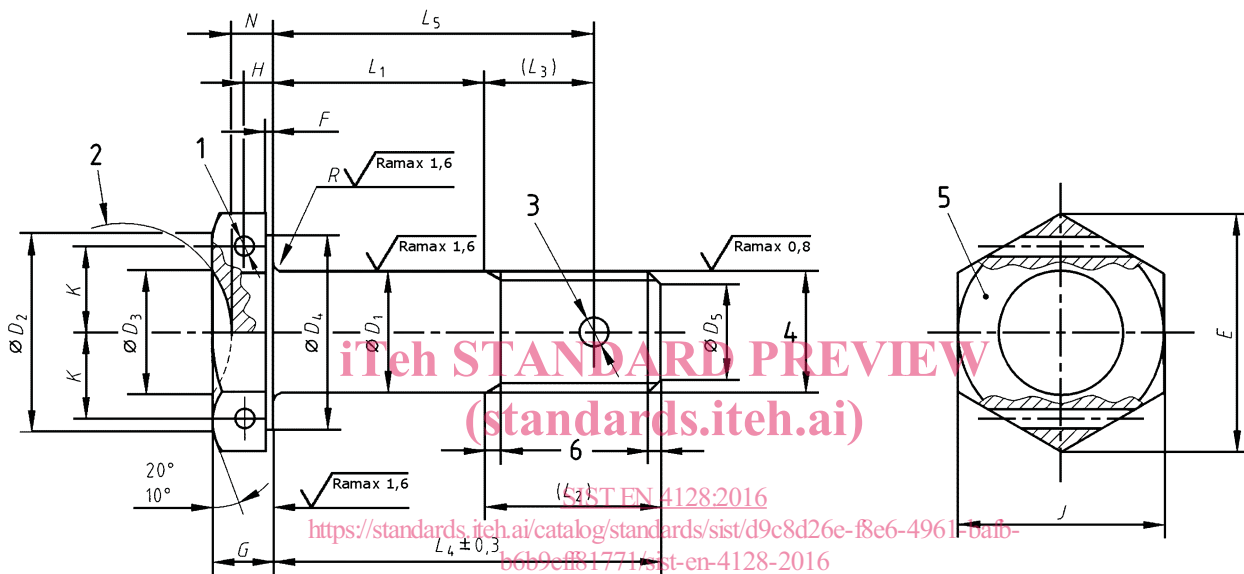

Key

- 1 Two holes $\varnothing D_6$ (optional, see Table 2)
- 2 Continuous surface
- 3 One hole $\varnothing D_7$ (optional, see Table 2)
- 4 Thread
- 5 Marking
- 6 Conforms to ISO 3353-1

Figure 1

³⁾ Products used shall be in conformity with national regulation into force.

Table 1

Diameter code	Thread ^a	D_1	D_2	D_3	D_4^b	D_5		D_6	D_7	E	F		G	H		
		h12	min.	0 - 0,5	min.	nom.	Tol.	H13	H13	min.	max.	min.	0 - 0,3			
030	MJ3×0,5 - 4h6h	3	5,5	—	5,4	2,3	0 - 0,5	—	—	6,5	0,4	0,2	2,0	—		
040	MJ4×0,7 - 4h6h	4	6,4	—	6,4	3,0		—	1,1	7,6			2,5	—		
050	MJ5×0,8 - 4h6h	5	7,4	5,25	7,4	3,4	± 0,5	1,0	1,5	8,7	0,5	0,2	3,0	1,35		
060	MJ6×1 - 4h6h	6	9,4	6,25	9,3	4,2		1,4		1,9			10,9	3,5	1,60	
070	MJ7×1 - 4h6h	7	10,3	7,25	10,2	5,2			1,6				2,4	12,0	4,0	1,85
080	MJ8×1 - 4h6h	8	12,3	8,25	12,2	6,2		1,6		3,0				14,3	4,5	2,10
100	MJ10×1,25 - 4h6h	10	16,3	10,25	16,0	7,9			1,6				3,0	18,9	0,6	0,3
120	MJ12×1,25 - 4h6h	12	18,3	12,25	18,0	9,8		1,6		3,8				21,1		
140	MJ14×1,5 - 4h6h	14	21,3	14,25	21,0	11,5			1,6				3,8	24,5		
160	MJ16×1,5 - 4h6h	16	23,3	16,25	23,0	13,5		1,6		3,8				26,8		
180	MJ18×1,5 - 4h6h	18	26,3	18,25	26,0	15,5			1,6				3,8	30,2		
200	MJ20×1,5 - 4h6h	20	29,3	20,25	29,0	17,5		1,6		3,8				33,6		

Diameter code	J		K	$L_1 \pm 0,2^{c,d}$		L_2	L_3	N	R		Mass ^e	
	nom.	Tol.		Code	nom.				0 - 0,3	max.	min.	f
030	6	h12	—	002 to 030	2 to 30	6,0	—	—	0,4	0,2	0,896	0,057
040	7		—	002 to 040	2 to 40	7,5	5,0	—			1,711	0,101
050	8		3,25	003 to 050	3 to 50	9,0	6,0	2,0	0,5	0,3	3,000	0,158
060	10	h13	4,10	003 to 060	3 to 60	10,0	7,0	2,3	0,7	0,5	5,607	0,228
070	11		4,50	004 to 070	4 to 70	11,0		2,7			7,679	0,311
080	13		5,35	004 to 080	4 to 80	11,5	7,5	3,0	0,8	0,6	11,565	0,407
100	17		7,10	005 to 100	5 to 100	14,5	9,0	3,4			22,451	0,635
120	19		7,90	006 to 120	6 to 120	16,0	10,0	4,0			0,9	35,892
140	22		9,20	007 to 140	7 to 140	19,0	12,0	4,7	1,1	0,8	55,262	1,245
160	24		10,05	008 to 160	8 to 160	20,5	12,5	5,4			80,815	1,628
180	27		11,30	009 to 180	9 to 180	22,5	14,5	6,0	1,3	1,0	113,885	2,059
200	30		12,60	010 to 200	10 to 200	24,5	15,0	6,7			155,797	2,541