
Road vehicles — Fuse-links —

Part 3:

**Fuse-links with tabs (blade type) Type C
(medium), Type E (high current) and
Type F (miniature)**

Véhicules routiers — Liaisons fusibles —

*Partie 3: Liaisons fusibles à languette (type plat) type C (moyen), type E
(courant fort) et type F (miniature)*

ISO 8820-3:2010

<https://standards.iteh.ai/catalog/standards/sist/5c31afd3-d5ca-4181-9023-05015b736dae/iso-8820-3-2010>



Reference number
ISO 8820-3:2010(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8820-3:2010

<https://standards.iteh.ai/catalog/standards/sist/5c31afd3-d5ca-4181-9023-05015b736dae/iso-8820-3-2010>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Marking, labelling and colour coding	2
5 Tests and requirements	2
5.1 General	2
5.2 Test sequence	3
5.3 Test cable sizes	3
5.4 Voltage drop	5
5.5 Transient current cycling	7
5.6 Environmental conditions	7
5.7 Operating time rating	7
5.8 Current steps	8
5.9 Breaking capacity	8
5.10 Strength of terminals	11
5.11 Temperature rise	12
6 Dimensions	13
6.1 Fuse-links Types C, E and F	13
6.2 Designation example	15
Annex A (informative) Temperature rise test	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8820-3 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This third edition cancels and replaces the second edition (ISO 8820-3:2002), which has been technically revised.

ISO 8820 consists of the following parts, under the general title *Road vehicles — Fuse-links*:

- *Part 1: Definitions and general test requirements*
- *Part 2: User's guide*
- *Part 3: Fuse-links with tabs (blade type) Type C (medium), Type E (high current) and Type F (miniature)*
- *Part 4: Fuse-links with female contacts (type A) and bolt-in contacts (type B) and their test fixtures*
- *Part 5: Fuse-links with axial terminals (Strip fuse-links) Types SF 30 and SF 51 and test fixtures*
- *Part 6 Single-bolt fuse-links*
- *Part 7: Fuse-links with tabs (Type G) with rated voltage of 450 V*

The following parts are under preparation:

- *Part 8: Fuse-links with bolt-in contacts (Type H and J) with rated voltage of 450 V*
- *Part 9: Fuse-links with shortened tabs (Type D)*

Road vehicles — Fuse-links —

Part 3:

Fuse-links with tabs (blade type) Type C (medium), Type E (high current) and Type F (miniature)

1 Scope

This part of ISO 8820 specifies fuse-links with tabs (blade-type) Type C (medium), Type E (high current) and Type F (miniature) for use in road vehicles. It establishes, for these fuse-link types, the rated current, test procedures, performance requirements and dimensions.

This part of ISO 8820 is applicable for fuse-links with a rated voltage of 32 V or 58 V, a current rating of ≤ 100 A and a breaking capacity of 1 000 A intended for use in road vehicles.

This part of ISO 8820 is intended to be used in conjunction with ISO 8820-1 and ISO 8820-2. The numbering of its clauses corresponds to that of ISO 8820-1, whose requirements are applicable, except where modified by requirements particular to this part of ISO 8820.

2 Normative references

[ISO 8820-3:2010](#)

[standards.iteh.ai/catalog/standards/sist/5c31afd3-d5ca-4181-9023-05015b736dae/iso-8820-3-2010](#)

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 6722, *Road vehicles — 60 V and 600 V single-core cables — Dimensions, test methods and requirements*

ISO 8820-1, *Road vehicles — Fuse-links — Part 1: Definitions and general test requirements*

ISO 8820-2, *Road vehicles — Fuse-links — Part 2: User's guide*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 8820-1 apply.

4 Marking, labelling and colour coding

See ISO 8820-1 and Table 1.

Table 1 — Fuse-link colour coding

Current rating A	Colour
1	black
2	grey
3	violet
4	pink
5	tan/light brown
7,5	brown
10	red
15	blue
20	yellow
25	white ^a
30	green
35	dark green
40	orange
50	red
60	blue
70	brown
80	white ^a
100	violet

^a For transparent fuse bodies, "white" means no colour is added to the plastic material.

5 Tests and requirements

5.1 General

In addition to carrying out the test procedures in accordance with ISO 8820-1, the following criteria apply.

Tests shall be performed following the test sequences in Table 2.

The test fixtures for electrical tests shall be designed in accordance with Figure 1. The connection resistance shall be $\leq 0,8 \text{ m}\Omega$ for Type C (medium) and Type F (miniature) fuse-links and $\leq 0,35 \text{ m}\Omega$ for Type E (high current) fuse-links to ensure the proper function of the test fixture.

Fuse-links in accordance with this part of ISO 8820 shall provide for visible evidence of an open fuse element.

5.2 Test sequence

Table 2 — Test sequence

No.	Test	(Sub-)clause	Sample groups						
			1	2	3	4	5	6	7
1	Dimensions	6	X	X	X	—	—	—	—
2	Marking, labelling and colour coding	4	X	X	X	X	X	X	X
3	Fuse-link voltage drop	5.2	X	X	X	—	—	—	—
4	Strength of terminals	5.8	X	X	X	—	—	—	—
5	Environmental conditions	Climatic load	—	—	—	X	—	—	—
6		Chemical load	—	—	—	—	X	—	—
7		Mechanical load	—	—	—	—	—	X	—
8	Transient current cycling	5.3	—	—	—	—	—	—	X
9	Fuse-link voltage drop	5.2	—	—	—	X	X	X	X
10	Current steps	5.6	—	—	X	—	—	—	—
11	Breaking capacity	5.7	X	—	—	—	—	—	—
12	Operating time rating test	I_R or $1,10 I_R^a$	—	X	—	X	X	X	X
		$1,10 I_R^a$	—	Y	—	Y	Y	Y	Y
		$1,35 I_R^a$	—	Y	—	Y	Y	Y	Y
		$1,60 I_R$	—	Y	—	Y	Y	Y	Y
		$2,00 I_R$	—	Y	—	Y	Y	Y	Y
		$3,50 I_R$	—	Y	—	Y	Y	Y	Y
		$6,00 I_R$	—	Y	—	Y	Y	Y	Y
13	Strength of terminals	5.8	X	X	X	X	X	X	X

Each sample group shall contain a minimum of 10 fuse-links for each rated current rating.

For the operating time rating tests marked “Y”, the sample groups 2, 4, 5, 6 and 7 shall be divided equally. These fuse-links are intended to be subjected to a single operating time-rating test only.

NOTE A dash (—) indicates that the test is not required.

^a Not required for 100 A fuse-link.

5.3 Test cable sizes

Test cable sizes shall be as given in Table 3. All tests for a particular fuse-link rating shall be performed using the same cable size.

Test cable sizes are specified to allow comparative fuse-link tests to be carried out. The cable size specified does not necessarily indicate the size of cable to be used in the vehicle application.

Table 3 — Test cable sizes

Rated current, I_R A	Conductor cross-sectional area ^a mm ²			Length mm
	Type F	Type C	Type E	
1	0,35	0,35	X	500 ± 50
2				
3				
4				
5	0,5	0,5		
7,5	0,75	0,75		
10	1,0	1,0		
15	1,5	1,5		
20	2,5	2,5	4,0	
25				
30				
35	X	6,0		
40				
50			6,0	
60			6,0	
70			10,0	
80			10,0	
100	16,0	16,0		

iTeh STANDARD PREVIEW
(standards.iteh.ai)


ISO 8820-3:2010
<https://standards.iteh.ai/catalog/standards/sist/5c31afd3-d5ca-4181-9023-05015b736dae/iso-8820-3-2010>

^a Conductor material according ISO 6722.

5.4 Voltage drop

5.4.1 Tests

The voltage drop U_{AB} shall be measured at points A and B across the fuse-link tabs as shown in Figure 1.

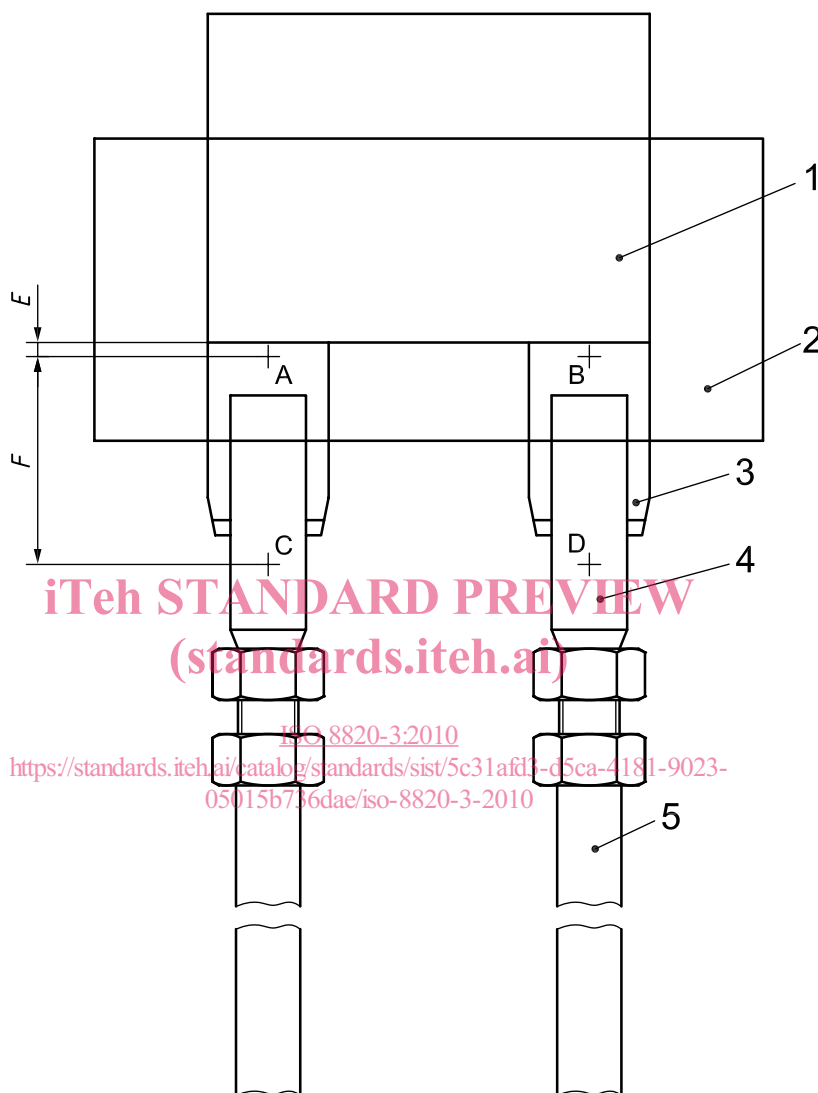

Key

- 1 fuse-link
- 2 test fixture
- 3 fuse blade
- 4 test clip (cantilevered contact system, receptacle to accept tabs as defined in Table 7)
- 5 cable (size in accordance with Table 3)

E $(1,5 \pm 0,5)$ mm

F $(15,5 \pm 1)$ mm for miniature and medium fuse-links; $(28,0 \pm 1)$ mm for high current fuse-links

NOTE Points A and B are the measuring points for the voltage drop. Points A, C and B, D are the measuring points for connection resistance.

Figure 1 — Test schematic (Types C, E and F)

5.4.2 Requirements

See Table 4.

Table 4 — Voltage drop

Fuse rating A	Maximum voltage drop, U_{AB} mV
1	250
2	225
3	200
4	
5	175
7,5	150
10	140
15	125
20	
25	
30	120
35	
40	
50	
60	110
70	
80	
100	


iteh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8820-3:2010
<https://standards.iteh.ai/catalog/standards/sist/5c31afd3-d5ca-4181-9023-05015b736dae/iso-8820-3-2010>

5.5 Transient current cycling

5.5.1 Test

See Figure 2 and ISO 8820-1. At an elapsed time of 0,025 s on-time, the current shall fall to a value between $1,65 I_R$ and $2,5 I_R$. At no time during the first 4,5 s of each cycle shall the steady state current fall below $0,9 I_R$.

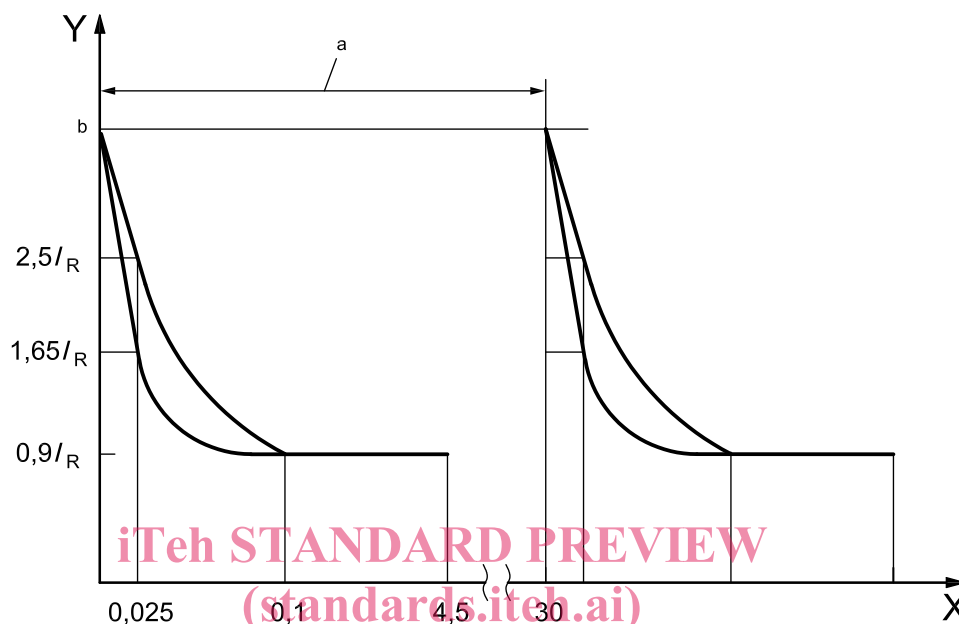

Key

X time (s)

Y current

a One cycle.

b $(5,6 \dots 6) I_R$ for $I_R > 5$ A; $(4,6 \dots 5) I_R$ for $I_R \leq 5$ A.

ISO 8820-3:2010

<https://standards.iteh.ai/catalog/standards/sist/5c31afd3-d5ca-4181-9023-05015b736dae/iso-8820-3-2010>

Figure 2 — Transient current cycling

5.5.2 Requirements

See ISO 8820-1.

5.6 Environmental conditions

See ISO 8820-1.

5.7 Operating time rating

5.7.1 Test

See ISO 8820-1. For I_R the test duration is 100 h.