
Digitalno omrežje z integriranimi storitvami (ISDN) - ISDN - globalni sistem mobilnih komunikacij (GSM) - Signalizacijski vmesnik javnega kopenskega mobilnega omrežja (PLMN)

Integrated Services Digital Network (ISDN); ISDN - Global System for Mobile communications (GSM) Public Land Mobile Network (PLMN) signalling interface

Ta slovenski standard je istoveten z: ETS 300 303/C2 E1.% - *!\$%

ICS:


33.080

Digitalno omrežje z
integriranimi storitvami
(ISDN)

Integrated Services Digital
Network (ISDN)

DSIST ETS 300 303:1997/C2:1999

en

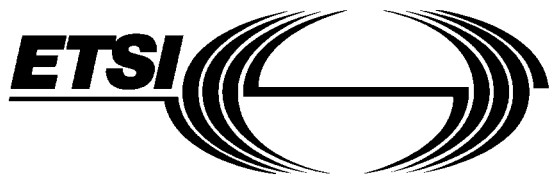

CORRIGENDUM

ETS 300 303

January 1996

Source: ETSI TC-SPS

Reference: DE/SPS-01008

ICS: 33.080

Key words: ISDN, SS7, ISUP, GSM, mobile, radio, PLMN, interworking

**This corrigendum modifies
the European Telecommunication Standard ETS 300 303 (1994)**

**Integrated Services Digital Network (ISDN);
ISDN - Global System for Mobile communications (GSM)
Public Land Mobile Network (PLMN) signalling interface**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Foreword

This second corrigendum corrects several editorial mistakes in annex C of ETS 300 303 (1994). It includes the changes contained in the first corrigendum.

Amendments

Page 16, subclause C.3.2, figure C.2

Replace figure C.2 by the following figure:

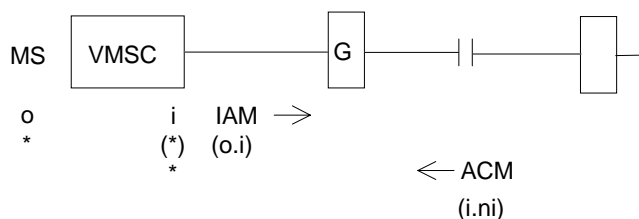


Figure C.2

Page 18, subclause C.3.10 and figure C.10

Replace subclause C.3.10 and figure C.10 by the following:

C.3.10 Call with no outgoing echo control device included in a preceding exchange forwarded by the VMSC to the fixed network with no echo control device in the terminating network

The VMSC knows that an outgoing half echo control device is not necessary.

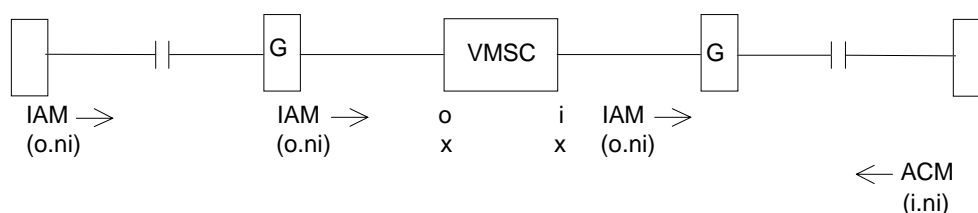


Figure C.10

Page 18, subclause C.3.11 and figure C.11

Replace subclause C.3.11 and figure C.11 by the following:

C.3.11 Call with no outgoing echo control device included in a preceding exchange forwarded by the VMSC to the fixed network with echo control device in the terminating network

The VMSC knows that an outgoing half echo control device is not necessary.

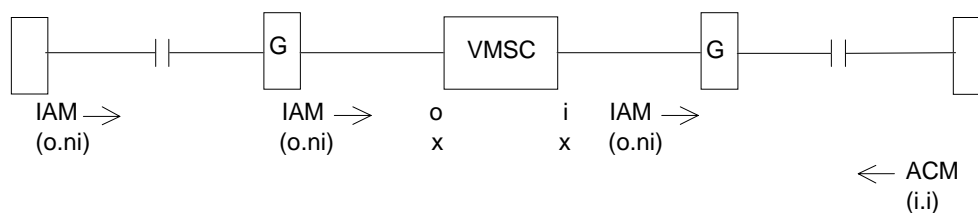


Figure C.11

History

Document history	
July 1994	First Edition
June 1995	Corrigendum to First Edition
January 1996	Corrigendum to First Edition (including prior Corrigenda)