
Space systems — Space debris mitigation requirements

Systèmes spatiaux — Exigences de mitigation des débris spatiaux

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24113:2010

<https://standards.iteh.ai/catalog/standards/sist/a5af2f2d-379e-4e10-bc2f-f8dc3bfa7879/iso-24113-2010>



Reference number
ISO 24113:2010(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24113:2010

<https://standards.iteh.ai/catalog/standards/sist/a5af2f2d-379e-4e10-bc2f-f8dc3bfa7879/iso-24113-2010>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviated terms	3
4.1 Symbols.....	3
4.2 Abbreviated terms	3
5 Protected regions	4
5.1 General	4
5.2 LEO protected region	4
5.3 GEO protected region	4
6 Technical requirements	5
6.1 Avoiding the intentional release of space debris into Earth orbit during normal operations.....	5
6.1.1 General	5
6.1.2 Combustion-related products	5
6.2 Avoiding break-ups in Earth orbit	5
6.2.1 Intentional break-ups	5
6.2.2 Accidental break-ups	5
6.3 Removing a spacecraft or launch vehicle orbital stage from the protected regions after end of mission	5
6.3.1 Probability of successful disposal	5
6.3.2 GEO disposal manoeuvres	6
6.3.3 LEO disposal manoeuvres	6
6.3.4 Re-entry	6
7 Space debris mitigation plan.....	7
Annex A (informative) Probability of successful disposal	8
Annex B (informative) Post-launch life cycle phases of a launch vehicle or spacecraft	11
Bibliography.....	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 24113 was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24113:2010

<https://standards.iteh.ai/catalog/standards/sist/a5af2f2d-379e-4e10-bc2f-f8dc3bfa7879/iso-24113-2010>

Introduction

Space debris comprises all non-functional, man-made objects, including fragments and elements thereof, in Earth orbit or re-entering the Earth's atmosphere. The growing population of these objects poses an increasing hazard to missions. In response to this problem, there is international consensus that space activities be managed to minimize debris generation and risk. This consensus is embodied in space debris mitigation guidelines published by organizations such as the International Telecommunication Union (ITU)^[1], the Inter-Agency Space Debris Coordination Committee (IADC)^{[2][3]} and the United Nations (UN)^[4]. The transformation of debris mitigation guidelines into engineering practice is a key purpose of this International Standard.

The importance of this International Standard can be seen within the context of four UN treaties^[5] that were established under the United Nations Committee on the Peaceful Uses of Outer Space (UNCOPUOS) to govern the involvement of nations in space activities. These are the *Outer Space Treaty*, the *Liability Convention*, the *Registration Convention* and the *Rescue Agreement*. Through some of these treaties, a Launching State has total liability for damage caused by its spacecraft or launch vehicle orbital stages (or any parts thereof) on the surface of the Earth or to aircraft in flight, as well as in outer space where fault can be proven.

All countries are encouraged to abide by these international agreements in order not to endanger or constrain existing and future space missions. A Launching State can choose to appoint licensing or regulatory authorities to administer its approach for complying with the above-mentioned UN treaties. In several Launching States, these authorities have implemented national legislation to enforce the UN treaties. Such legislation can include the mitigation of space debris. Some Launching States meet their obligations by appointing non-regulatory government bodies, such as national space agencies, to provide the necessary guidelines or requirements, including those for space debris mitigation.

The general aim of space debris mitigation is to reduce the growth of space debris by ensuring that spacecraft and launch vehicle orbital stages are designed, operated and disposed of in a manner that prevents them from generating debris throughout their orbital lifetime. This is achieved by:

- a) avoiding the intentional release of space debris into Earth orbit during normal operations;
- b) avoiding break-ups in Earth orbit;
- c) removing spacecraft and launch vehicle orbital stages from protected orbital regions after end of mission;
- d) performing the necessary actions to minimize the risk of collision with other space objects.

Such actions are especially important for a spacecraft or launch vehicle orbital stage that has one or more of the following characteristics:

- a large collision cross-section;
- remains in orbit for many years;
- operates near manned mission orbital regions;
- operates in highly utilized regions, such as protected regions;
- operates in regions of high debris population.

This International Standard transforms these objectives into a set of high-level debris mitigation requirements. Methods and processes to enable compliance with these requirements are provided in a series of lower level implementation standards.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 24113:2010

<https://standards.iteh.ai/catalog/standards/sist/a5af2f2d-379e-4e10-bc2f-f8dc3bfa7879/iso-24113-2010>

Space systems — Space debris mitigation requirements

1 Scope

This International Standard defines the primary space debris mitigation requirements applicable to all elements of unmanned systems launched into, or passing through, near-Earth space, including launch vehicle orbital stages, operating spacecraft and any objects released as part of normal operations or disposal actions.

The requirements contained in this International Standard aim to reduce the growth of space debris by ensuring that spacecraft and launch vehicle orbital stages are designed, operated and disposed of in a manner that prevents them from generating debris throughout their orbital lifetime.

This International Standard is the top-level standard in a series of standards addressing debris mitigation. It will be the main interface for the user, bridging between the primary debris mitigation requirements and the lower level implementation standards that will ensure compliance.

This International Standard does not cover launch phase safety for which specific rules are defined elsewhere.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9000:2005, *Quality management systems — Fundamentals and vocabulary*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9000:2005 and the following apply.

3.1

approving agent

entity from whom approval is sought for the implementation of space debris mitigation requirements with respect to the procurement of a spacecraft, or its launch, or its operations in space, or a combination of those activities

EXAMPLE Regulatory or licensing authorities; national or international space agencies.

3.2

break-up

event that destroys an object and generates fragments that are released into space

3.3

casualty risk

probability that a person is killed or seriously injured

3.4

disposal

actions performed by a spacecraft or launch vehicle orbital stage to permanently reduce its chance of accidental break-up and to achieve its required long-term clearance of the protected regions

3.5

disposal phase

interval during which a spacecraft or launch vehicle orbital stage completes its disposal actions

3.6

end of life

instant when a spacecraft or launch vehicle orbital stage is permanently turned off, nominally as it completes its disposal phase, or when it re-enters, or when the operator can no longer control it

3.7

end of mission

instant when a spacecraft or launch vehicle orbital stage completes the tasks or functions for which it has been designed, or when it becomes non-functional or permanently halted because of a failure or because of a voluntary decision

3.8

geostationary Earth orbit

GEO

Earth orbit having zero inclination and zero eccentricity, whose orbital period is equal to the Earth's sidereal rotation period

3.9

launch vehicle orbital stage

stage of a launch vehicle that is designed to achieve orbit

3.10

Launching State

State that launches or procures the launching of a spacecraft, or a State from whose territory or facility a spacecraft is launched

NOTE This definition is consistent with the definition in the UN Liability Convention and the Resolution 59/115 of 10 December 2004 on the notion of the Launching State.

3.11

normal operations

planned tasks or functions performed by a spacecraft or launch vehicle orbital stage prior to its disposal

3.12

orbital lifetime

period of time from when a spacecraft or launch vehicle orbital stage achieves Earth orbit to when it commences re-entry

3.13

probability of successful disposal

probability of successfully disposing of a spacecraft or launch vehicle orbital stage, evaluated as a conditional probability weighted on the mission success at the time disposal is executed

NOTE See Annex A.

3.14

protected region

region in space that is protected with regard to the generation of space debris to ensure its safe and sustainable use in the future

3.15**re-entry**

process in which atmospheric drag cascades deceleration of a spacecraft or launch vehicle orbital stage (or any part thereof), leading to its destruction or return to Earth

NOTE For operational purposes, this is when the period of the mean orbit is 89 min or less.

3.16**regulatory authority**

governmental entity, national or international, that bears responsibility for implementing space debris mitigation policy or law with respect to the procurement of a spacecraft, or its launch, or its operations in space, or a combination of those activities

3.17**space debris**

orbital debris

man-made objects, including fragments and elements thereof, in Earth orbit or re-entering the atmosphere, that are non-functional

3.18**spacecraft**

system designed to perform specific tasks or functions in space

NOTE A spacecraft that can no longer fulfil its intended mission is considered non-functional. Spacecraft in reserve or standby modes awaiting possible reactivation are considered functional.

iTeh STANDARD PREVIEW

4 Symbols and abbreviated terms (standards.iteh.ai)

4.1 Symbols

ISO 24113:2010

<https://standards.iteh.ai/catalog/standards/sist/a5af2fd-379e-4e10-bc2f-55121575-24113-2010>

A/m	aspect area to dry mass ratio (m^2kg^{-1})
C_R	solar radiation pressure coefficient ($0 < C_R < 2$)
$P(D M)$	probability that disposal, D , will be successful given that the nominal mission, M , has been completed
Z	altitude measured with respect to a spherical Earth whose radius is 6 378 km
Z_{GEO}	altitude of the geostationary orbit with respect to a spherical Earth whose radius is 6 378 km
ΔH	change in altitude


4.2 Abbreviated terms

GEO	geostationary earth orbit
LEO	low earth orbit
LV	launch vehicle
S/C	spacecraft
SDMP	space debris mitigation plan

5 Protected regions

5.1 General

Due to their operational interest and unique nature, the LEO and GEO regions are considered as protected regions with regard to space debris (see Figure 1).

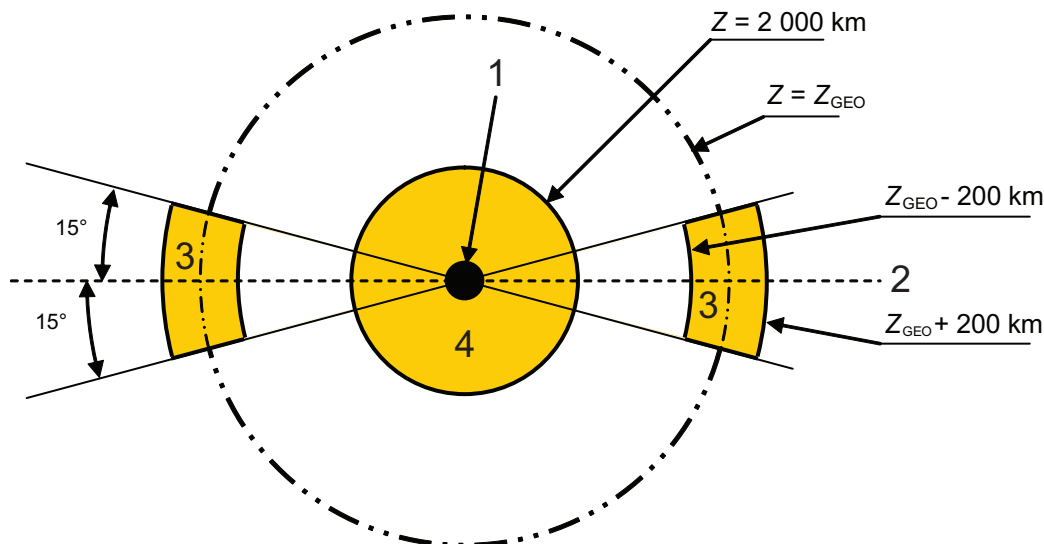

Key

- 1 Earth
- 2 equator
- 3 LEO region
- 4 GEO region
- Z altitude measured with respect to a spherical Earth whose radius is 6 378 km
- Z_{GEO} altitude of the geostationary orbit with respect to a spherical Earth whose radius is 6 378 km

NOTE The dimensions in the figure are not to scale.

Figure 1 — View in the equatorial plane of Earth and the protected regions

5.2 LEO protected region

The LEO protected region, as defined by the IADC^[2] and illustrated in Figure 1, is a shell that extends from the surface of a spherical Earth with an equatorial radius of 6 378 km up to an altitude, Z , of 2 000 km.

5.3 GEO protected region

The GEO protected region, as defined by the IADC^[2] and illustrated in Figure 1, is a segment of a spherical shell with the following characteristics:

- a) lower altitude: geostationary altitude minus 200 km;
- b) upper altitude: geostationary altitude plus 200 km;
- c) latitude sector: $15^\circ \text{ South} \leq \text{latitude} \leq 15^\circ \text{ North}$,

where geostationary altitude (Z_{GEO}) is approximately 35 786 km, i.e. the altitude of the geostationary Earth orbit above a spherical Earth with an equatorial radius of 6 378 km.

6 Technical requirements

6.1 Avoiding the intentional release of space debris into Earth orbit during normal operations

6.1.1 General

6.1.1.1 Spacecraft and launch vehicle orbital stages shall be designed so as not to release space debris into Earth orbit during normal operations.

6.1.1.2 Space debris released into Earth orbit as part of normal operations, other than those covered by 6.1.2, shall remain outside the GEO protected region and limit their presence in the LEO protected region to a maximum of 25 years after their release.

6.1.2 Combustion-related products

6.1.2.1 Pyrotechnic devices shall be designed so as to avoid the release into Earth orbit of products larger than 1 mm in their largest dimension.

6.1.2.2 Solid rocket motors shall be designed and operated so as to avoid releasing solid combustion products into the GEO protected region.

6.1.2.3 In the design and operation of solid rocket motors, methods to avoid the release of solid combustion products that might contaminate the LEO protected region shall be considered.

6.2 Avoiding break-ups in Earth orbit

6.2.1 Intentional break-ups

In Earth orbit, intentional break-up of a spacecraft or launch vehicle orbital stage shall be avoided.

6.2.2 Accidental break-ups

6.2.2.1 The probability of accidental break-up of a spacecraft or launch vehicle orbital stage shall be no greater than 10^{-3} until its end of life.

6.2.2.2 The determination of accidental break-up probability shall quantitatively consider all known failure modes for the release of stored energy, excluding those from external sources such as impacts with space debris and meteoroids.

6.2.2.3 During the disposal phase, a spacecraft or launch vehicle orbital stage shall permanently deplete or make safe all remaining on-board sources of stored energy in a controlled sequence.

6.3 Removing a spacecraft or launch vehicle orbital stage from the protected regions after end of mission

6.3.1 Probability of successful disposal

6.3.1.1 The probability of successful disposal of a spacecraft or launch vehicle orbital stage shall be at least 0,9 at the time disposal is executed.

6.3.1.2 The probability of successful disposal, as discussed in Annex A, shall be evaluated as conditional probability weighted on the mission success, i.e. $P(D|M)$.

6.3.1.3 The start and end of the disposal phase, as illustrated in Annex B, shall be chosen so that all disposal actions are completed within a period of time that ensures compliance with 6.3.1.1.