
**Test conditions for machining centres —
Part 10:
Evaluation of thermal distortions**

Conditions d'essai des centres d'usinage —

Partie 10: Évaluation des déformations thermiques

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 10791-10:2007

<https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 10791-10:2007](https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007)

<https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007>

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10791-10 was prepared by Technical Committee ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

ISO 10791 consists of the following parts, under the general title *Test conditions for machining centres*:

- *Part 1: Geometric tests for machines with horizontal spindle and with accessory heads (horizontal Z-axis)*
- *Part 2: Geometric tests for machines with vertical spindle or universal heads with vertical primary rotary axis (vertical Z-axis)*
- *Part 3: Geometric tests for machines with integral indexable or continuous universal heads (vertical Z-axis)*
- *Part 4: Accuracy and repeatability of positioning of linear and rotary axes*
- *Part 5: Accuracy and repeatability of positioning of work-holding pallets*
- *Part 6: Accuracy of feeds, speeds and interpolations*
- *Part 7: Accuracy of a finished test piece*
- *Part 8: Evaluation of contouring performance in the three coordinate planes*
- *Part 9: Evaluation of the operating times of tool change and pallet change*
- *Part 10: Evaluation of thermal distortions*

Introduction

A machining centre is a numerically controlled machine tool capable of performing multiple machining operations, including milling, boring, drilling and tapping, as well as automatic tool changing from a magazine or similar storage unit in accordance with a machining programme. Most machining centres have facilities for automatically changing the direction in which the workpieces are presented to the tool.

The purpose of ISO 10791 is to supply information as wide and comprehensive as possible on tests and checks which can be carried out for comparison, acceptance, maintenance or any other purpose.

ISO 10791 specifies, by reference to the relevant parts of ISO 230, *Test code for machine tools*, several families of tests for machining centres with horizontal or vertical spindle or with universal heads of different types, standing alone or integrated in flexible manufacturing systems. ISO 10791 also establishes the tolerances or maximum acceptable values for the test results corresponding to general purpose and normal accuracy machining centres.

ISO 10791 is also applicable, totally or partially, to numerically controlled milling and boring machines, when their configuration, components and movements are compatible with the tests described herein.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 10791-10:2007](https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007)

<https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007>

Test conditions for machining centres —

Part 10:

Evaluation of thermal distortions

1 Scope

This part of ISO 10791 specifies, with reference to ISO 230-3, tests for the evaluation of thermal distortions of the machine structure and positioning system, up to 2 000 mm in length, of machining centres. It gives three test methods:

- environmental temperature variation error;
- thermal distortion caused by a rotating spindle;
- thermal distortion caused by moving linear axes.

There is no intention of assigning any numerical tolerances associated with the tests specified.

2 Normative references

[ISO 10791-10:2007](https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-60a2878/iso-10791-10-2007)

[https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-](https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-60a2878/iso-10791-10-2007)

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 230-3:2007, *Test code for machine tools — Part 3: Determination of thermal effects*

3 Preliminary remarks

3.1 Measuring units

In this part of ISO 10791, all linear dimensions and deviations are expressed in millimetres. All angular dimensions are expressed in degrees. Angular deviations are, in principle, expressed in ratios; however, in some cases, microradians or arcseconds may be used for classification purposes. The equivalent of the following expressions should always be kept in mind:

$$0,010/1\,000 = 10\ \mu\text{rad} \approx 2''$$

The temperatures are expressed in degrees Celsius (°C).

3.2 Reference to ISO 230

For the application of this part of ISO 10791, reference shall be made to ISO 230-3, especially for the installation of the machine before testing, description of measuring methods and presentation of the results.

3.3 Measuring instruments

The measuring instruments recommended in this document are given only by way of examples. Other measuring instruments capable of measuring the same quantities and having the same or a smaller measurement uncertainty may be used.

3.4 Testing sequence

The tests given in this part of ISO 10791 may be used either singularly or in any combination. Before each test, the machine tool should be in equilibrium with the environment. Therefore, a sufficient cooling down period between tests, generally at least as long as the thermal test, where parts of the machine have been heated, shall be planned and respected.

3.5 Tests to be performed

When testing a machine, it is not always necessary or even possible to carry out all the tests given in this part of ISO 10791. When the tests are required for acceptance purposes, it is at the option of the user to choose, in agreement with the supplier/manufacturer, those tests relating to the components and/or the properties of the machine that are of interest. These tests are to be clearly stated when ordering a machine. Mere reference to this part of ISO 10791 for the acceptance tests, without specification of the tests to be carried out, and without agreement on the relevant expenses, cannot be considered as binding for any contracting party.

4 Environmental temperature variation error (ETVE) test

STANDARD PREVIEW
(standards.iteh.ai)

4.1 General

ISO 10791-10:2007

ETVE tests are designed to reveal the effects of environmental temperature changes on the machine with respect to deflection or deformation of the machine or its parts. They shall not be used for machine comparison.

It is recommended that the supplier/manufacturer offer guidelines regarding the kind of thermal environment that should be acceptable for the machine to perform with the specified accuracy. It shall be the responsibility of the user to provide an acceptable thermal environment for the operation. However, if the user follows the guidelines provided by the machine supplier/manufacturer, the responsibility for machine performance according to the specification reverts to the machine supplier/manufacturer.

4.2 Test method


The test method shall be in accordance with ISO 230-3:2007, 5.2. Figure 1 shows a typical test set-up.

Axes might warm up when under NC "HOLD" mode, especially if they are in vertical direction. In such cases, it is recommended that the ETVE test be carried out with all controls on "OFF". This shall be stated in the test report.

4.3 Measuring instruments

For this test, the required measuring instruments are the following:

- linear displacement sensors;
- temperature sensors;
- test mandrel;
- data acquisition equipment.

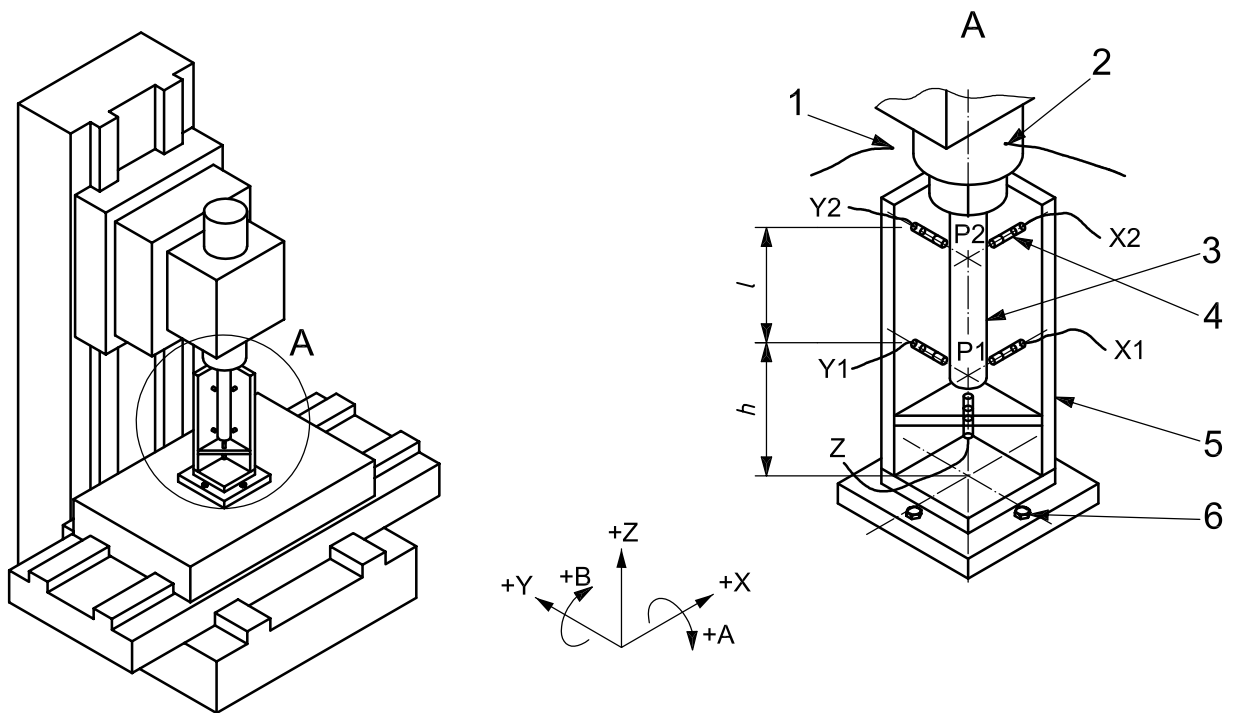

Key

X1, X2, Y1, Y2, Z linear displacement sensors

1 ambient air temperature sensor

2 spindle bearing temperature sensor

3 test mandrel

4 linear displacement sensors

5 fixture

6 fixture bolted to table

iTeh STANDARD PREVIEW

(standards.iteh.ai)

ISO 10791-10:2007

<https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007>

Figure 1 — Typical set-up for ETVE and thermal distortion caused by rotating spindle tests

4.4 Presentation of results

Table 1 provides an example format for the presentation of the results; in addition, a graphical presentation of results should be provided in accordance with ISO 230-3:2007, 5.4.

Table 1 — Format for presentation of ETVE results

Parameter		Results
Time	min	
ETVE _X	mm	
ETVE _Y	mm	
ETVE _Z	mm	
ETVE _A	arcsec	
ETVE _B	arcsec	

4.5 Information to be recorded

The following information shall be recorded:

- a) machine brand and model name;
- b) year of construction of machine, if available;
- c) machine serial number;
- d) time and date of test;
- e) location of the measurement set-up;
- f) location of temperature sensors;
- g) type of sensors;
- h) design and material of the test mandrel and fixture;
- i) thermal compensation procedure;
- j) any special test procedures;
- k) machine preparation procedure prior to testing;
- l) control ON or OFF;
- m) positive direction of drift (if different from coordinate system).

ITeH STANDARD PREVIEW

5 Thermal distortion caused by rotating spindles (standard.iteh.ai)

5.1 Requirement

<https://standards.iteh.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-acaca60a28c8/iso-10791-10-2007>

One test per spindle shall be carried out.

5.2 Test method

The test method shall be in accordance with of ISO 230-3:2007, 6.2. Figure 1 shows a typical test set-up. User and manufacturer/supplier shall agree as to whether a constant spindle speed or a variable speed spectrum is used. For the case of constant spindle speed, they also shall agree on the spindle speed to be used. For the variable speed spectrum, they shall agree on the spindle speeds and time interval durations.

NOTE A possible speed spectrum cycle would be a percentage of the maximum spindle speed for a set time, followed by a spindle stop for another fixed time (e.g. 70 % maximum spindle speed for 3 min, followed by a 1 min stop). This cycle would then be repeated for the complete test duration. The exact details of the speed spectrum would need to be discussed between the user and manufacturer/supplier.

The test shall last for 4 h plus 1 h with the spindle stopped.

5.3 Measuring instruments

For this test, the required measuring instruments are the following:

- linear displacement sensors;
- temperature sensors;
- test mandrel;
- data acquisition equipment.

5.4 Presentation of results

Table 2 provides an example of the format for the presentation of the results; in addition, a graphical presentation of results should be provided, in accordance with ISO 230-3:2007, 6.4.

Table 2 — Format for presentation of results of thermal effects caused by rotating spindle C

	X1 mm	Y1 mm	Z mm	A arcsec	B arcsec
During first 60 mm	$d(\text{EXC})_{P,60} = \dots$	$d(\text{EYC})_{P,60} = \dots$	$d(\text{EZC})_{60} = \dots$	$d(\text{EAC})_{60} = \dots$	$d(\text{EBC})_{60} = \dots$
After end of period $t = \dots$	$d(\text{EXC})_{P1,t} = \dots$	$d(\text{EYC})_{P1,t} = \dots$	$d(\text{EZC})_t = \dots$	$d(\text{EAC})_t = \dots$	$d(\text{EBC})_t = \dots$
Distance, $l = \dots$					

5.5 Information to be recorded

The following information shall be recorded:

- a) machine brand and model name;
- b) year of construction, if available;
- c) machine serial number;
- d) time and date of test;
- e) location of the measurement set-up;
- f) location of temperature sensors;
- g) type of sensors; <https://standards.itech.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-791-10-2007>
- h) design and material of the test mandrel and fixture; <https://standards.itech.ai/catalog/standards/sist/378f9e2e-9488-43ed-93d6-791-10-2007>
- i) thermal compensation procedure;
- j) any special test procedures;
- k) machine preparation procedure prior to testing.
- l) spindle speed regime;
- m) positive direction of drift (if different from coordinate system);
- n) relative position of the spindle during measurement.

6 Thermal distortion caused by linear motion of components

6.1 Test method

The test method shall be in accordance with ISO 230-3:2007, 7.2. Figure 2 shows a typical test set-up.

In practice, there should be different feedrates for principal and for auxiliary axes.

EXAMPLE A feedrate set for principal axes at 50 %, and one for auxiliary axes set at 20 %, of f_{\max} .

The test cycle shall be made up of two time periods: 4 h of warming up the axis and 1 h for cooling it down. The measurements shall be interrupted when the distortion change noted during the final 60 min is less than 15 % of the distortion registered over the initial 60 min of the test.