
**Agricultural and forestry tractors —
Roll-over protective structures on
narrow-track wheeled tractors —**

**Part 2:
Rear-mounted ROPS**

iTeh STANDARD PREVIEW
*Tracteurs agricoles et forestiers — Structures de protection contre le
retournement (ROPS) pour tracteurs à roues à voie étroite —
Partie 2: ROPS montées à l'arrière*
(standards.iteh.ai)

[ISO 12003-2:2008](https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008)

<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 12003-2:2008

<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Symbols.....	4
5 Test apparatus and equipment	4
5.1 Apparatus for both dynamic and static testing.....	4
5.2 Apparatus for dynamic testing	5
5.3 Apparatus for static testing.....	11
6 Tractor preparation	12
7 Test procedures.....	13
7.1 General requirements	13
7.2 Test sequence	13
7.3 Dynamic (impact) test procedures for rear-mounted ROPS	14
7.4 Static test procedures for rear-mounted ROPS	17
7.5 Vertical crushing test procedure	19
7.6 Observations during testing	19
8 Seat index point.....	19
9 Clearance zone	20
10 Tolerances.....	22
11 Acceptance conditions	23
11.1 General requirements	23
11.2 After impact loads	23
11.3 After static horizontal loads	23
11.4 Additional crushing tests	26
12 Extension to other tractor models.....	26
13 Labelling.....	27
14 Test report.....	27
Annex A (normative) Requirements for providing resistance to brittle fracture of rear-mounted ROPS at a reduced operation temperature.....	28
Annex B (normative) Test report for rear-mounted ROPS	30
Bibliography.....	38

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 12003-2 was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 2, *Common tests*.

This second edition cancels and replaces the first edition (ISO 12003-2:2002), which has been technically revised.

ISO 12003 consists of the following parts, under the general title *Agricultural and forestry tractors — Roll-over protective structures on narrow-track wheeled tractors*:

— Part 1: *Front-mounted ROPS*

— Part 2: *Rear-mounted ROPS*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 12003-2:2008
<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008>

Introduction

Testing of roll-over protective structures (ROPS) for tractors for agriculture and forestry aims at minimizing the likelihood of driver injury resulting from accidental overturning during normal operation (e.g. field work) of the tractor. The strength of the roll-over protective structure is tested by applying loads to simulate actual loads which may be imposed on the cab or frame when the tractor overturns either to the rear or to the side without free fall. The tests allow observations to be made on the strength of the structure and the attachment brackets to the tractor and also of the tractor parts that may be affected by the load imposed on the structure.

This part of ISO 12003 enables the strength of a tractor's rear-mounted roll-over protective structure to be tested by the application of dynamic and static loads that simulate the actual loads which can be imposed on the cab or frame when the tractor overturns either to the rear or to the side without free fall.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 12003-2:2008](https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008)

<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 12003-2:2008

<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008>

Agricultural and forestry tractors — Roll-over protective structures on narrow-track wheeled tractors —

Part 2: Rear-mounted ROPS

1 Scope

This part of ISO 12003 specifies procedures for both the static and dynamic testing of roll-over protective structures (ROPS) rear-mounted on narrow-track wheeled agricultural and forestry tractors. It defines the clearance zone and acceptance conditions for rigid or tiltable, rear, two-post roll bar, frame and cab ROPS, and is applicable to tractors so equipped having the following characteristics.

- A ground clearance of not more than 600 mm beneath the lowest points of the front- and rear-axle housings (not considering lower points on the axle differential).
- A fixed or adjustable minimum track width of one of the two axles of less than 1 150 mm when fitted with the widest specified tyres, and with the overall width of the other axle being less than that of the first axle.
- A mass greater than 600 kg but less than 3 000 kg, unladen, including the ROPS and tyres of the largest size recommended by the manufacturer.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 630, *Structural steels — Plates, wide flats, bars, sections and profiles*

ISO 898-1:1999, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs*

ISO 898-2:1992, *Mechanical properties of fasteners — Part 2: Nuts with specified proof load values — Coarse thread*

ISO 2408, *Steel wire ropes for general purposes — Minimum requirements*

ISO 5353, *Earth-moving machinery, and tractors and machinery for agriculture and forestry — Seat index point*

ASTM A370, *Standard Test Methods and Definitions for Mechanical Testing of Steel Products*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 roll-over protective structure ROPS

framework protecting drivers of wheeled agricultural and forestry tractors, which minimizes the likelihood of driver injury resulting from accidental overturning during normal field work

NOTE The ROPS is characterized by the provision of space for a clearance zone, either inside the envelope of the structure or within a space bounded by a series of straight lines from the outer edges of the structure to any part of the tractor that might come into contact with the ground; it is capable of supporting the tractor in an overturned position.

3.2 rear-mounted ROPS

two-post, roll-bar-type, roll-over protective structure mounted on the tractor rearwards of the driving seat, or a frame or cab

NOTE Compare with front-mounted ROPS described in ISO 12003-1.

3.3 tractor mass

mass of the unladen tractor in working order with tanks and radiator full, rear-mounted ROPS with cladding, and any track equipment or additional front-wheel drive components required for normal use

NOTE The operator, optional ballast weights, additional wheel equipment, and special equipment and tools are not included.

3.4 reference mass

mass, not less than the tractor mass, selected by the manufacturer for calculation of the energy inputs to be used in the tests

3.5 horizontal loading test

application of a horizontal load to the rear, front and side of the roll-over protective structure

3.6 crushing test

application of a vertical static load through a beam placed laterally across the uppermost members of the rear-mounted ROPS

3.7 reference plane

vertical plane, generally longitudinal to the tractor and passing through the seat index point and the steering-wheel centre

NOTE Normally this reference plane coincides with the longitudinal median plane of the tractor.

3.8**longitudinal median plane****longitudinal plane of symmetry****zero Y plane**

vertical plane Y passing through the mid-points of AB, perpendicular to AB, where, for each wheel, the vertical plane passing through its axis cuts the mid-plane of the wheel following a straight line Δ which meets the supporting surface of the vehicle at one point, and where A and B are two points thus defined which correspond to two wheels, both of which are either steering or powered wheels, situated respectively at the two ends of the same real or imaginary axle

See Figure 1.

NOTE 1 “Mid-plane of the wheel” designates the plane equidistant from the inner edges of the rim. In the case of dual wheels, the straight line Δ is, in this particular case, the intersection of the mid-plane of the dual wheels and the vertical plane passing through the axis of the axle pin.

NOTE 2 Adapted from ISO 612:1978^[1], Clause 5.

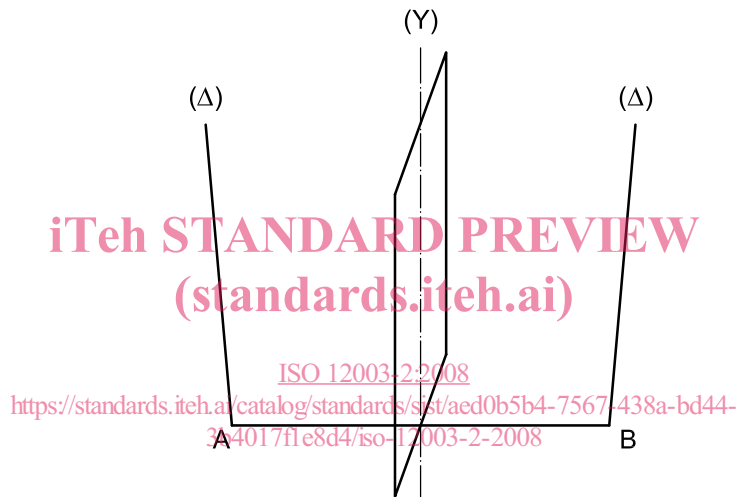


Figure 1 — Longitudinal median plane

3.9**impact test**

application of a dynamic load produced by a block acting as a pendulum

3.10**wheelbase**

horizontal distance between the two vertical planes passing through the rotational centre-lines of the wheels, where one plane is for the front wheels and the other for the rear wheels

4 Symbols

See Table 1.

Table 1 — Symbols

Symbol	Description	Unit
a_h	Half of the horizontal seat adjustment	mm
a_v	Half of the vertical seat adjustment	mm
B	Minimum overall width of the tractor	mm
B_b	Maximum outer width of the rear-mounted ROPS	mm
D	Deflection of the ROPS for the calculated basic energy at the point of, and in line with, the load application	mm
E_{il}	Energy to be absorbed during longitudinal loading	J
E_{is}	Energy to be absorbed during side loading	J
F	Static load force	N
F_{max}	Maximum static load force occurring during loading, with the exception of overload	N
F_v	Vertical crushing force	N
H	Falling height of the pendulum block	mm
I	Moment of inertia about rear axle, whatever the mass of the rear wheels may be	kg·m ²
L	Tractor reference wheelbase	mm
m	Tractor mass (see 3.5)	kg
m_t	Reference mass (see 3.4)	kg
W	Overall width of the upper part of the protective structure	mm

5 Test apparatus and equipment

5.1 Apparatus for both dynamic and static testing

5.1.1 Clearance zone framework


Means to prove that the clearance zone has not been entered during the test: a measuring rig complying with Figures 10 and 11 can be used.

5.1.2 Apparatus for crushing tests

The crushing tests shall be carried out by means of the elements described in 5.1.2.1 and 5.1.2.2.

5.1.2.1 Means to apply downward force on the protective structure, such as that shown in Figure 2, including a stiff beam with a width of 250 mm.

5.1.2.2 Equipment to measure total vertical force applied.

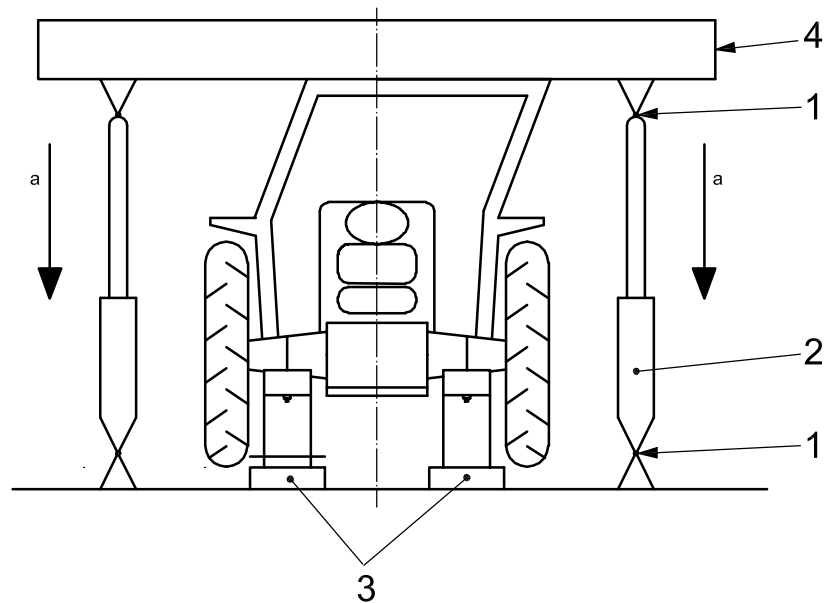**Key**

- 1 universal pin joints
- 2 hydraulic cylinder
- 3 supports
- 4 crushing beam

^a Direction of force.

iTeh STANDARD PREVIEW
(standards.iteh.ai)


Figure 2 — Crushing test — Example

<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-314017f1e8d4/iso-12003-2-2008>

5.2 Apparatus for dynamic testing

5.2.1 Device to strike a blow against the protective structure

A pendulum block with mass of 2 000 kg. The pendulum block mass does not include the mass of the chains. The maximum chain mass shall be 100 kg. The dimensions of the block, which shall be suspended from two chains from pivot points 6 m or more above ground level, shall be as shown in Figure 3. The pendulum block centre of gravity shall coincide with its geometric centre.

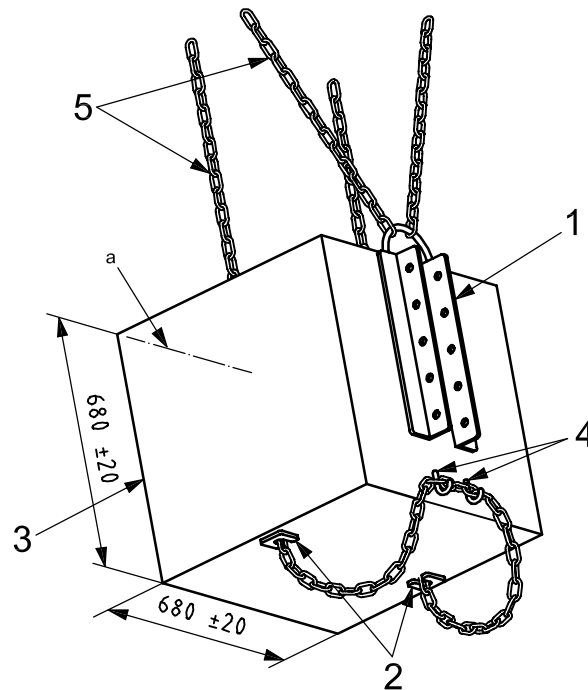

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Key

- 1 attachment for release mechanism
- 2 height adjustment
- 3 impact face
- 4 hooks to hold spare chain
- 5 pendulum chains

a Axis of centre of gravity.

ISO 12003-2:2008
<https://standards.iteh.ai/catalog/standards/sist/aed0b5b4-7567-438a-bd44-3b4017f1e8d4/iso-12003-2-2008>

Figure 3 — Illustration of pendulum block

5.2.2 Pendulum supports

The pendulum pivot points shall be rigidly fixed such that their displacement in any direction does not exceed 1 % of the height of fall.

5.2.3 Means to lash the tractor to the ground


The tractor shall be lashed, by means of steel wire ropes incorporating tensioning devices, to ground rails preferably spaced approximately 600 mm apart throughout the area immediately below the pivot points and extending for approximately 9 m along the pendulum block axis and approximately 1 800 mm to either side. The points of attachment of the lashings shall be approximately 2 000 mm behind the rear axle and 1 500 mm in front of the front axle. There shall be two lashings on each axle, one on each side of the median plane of the tractor. The lashings shall be steel cable of 12,5 mm to 15 mm diameter, tensile strength 1 100 MPa to 1 260 MPa, meeting the requirements of ISO 2408. Details of the lashing means are given in Figures 4, 5 and 6.

The front and rear wheels are not required to be in line if this is more convenient for attaching appropriate ropes.

5.2.4 Softwood beam

A softwood beam, of cross-section 150 mm × 150 mm, to restrain the rear wheels when striking from the front or rear, and to clamp against the side of the front and rear wheels when striking from the side, as shown in Figures 4, 5 and 6.

Dimensions in millimetres

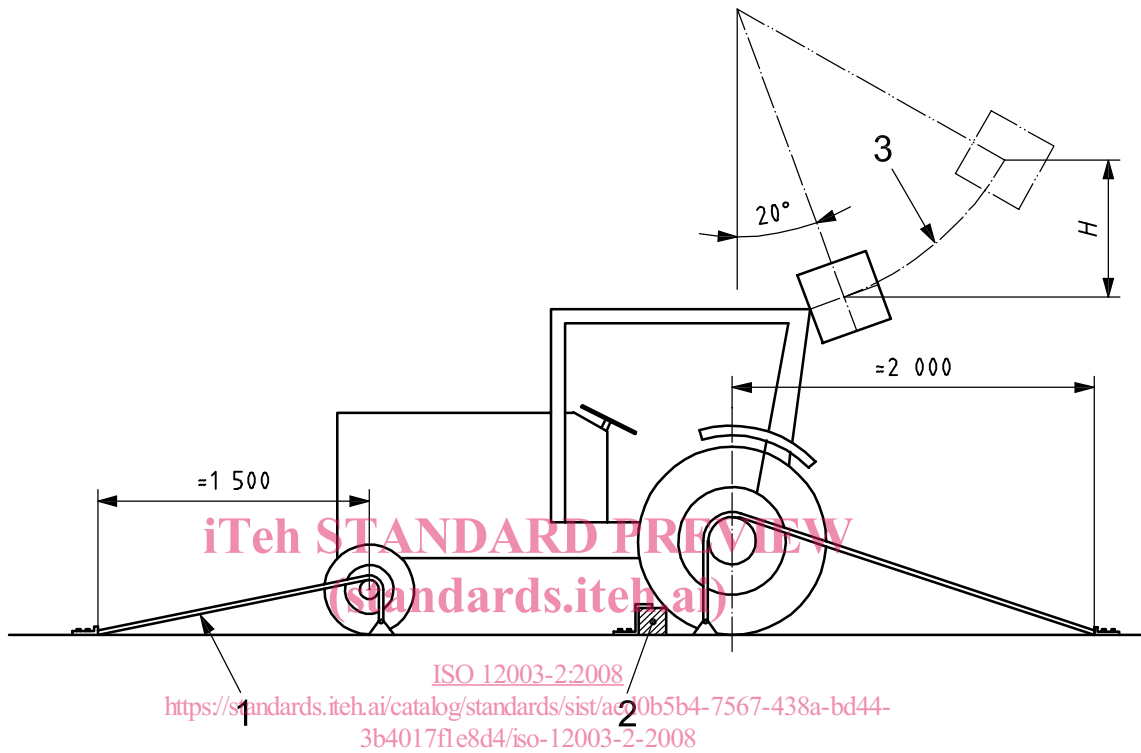

Key

- 1 positioning tie
- 2 150 mm square softwood beam clamped behind both rear wheels after anchoring
- 3 travel arc of pendulum block centre of gravity passing through contact point

Figure 4 — Example of lashing method — Impact from rear