



SLOVENSKI STANDARD

SIST ETS 300 559 E4:2003

01-december-2003

8][JhUb]WY] b]hYY_ca i b]_UWg] g]ghYa 'fUhU&LÉGhcf]hYj '_fUh_]\ gdcfc]'fGA GŁ
h _Ulh _UfDDŁ_chdcXdcfUja Ygb]_i 'a cV]bY[UfUX]Uf] GA '\$(")%Ł

Digital cellular telecommunications system (Phase 2) (GSM); Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface (GSM 04.11)

iTeh STANDARD PREVIEW

(standards.iteh.ai)

Ta slovenski standard je istoveten z: SIST ETS 300 559 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/95c16d19-a1c0-489f-9918-363f861349a6/sist-ets-300-559-e4-2003>

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST ETS 300 559 E4:2003

en

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST ETS 300 559 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918-363f861349a6/sist-ets-300-559-e4-2003>



EUROPEAN TELECOMMUNICATION STANDARD

ETS 300 559

September 1996

Fourth Edition

Source: ETSI TC-SMG

Reference: RE/SMG-030411PR3

ICS: 33.060.50

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



Digital cellular telecommunications system (Phase 2); Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface (GSM 04.11)

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

Page 2

ETS 300 559 (GSM 04.11 version 4.10.0): September 1996

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 559 E4:2003](#)

<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918-363f861349a6/sist-ets-300-559-e4-2003>

Contents

Foreword	7
1 Scope	9
1.1 Normative references	9
1.2 Abbreviations	9
2 Overview of Short Message Service (SMS) support	10
2.1 Protocols and protocol architecture	10
2.2 Use of channels	11
2.3 Layer 2 SAPI 3 handling	11
3 Service definition	12
3.1 General	12
3.2 Service provided by the CM-sublayer	12
3.2.1 Definition of primitives on the MS side	13
3.2.1.1 MNSMS-ABORT-REQuest	13
3.2.1.2 MNSMS-DATA-REQuest	13
3.2.1.3 MNSMS-DATA-INDication	13
3.2.1.4 MNSMS-ESTablish-REQuest	13
3.2.1.5 MNSMS-ESTablish-INDication	14
3.2.1.6 MNSMS-ERROR-INDication	14
3.2.1.7 MNSMS-RELEASE-REQuest	14
3.2.2 Definition of primitives on the network side	14
3.2.2.1 MNSMS-ABORT-REQuest	14
3.2.2.2 MNSMS-DATA-REQuest	14
3.2.2.3 MNSMS-DATA-INDication	15
3.2.2.4 MNSMS-ESTablish-REQuest	15
3.2.2.5 MNSMS-ESTablish-INDication	15
3.2.2.6 MNSMS-ERROR-INDication	15
3.2.2.7 MNSMS-RELEASE-REQuest	15
3.3.1 Service provided by SM-RL	15
3.3.1.1 Definition of primitives on the MS side	15
3.3.1.2 SM-RL-DATA-REQuest	16
3.3.1.3 SM-RL-MEMORY-AVAILABLE-REQuest	16
3.3.1.4 SM-RL-REPORT-REQuest	16
3.3.1.5 SM-RL-REPORT-INDication	17
3.3.2 Definition of primitives on the network side	17
3.3.2.1 SM-RL-DATA-REQuest	17
3.3.2.2 SM-RL-DATA-INDication	17
3.3.2.3 SM-RL-MEMORY-AVAILABLE-INDication	17
3.3.2.4 SM-RL-REPORT-REQuest	17
3.3.2.5 SM-RL-REPORT-INDication	17
4 [Spare]	17
5 CM-procedures	18
5.1 General	18
5.2 Short Message Control states	18
5.2.1 SMC states at the MS side of the radio interface	18
5.2.1.1 Mobile Originating Case	18
5.2.1.1.1 MO-Idle (State 0)	18
5.2.1.1.2 MO-MM-connection pending (State 1)	18
5.2.1.1.3 MO-Wait for CP-ACK (State 2)	18
5.2.1.1.4 MO-MM-connection established (State 3)	18
5.2.1.2 Mobile Terminating case	18

	5.2.1.2.1	MT-Idle (State 0)	18
	5.2.1.2.2	MT-Wait for CP-ACK (State 2).....	18
	5.2.1.2.3	MT-MM-connection established (State 3).....	19
5.2.2	SMC states at the network side of the radio interface	19	
	5.2.2.1	Mobile Originating Case.....	19
	5.2.2.1.1	MO-Idle (State 0).....	19
	5.2.2.1.2	MO-Wait for CP-ACK (State 2)	19
	5.2.2.1.3	MO-MM-connection established (State 3).....	19
	5.2.2.2	Mobile Terminating Case	19
	5.2.2.2.1	MT-Idle (State 0)	19
	5.2.2.2.2	MT-MM-connection pending (State 1)..	19
	5.2.2.2.3	MT-Wait for CP-ACK (State 2).....	19
	5.2.2.2.4	MT-MM-connection established (State 3).....	19
5.3	Short message control procedures	20	
	5.3.1	MM-connection establishment.....	20
	5.3.2	RPDU transfer	20
	5.3.3	Release of MM and CM connections.....	21
	5.3.4	Abnormal cases	21
5.4	Concatenating short message or notification transfers.....	22	
6	SM-RL-procedures	23	
6.1	General.....	23	
6.2	Transition states of SMR entity	23	
	6.2.1	SMR-states at the MS-side of the radio interface.....	23
	6.2.1.1	Idle (State 0).....	23
	6.2.1.2	Wait for RP-ACK (State 1).....	23
	6.2.1.3	Wait for RETRANS TIMER (State 4)	23
	6.2.2	SMR-states at the network side of the radio interface	23
	6.2.2.1	Idle (State 0).....	23
	6.2.2.2	Wait for RP-ACK (State 1)	23
	6.2.2.3	Wait to send RP-ACK (State 3).....	23
6.3	Short Message Relay procedures.....	24	
	6.3.1	TPDU relaying.....	24
	6.3.2	[spare].....	24
	6.3.3	Notification relaying.....	24
	6.3.3.1	MS side	24
	6.3.3.1.1	Idle state.....	24
	6.3.3.1.2	Wait for RP-ACK state	25
	6.3.3.1.3	Wait for RETRANS Timer state	25
	6.3.3.2	Network side	25
	6.3.3.2.1	Idle state.....	25
	6.3.3.2.2	Wait to Send RP-ACK state	25
	6.3.4	Abnormal cases	26
7	Message functional definitions and content.....	26	
7.1	General.....	26	
7.2	Messages for short message or notification transfer on CM.....	26	
	7.2.1	CP-DATA	26
	7.2.2	CP-ACK	27
	7.2.3	CP-ERROR.....	27
7.3	Messages for short message and notification transfer on SM-RL	27	
	7.3.1	RP-DATA	27
	7.3.1.1	RP-DATA (Network to Mobile Station).....	27
	7.3.1.2	RP-DATA (Mobile Station to Network).....	28
	7.3.2	RP-SMMA	28
	7.3.3	RP-ACK	28
	7.3.4	RP-ERROR.....	28
8	Message format and information elements coding.....	29	
8.1	CP-messages.....	29	

8.1.1	General.....	29
8.1.2	Protocol Discriminator and Transaction Identifier	29
8.1.3	Message type	29
8.1.4	Other required information elements.....	30
	8.1.4.1 CP-User data element.....	30
	8.1.4.2 CP-Cause element	30
8.2	RP-messages	31
8.2.1	General.....	31
8.2.2	Message type indicator (MTI).....	31
8.2.3	Message reference.....	31
8.2.4	[Spare].....	32
8.2.5	Other required information elements.....	32
	8.2.5.1 Originator address element	32
	8.2.5.2 Destination address element	32
	8.2.5.3 RP-User data element	33
	8.2.5.4 RP-Cause element	33
9	Handling of unknown, unforeseen, and erroneous protocol data.....	36
9.1	General	36
9.2	CP Error Handling.....	36
9.2.1	Message too short.....	36
9.2.2	Unknown or unforeseen transaction identifier.....	36
9.2.3	Unknown or unforeseen message type.....	36
9.2.4	Non-semantical mandatory information element errors	37
9.2.5	Messages with semantically incorrect contents	37
9.3	RP Error Handling.....	37
9.3.1	Message too short.....	37
9.3.2	Unknown or unforeseen Message Reference.....	38
9.3.3	Unknown or unforeseen message type.....	38
9.3.4	Non-semantical mandatory information element errors	38
9.3.5	Messages with semantically incorrect contents	39
10	Timers	39
Annex A (informative):	Arrow diagrams	40
Annex B (normative):	SDL-description of the CM-layer	45
Annex C (informative):	Arrow diagrams	62
Annex D (normative):	SDL-description of the short message relay layer.....	68
Annex E (informative):	Cause definition.....	76
Annex F (informative):	LAPDm SAPI 3 handling for short message service.....	82
History.....		89

Blank page

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST ETS 300 559 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918-363f861349a6/sist-ets-300-559-e4-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the Short Message Service (SMS) support on mobile radio interface within the digital cellular telecommunications system (Phase 2).

This ETS has been produced as a result of further work carried out by TC-SMG and correspond to GSM technical specification, GSM 04.11 version 4.10.0.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS is not in accordance with the ETSI/PNE rules.

Reference is made within this ETS to GSM Technical Specifications (GSM-TS) (note).

NOTE: TC-SMG has produced documents which give the technical specifications for the implementation of the digital cellular telecommunications system. Historically, these documents have been identified as GSM Technical Specifications (GSM-TS). These TSs may have subsequently become I-ETSS (Phase 1), or ETSSs (Phase 2), whilst others may become ETSI Technical Reports (ETRs). GSM-TSs are, for editorial reasons, still referred to in current GSM ETSSs.

Transposition dates	
Date of adoption of this ETS:	30 September 1996
Date of latest announcement of this ETS (doa):	31 December 1996
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 June 1997
Date of withdrawal of any conflicting National Standard (dow):	30 June 1997

Blank page

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST ETS 300 559 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918-363f861349a6/sist-ets-300-559-e4-2003>

1 Scope

This European Telecommunications Standard (ETS) specifies the procedures used across the mobile radio interface by the signalling layer 3 function Short Message Control (SMC) and Short Message Relay function (SM-RL).

1.1 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 100): "Digital cellular telecommunication system (Phase 2); Abbreviations and acronyms".
- [2] GSM 03.40 (ETS 300 536): "Digital cellular telecommunication system (Phase 2); Technical realization of the Short Message Service (SMS) Point to Point (PP)".
- [3] GSM 04.06 (ETS 300 555): "Digital cellular telecommunication system (Phase 2); Mobile Station - Base Station System (MS - BSS) interface Data Link (DL) layer specification".
- [4] GSM 04.07 (ETS 300 556): "Digital cellular telecommunication system (Phase 2); Mobile radio interface signalling layer 3 General aspects".
- [5] GSM 04.08 (ETS 300 557): "Digital cellular telecommunication system (Phase 2); Mobile radio interface layer 3 specification".
- [6] ISO 7498: "Information processing systems - Open Systems Interconnection - Basic Reference Model".
SIST ETS 300 559 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918-363f861349a6/sist-ets-300-559-e4-2003>

1.2 Abbreviations

Abbreviations used in this specification are listed in GSM 01.04 [1].

2 Overview of Short Message Service (SMS) support


The purpose of the Short Message Service is to provide the means to transfer messages between a GSM PLMN Mobile Station and a Short Message Entity via a Service Centre, as described in TS GSM 03.40. The terms "MO" - Mobile Originating - and "MT" - Mobile Terminating - are used to indicate the direction in which the short message is sent.

This Technical Specification describes the procedures necessary to support the Short Message Service between the MS and the MSC and vice versa, as described in TS GSM 03.40.

The procedures are based on services provided by the Mobility Management sublayer as described in TS GSM 04.07/04.08.

2.1 Protocols and protocol architecture

The hierarchical model shows the layer structure of the MSC and the MS.

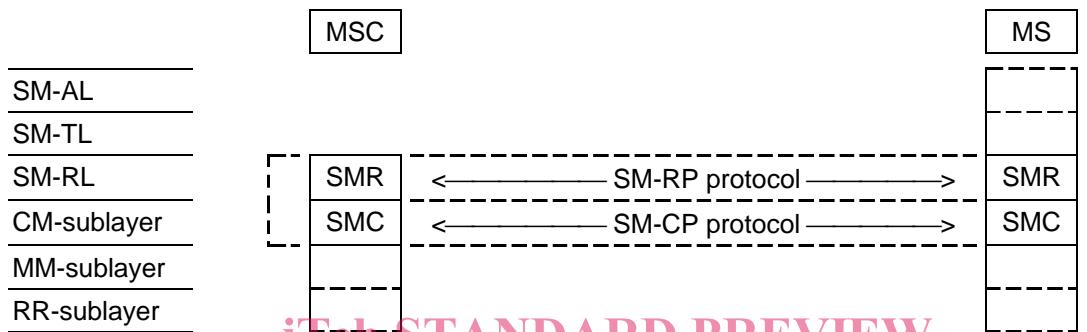

**iTein STANDARD PREVIEW
(standards.iteh.ai)**

The CM-sublayer, in terms of the Short Message Service Support, provides services to the Short Message Relay Layer.

SIST ETS 300 559 E4:2003

<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918->

On the MS-side the Short Message Relay Layer provides services to the Short Message Transfer Layer. The Short Message Relay Layer is the upper layer on the network side (MSC), and the SM-user information elements are mapped to TCAP/MAP.

The peer protocol between two SMC entities is denoted SM-CP, and between two SMR entities, SM-RP.

Abbreviations:

SM-AL	Short Message Application Layer
SM-TL	Short Message Transfer Layer
SM-RL	Short Message Relay Layer
SM-RP	Short Message Relay Protocol
SMR	Short Message Relay (entity)
CM-sub	Connection Management sublayer
SM-CP	Short Message Control Protocol
SMC	Short Message Control (entity)
MM-sub	Mobility Management sublayer
RR-sub	Radio Resource Management sublayer

2.2 Use of channels

The short message service will be supported by an SDCCH or SACCH, depending on the use of a TCH;

- When a TCH is not allocated, the short message service will use an SDCCH;
- If a TCH is allocated during a short message transaction on an SDCCH, the short message transaction will stop and continue on the SACCH associated with the TCH;
- If a TCH is allocated for the short message service, the short message service will use the associated SACCH;
- When an entity using a TCH finishes its transaction, the RR-sublayer may choose to continue an ongoing short message transfer on the SACCH, or optionally transfer it to an SDCCH.

Table 2.1/GSM 04.11 summarizes the use of channels for the short message service. Arrows indicate changes of channel.

Table 2.1/GSM 04.11: Channels used for short message transfer

Channel dependency	Channel used
TCH not allocated	SDCCH
TCH not allocated -> TCH allocated	SDCCH -> SACCH
TCH allocated	SACCH
TCH allocated -> TCH not allocated	SACCH -> SACCH opt. SDCCH

2.3 Layer 2 SAPI 3 handling

iTeh STANDARD PREVIEW

General rule:

(standards.iteh.ai)

The Radio Resource Management (RR ref. TS. GSM 04.08) in the Mobile Station and on the network side (i.e. in the BSC) shall establish the acknowledged mode of operation on SAPI 3 whenever needed, i.e. when a message requiring SAPI 3 transfer shall be transmitted.

<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918->

RR shall control the layer 2 also for SAPI 3, and keep knowledge of the mode.

The network side may initiate release of the acknowledged mode for SAPI 3 either explicitly (by the use of DISC- and UA-frames, ref., TS GSM 04.06) or indirectly by channel release (ref. TS GSM 04.08).

This means:

- the Mobile Station side will initiate establishment of SAPI 3 acknowledged mode in the case of mobile originating short message transfer;
- the network side will initiate establishment of SAPI 3 acknowledged mode in the case of mobile terminating short message transfer;
- the network side may choose to keep the channel and the acknowledged mode of operation to facilitate transfer of several short messages for or from the same Mobile Station. The queuing and scheduling function for this should reside in the MSC.

3 Service definition

3.1 General

The layer service is described as a set of service primitives. These service primitives are abstractions and attempt to capture only those details of the interaction between the entities that are aspects of the layer service itself. A service primitive neither specifies nor constrains the implementation of entities or the interface between them.

The general syntax of a primitive and the initials of them are in line with the 04-series of GSM Technical Specifications.

NOTE: In order to limit the number of primitives and state definitions to a reasonable amount, a description method has been chosen which does not claim to be totally in line with the formal description method of the layered ISO reference model (ISO 7498) for Open Systems Interconnection.

3.2 Service provided by the CM-sublayer

In order to support the Short Message Service, the CM-sublayer provides services to the Short Message Relay Layer.

The CM-sublayer services are provided using layer specific functions and lower layer services offered to the CM-sublayer, controlled by short message service control entities called SMCs.

An SMC entity in the MS communicates with an SMC entity in the MSC by means of a peer protocol, SM-CP (Short Message Service Control Protocol). The arrow diagrams in annex A give an overview of the messaging on the CM-sublayer during a short message transfer.

A mobile station supporting the short message service shall have a minimum of two SMC entities. This enables the MS to receive MT messages during an MO message transfer.

To ensure that an MS having the minimum of two SMC entities is able to receive MT messages during an MO message transfer, and to send MO messages during MT message transfer, parallel message transfer in the same direction is prohibited. This means that the SMC entities shall not simultaneously perform messaging in the same direction. The rules for concatenation of message transfers are described in section 5.4.

The MSC shall have a minimum of two SMC entities available during an MT message transfer to a mobile station, one being reserved for MO message transfer. In an MO message transfer, the MSC shall have one SMC entity reserved for handling of an MT message.

3.2.1 Definition of primitives on the MS side

This section defines the service primitives used on the MS side. Table 3.1/GSM 04.11 gives an overview of the service primitives and main parameter linked to the primitives. All necessary control parameters to be used in the short message service are defined in section 7. All MNSMS service primitives defined in this section are passed to an SMC-entity.

Table 3.1/GSM 04.11: MNSMS service primitives on the MS-side

SERVICE PRIMITIVES		PARAMETER
NAME	TYPE	
MNSMS-ABORT-	Req	Cause
MNSMS-DATA-	Req	MT RPDU
	Ind	MO RPDU
MNSMS-EST-	Req	MO RPDU
	Ind	MT RPDU
MNSMS-ERROR-	Ind	Cause
MNSMS-REL-	Req	Cause

3.2.1.1 MNSMS-ABORT-REQuest

A request from an SMR entity to release a CM-connection in abnormal cases.

When the CM-sublayer receives this request, and if the MM connection exists, it shall form and send the CP-ERROR message. Irrespective of whether or not the CP-ERROR message was sent, the CM-sublayer shall then release the lower layer services.

3.2.1.2 MNSMS-DATA-REQUEST

A request from an SMR entity to send a RPDU on the established CM-connection.

<https://standards.iteh.ai/catalog/standards/sist/95cf6df9-a1c0-489f-9918-3635a34da5fa/sist-300-559-04-2003>

The SMC entity forms the CP-DATA message, the user information element being the RPDU, and transfers the message by means of the lower layer services.

NOTE: After reception of an incoming RP-DATA, the SMR entity typically returns the acknowledgement RP-ACK, or an error indication, RP-ERROR, to the Service Centre.

3.2.1.3 MNSMS-DATA-INDication

An indication used by the SMC entity to pass the user information element (RPDU) of a received CP-DATA message to SM-RL.

NOTE: The RPDU is typically an RP-ACK or an RP-ERROR. Normally this service is used to report the outcome of either a MO message transfer attempt or a mobile station memory available notification attempt.

3.2.1.4 MNSMS-ESTablish-REQuest

A request from an SMR entity to establish a CM-connection. The request contains a RP-DATA UNIT as a parameter. It implies the:

- establishment of a CM-connection for this SMR entity;
- forming of the CP-DATA message containing the RPDU; and
- passing of CP-DATA to the MM-sublayer.