
**Milling machine arbors with 7/24
tapers —**

**Part 1:
Dimensions and designation**

*Arbres porte-fraises au cône 7/24 —
Partie 1: Dimensions et désignation*
(standards.iteh.ai)

[ISO 839-1:2006](https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-ec9df22f5e42/iso-839-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-ec9df22f5e42/iso-839-1-2006>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 839-1:2006

<https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-ec9df22f5e42/iso-839-1-2006>

© ISO 2006

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 839-1 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 2, *High speed steel cutting tools and their attachments*.

This second edition cancels and replaces the first edition (ISO 839-1:1976), which has been technically revised.

ISO 839 consists of the following parts, under the general title *Milling machine arbors with 7/24 tapers*:

- *Part 1: Dimensions and designation*
- *Part 2: Accessories*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 839-1:2006

<https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-ec9df22f5e42/iso-839-1-2006>

Milling machine arbors with 7/24 tapers —

Part 1: Dimensions and designation

1 Scope

This part of ISO 839 specifies the dimensions of milling machine arbors with 7/24 tapers in accordance with ISO 297. It also specifies the designation of these arbors.

NOTE The accessories of these arbors (spacing collars, bearing collars and clamping nuts) are specified in ISO 839-2.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 297:1988, *7/24 tapers for tool shanks for manual changing*

[https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-](https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-9df725741/iso-839-1-2006)

ISO 2768-1:1989, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

3 Choice of dimensions and tolerances

The diameters, which have been adopted in this part of ISO 839 as the most commonly used, correspond to the values given in ISO 240 from 16 mm to 100 mm (omitting 19 mm and 70 mm).

The shoulder, whether cylindrical or tapered, between the flange of diameter d_1 and the cylindrical portion of diameter d , is optional. With or without the shoulder, however, the diameter of the flange locating face shall not in any case be less than d_2 .


4 Dimensions

4.1 General

All dimensions and tolerances are given in millimetres. Tolerances not specified shall be of tolerance class m, in accordance with ISO 2768-1:1989.

4.2 Principal dimensions

The principal dimensions of milling machine arbors with 7/24 tapers are shown in Figure 1 and given in Table 1.

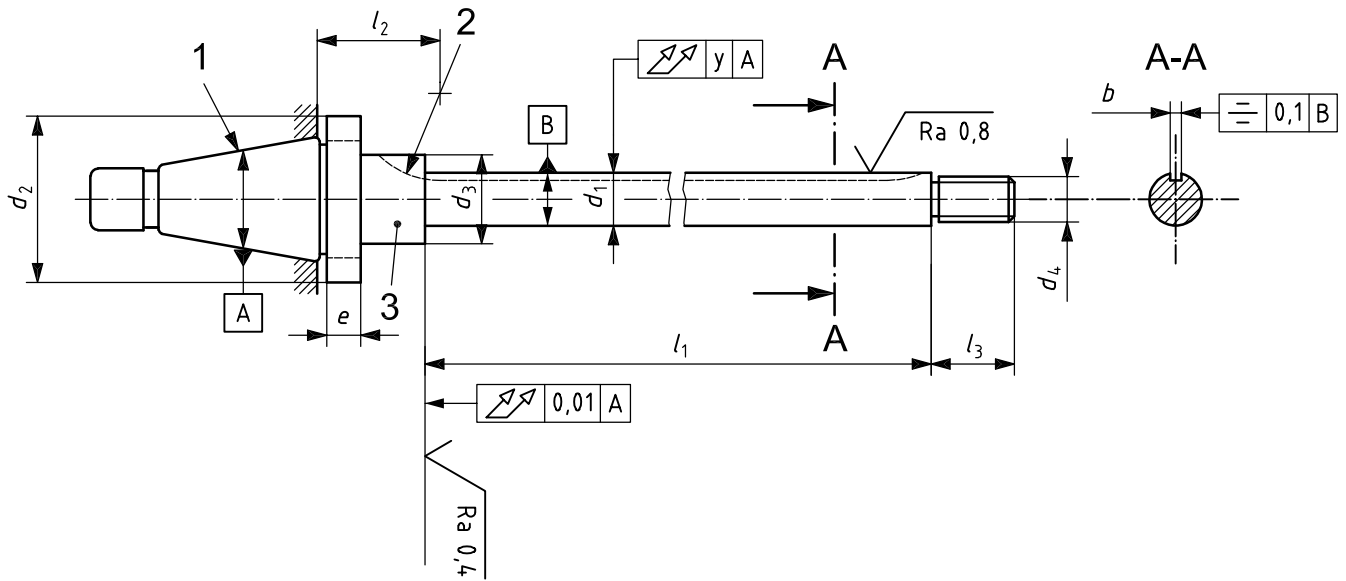

Key

- 1 7/24 taper in accordance with ISO 297
- 2 cutter radius
- 3 cylindrical or taper

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Figure 1 — Principal dimensions of milling machine arbors with 7/24 tapers

ISO 839-1:2006

<https://standards.iteh.ai/catalog/standards/sist/86bc230a-5eed-4ddd-bfe4-ec9df22f5e42/iso-839-1-2006>

Table 1 — Principal dimensions of milling machine arbors with 7/24 tapers

7/24 taper No.	b N11	d ₁	d ₂	d ₃	d ₄	e	Useful length l ₁											l ₂	l ₃			
							63	100	160	200	250	315	400	500	630	800	1 000					
30	4	16	50	27	M 16 × 1,5	8	—	—	—	—	—	—	—	—	—	—	—	18				
	6	22		34	M 20 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	24			
	7	27		41	M 24 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	—	30		
40	4	16	63	27	M 16 × 1,5	10	—	—	—	—	—	—	—	—	—	—	—	18				
	6	22		34	M 20 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	24			
	7	27		41	M 24 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	—	30		
	8	32		47	M 30 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	—	34		
	10	40		55	M 36 × 2		—	—	—	—	—	—	—	—	—	—	—	—	—	42		
50	6	22	100	34	M 20 × 1,5	12	—	—	—	—	—	—	—	—	—	—	—	24				
	7	27		41	M 24 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	30			
	8	32		47	M 30 × 1,5		—	—	—	—	—	—	—	—	—	—	—	—	—	34		
	10	40		55	M 36 × 2		—	—	—	—	—	—	—	—	—	—	—	—	—	42		
	12	50		69	M 42 × 2		—	—	—	—	—	—	—	—	—	—	—	—	—	48		
60	14	60	160	84	M 52 × 2	16	—	—	—	—	—	—	—	—	—	—	—	58				
	12	50		69	M 42 × 2		—	—	—	—	—	—	—	—	—	—	—	—	48			
	14	60		84	M 52 × 2		—	—	—	—	—	—	—	—	—	—	—	—	—	58		
	18	80		109	M 68 × 3		—	—	—	—	—	—	—	—	—	—	—	—	—	72		
24	100	134	M 80 × 4	—	—	—	—	—	—	—	—	—	—	—	—	—	82					
y according to length							0,015											0,020	0,030	0,035	0,04	—

4.3 Pilot at end of arbor

The dimensions of the pilot at the end of the arbor are shown in Figure 2 and given in Table 2.

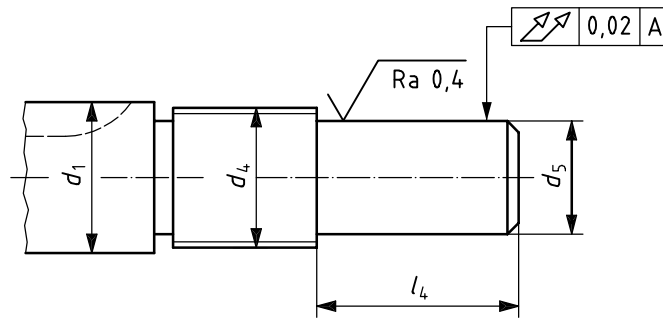


Figure 2 — Dimensions of pilot at end of arbor

Table 2 — Dimensions of pilot at end of arbor

d_1	d_4	d_5 g6	l_4
16	M 16 × 1,5	13	20
22	M 20 × 1,5	16	25
27	M 24 × 1,5	20	32
32	M 30 × 1,5	23	32
40	M 36 × 2	29	56
50	M 42 × 2	34	56
60	M 52 × 2	40	56

4.4 Protective boss at end of arbor

The dimensions of the protective boss at the end of the arbor are shown in Figure 3 and given in Table 3.

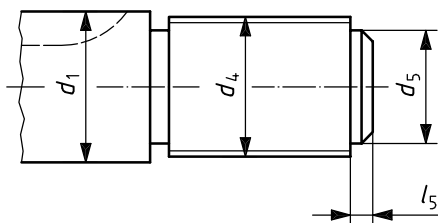


Figure 3 — Dimensions of protective boss at end of arbor

Table 3 — Dimensions of protective boss at end of arbor

d_1	d_4	d_5	l_5 min.
16	M 16 × 1,5	13	2
22	M 20 × 1,5	16	
27	M 24 × 1,5	20	
32	M 30 × 1,5	23	3
40	M 36 × 2	29	
50	M 42 × 2	34	
60	M 52 × 2	40	5
80	M 68 × 3	49	
100	M 80 × 4	61	

5 Material

The material is at the option of the manufacturer; however, the tensile strength shall be at least 800 N/mm².

Hardness shall be 56 +4HRC.

6 Designation

A milling machine arbor with 7/24 taper in accordance with this part of ISO 839 shall be designated by:

- “Arbor”;
- reference to this part of ISO 839, i.e. “ISO 839-1”;
- dash;
- 7/24 taper number/dimension of d_1 ;
- information as to whether the end of arbor is protected or piloted, or nothing.

EXAMPLE Designation of a milling machine arbor with 7/24 taper in accordance with ISO 839-1, 7/24 taper No. 40, $d_1 = 8$ mm and with protected end of arbor:

Arbor ISO 839-1 - 40/8 protected