

ETSI TS 103 145 V1.1.1 (2015-01)



Reconfigurable Radio Systems (RRS); System Architecture and High Level Procedures for Coordinated and Uncoordinated Use of TV White Spaces

PREVIEW
Full standard for download
https://standards.iteh.ai/catalog/standards/sist/25502d3e-d16a-4491-b8c0-580134f79ae4/etsi-ts-103-145-v1.1.1-2015-01

ReferenceDTS/RRS-01019

Keywordsarchitecture, GLDB, system, white space

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2015.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	6
Foreword.....	6
Modal verbs terminology.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definitions and abbreviations.....	8
3.1 Definitions.....	8
3.2 Abbreviations	8
4 Functional Architecture.....	9
4.1 Overview of Functional Architecture.....	9
4.2 Coordinated Usage of White Spaces	10
4.2.1 Spectrum coordination.....	10
4.2.1.1 Overview.....	10
4.2.1.2 Information service	10
4.2.1.3 Management service.....	10
4.2.2 High level operation sequence.....	10
4.3 Uncoordinated Usage of White Spaces.....	11
4.3.1 High level operation sequence.....	11
5 Detailed Functional Architecture	11
5.1 Architecture Description	11
5.2 Functional Description of Components.....	12
5.2.1 Database function	12
5.2.2 Geo-location function.....	12
5.2.3 Spectrum coordination function.....	13
5.2.4 Control function.....	14
5.2.5 Communication function	14
5.2.6 Interface function.....	14
5.3 Reference Points.....	15
5.3.1 Reference point A: Between a GLDB and a CRS.....	15
5.3.2 Reference point B: Between a CRS and a SC.....	16
5.3.3 Reference point C: Between SCs.....	16
5.3.4 Reference point D: Between a SC and a GLDB	17
5.4 Potential Interaction of Functionality within the spectrum coordination function	18
6 High Level Procedures	19
6.1 Procedures for Coordinated Access of White Spaces.....	19
6.1.1 Initialization procedures	19
6.1.2 Coordination service subscription procedures	19
6.1.2.1 Overview.....	19
6.1.2.2 CRS subscription procedure.....	20
6.1.2.3 CRS subscription update procedure	20
6.1.2.4 CRS subscription change procedure	21
6.1.3 Registration and authentication procedures	22
6.1.3.1 Overview	22
6.1.3.2 CRS registration procedure.....	22
6.1.3.3 CRS registration update procedure	23
6.1.3.4 Procedure for CRS deregistration from SC.....	24
6.1.3.5 SC authentication and registration procedure	24
6.1.3.6 SC de-authentication and de-registration procedure	25
6.1.4 Channel Access Procedures	26
6.1.4.1 Requesting CRS channel access procedure.....	26

6.1.4.2	Requesting SC channel access procedure	27
6.1.4.3	Providing available channel list procedure	28
6.1.4.4	Procedure of channel usage notification for subject CRS	28
6.1.4.5	Procedure for GLDB to SC Notification for CRS operational parameters update	29
6.1.4.6	CRS's operational parameters update request procedure from SC for incumbent protection.....	30
6.1.4.7	Basic Channel Access Sequence	32
6.1.4.8	Channel Access Sequence for Priority-Based Channel Assignment	33
6.1.5	Information exchange procedures.....	34
6.1.5.1	Providing coordination report procedure	34
6.1.6	Sensing and Measurement Procedures and Operation Sequences	35
6.1.6.1	Overview	35
6.1.6.2	Requesting measurements procedure	35
6.1.6.3	Providing periodic measurements procedure	36
6.1.6.4	Providing single measurements procedure.....	36
6.1.6.5	Non-Periodic measurements sequence.....	37
6.1.6.6	Event-Triggered Measurement Sequence	38
6.1.7	Reconfiguration Procedures and Operation Sequences	39
6.1.7.1	Reconfiguration request from SC to CRS procedure	39
6.1.7.2	Reconfiguration request from SC to GLDB procedure.....	40
6.1.7.3	General reconfiguration sequence between coordinated CRSs.....	40
6.1.7.4	CRS Request-Triggered Operational Parameter Reconfiguration.....	42
6.1.7.5	CRS-Measurement Triggered Priority-Based Operational Parameter Reconfiguration.....	45
6.1.7.6	General Priority-Based Channel Reconfiguration Sequence.....	47
6.1.7.7	Management of uncoordinated CRSs considering priority usage of coordinated CRSs	48
6.1.7.8	Priority Usage Request Considering Uncoordinated Channel Usage.....	49
6.1.7.8.1	Overview	49
6.1.7.8.2	Implementation Option A	49
6.1.7.8.3	Implementation Option B	51
6.1.7.9	Uncoordinated CRS Request Considering Priority Usage Coordinated CRS	55
6.1.7.9.1	Overview	55
6.1.7.9.2	Implementation Option A.....	56
6.1.7.9.3	Implementation Option B	56
6.1.7.10	Device parameter reconfiguration request from SC to CRS procedure.....	58
6.1.7.11	General sequence of device parameter reconfiguration request from SC to CRS for facilitating coexistence among CRSs	59
6.1.8	Inter-SC procedures	60
6.1.8.1	Reconfiguration request from master SC to CRS registered to slave SC procedure	60
6.1.8.2	Master/slave SC configuration procedure	61
6.1.8.3	Obtaining coordination set information from other SCs procedure	62
6.1.8.4	Procedures for interfering SCs discovery.....	63
6.1.8.4.1	Overview	63
6.1.8.4.2	GLDB-aided potential interfering SCs discovery procedure.....	63
6.1.8.4.3	Interfering SCs discovery procedure	64
6.1.8.5	Negotiation between SCs procedure	65
6.1.8.6	Operational Sequences for negotiation-based configuration of SCs	66
6.2	Procedures for Uncoordinated Access of White Spaces.....	67
7	Potential Implementation Architectures.....	68
7.1	High level flow chart of entities	68
7.1.1	CRS operation.....	68
7.1.1.1	General description	68
7.1.2	SC operation	72
7.1.2.1	General description	72
7.1.3	GLDB operation	77
7.1.3.1	General description	77
Annex A (informative): High Level Spectrum Management Algorithms for White Spaces		80
A.1	Coexistence decision algorithms	80
A.1.1	Algorithm based on co-channel sharing via CRS network geometry classification	80
A.1.1.1	Introduction.....	80
A.1.1.2	Network geometry classification	80
A.1.1.3	Algorithm description	84

A.1.2	Control of spectrum utilization based on the number of CRSs	85
A.1.2.1	Introduction.....	85
A.1.2.2	Flowchart of the algorithm	86
A.1.3	Control of coordinated CRSs for reduced transmit power fluctuation	88
A.1.3.1	Introduction.....	88
A.1.3.2	Flowchart of the algorithm	88
A.1.4	Spectrum rearrangement among CRSs.....	89
A.1.4.1	Introduction.....	89
A.1.4.2	Flowchart of the algorithm	90
A.1.5	Resource allocation based on channel ranking.....	91
A.1.5.1	Introduction.....	91
A.1.5.2	Flowchart of the algorithm	92
A.2	Priority access management algorithms	93
A.2.1	Control of non-priority access CRSs for CRS with priority access.....	93
A.2.1.1	Introduction.....	93
A.2.1.2	Flowchart of the algorithm	94
Annex B (informative): Possible Physical implementation examples of logical functions in coordinated usage of white spaces		96
B.1	Possible Physical implementation examples	96
B.1.1	Third party database management.....	96
B.1.2	GLDB with spectrum coordination function	96
B.1.3	CRS with spectrum coordination function	97
B.1.4	Spectrum coordination for Multi-operators.....	98
History	99

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/25502d3e-d16a-4491-b8c0-580134f79ae4/etsi-ts-103-145-v1.1.1>
 2015-01

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Reconfigurable Radio Systems (RRS).

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "may not", "need", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and "must not" are **NOT** allowed in ETSI deliverables except when used in direct citation.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
https://standards.iteh.ai/catalog/standards/sis/25502d3e-
d16a-4491-b8c0-580134f79ae4/etsi-ts-103-145-v1.1.1-
2015-01

1 Scope

The present document defines the system architecture for the use of spectrum by White Space Devices (WSDs), specifically in the UHF TV Bands. The architecture stems from ETSI TS 102 946 [1]. The scope of the present document is to define the architecture of a system which can allow operation of WSDs based on information obtained from Geo-location databases. The architecture will consider both uncoordinated use of White Space (where there is no attempt to manage the usage of channels by different WSDs) as well as coordinated use of White Space (where some form of channel management and/or coexistence techniques are employed to efficiently use the White Space).

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 102 946: "Reconfigurable Radio Systems (RRS); System requirements for Operation in UHF TV Band White Spaces".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI TR 103 067: "Reconfigurable Radio Systems (RRS); Feasibility study on Radio Frequency (RF) performance for Cognitive Radio Systems operating in UHF TV band White Spaces".
- [i.2] ECC Report 186: "Technical and operational requirements for the operation of white space devices under geo-location approach".
- [i.3] IEEE 802.22: "Cognitive Radio Wireless Regional Area Networks (WRAN) Medium Access Control (MAC) and Physical Layer (PHY) Specifications: Policies and Procedures for Operation in the Bands that Allow Spectrum Sharing where the Communications Devices may Opportunistically Operate in the Spectrum of the Primary Service".
- [i.4] IEEE 802.11: "Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications".
- [i.5] ETSI EN 301 598 (V1.1.1): "White Space Devices (WSD); Wireless Access Systems operating in the 470 MHz to 790 MHz TV broadcast band; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

coexistence: situation in which one radio system operates in an environment where another radio system having potentially different characteristics (e.g. RAT) may be using the same or different channels, and both radio systems are able to operate with some tolerable impact to each other

coordinated use of white spaces: case when each CRS uses available white space resources obtained with the help of the geo-location database and with additional knowledge of spectrum usage by its neighbour CRSs by the SC

NOTE: The case in which the SC assigns directly channels to the CRSs is also part of the coordinated use of white spaces.

coordination: ability of managing two or more CRSs to allow them to follow pre-determined operation policies such as coexistence among coordinated CRSs

coordination report: information to the CRS to make coordination decisions on its operational parameters in the information service

NOTE: This includes channel usage information, output power level, channel availability time, sensing information, as well as some initial ranking of the available channels.

coordination set: set of CRSs which may affect the performance of the CRS they are associated to

Geo-Location Database (GLDB): database approved by the relevant national regulatory authority which can communicate with WSDs and provide information on TVWS channel availability

NOTE 1: Information provided by a GLDB will include the available frequencies and associated maximum EIRP values that the WSD is permitted to use which allow for protection of the incumbent service and are derived from information provided by the WSD and the minimum required ACLR of the WSD.

NOTE 2: The GLDB consists of database and geo-location functions.

priority-based channel assignment: assignment of a channel by the SC to a CRS in such a way that the CRS can operate *alone* in such channel for a specific reservation period and in a specific area based on particular minimum protection requirements of the CRS

NOTE: CRSs assigned such channels with therefore have priority over other CRSs.

Spectrum Coordinator (SC): entity that coordinates spectrum usage of CRS based on the information obtained from geo-location database as well as supplemental spectrum usage data from different CRSs using its service

uncoordinated use of white spaces: case when each CRS independently uses available white space resources obtained with the help of the geo-location database without any help from the spectrum coordination function to coordinate spectrum usage with its neighbour CRSs

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACLR	Adjacent Channel Leakage Ratio
BC	Branch Condition
Com-SAP	Communication Service Access Point
CR	Cognitive Radio
CRS	Cogitative Radio System
C-SAP	Control Service Access Point
CSMA	Carrier Sense Multiple Access
DB-SAP	DataBase-Service Access Point
DS	Decision Status

DTV	Digital TV
EIRP	Effective Isotropic Radiated Power
GLDB	Geo-Location Database
GL-SAP	GeoLocation-Service Access Point
NAV	Network Allocation Vector
NRA	National Regulatory Authority
QoS	Quality of Service
RAT	Radio Access Technology
SAP	Service Access Point
SC	Spectrum Coordinator
SC-SAP	Spectrum Coordinator Service Access Point
SINR	Signal to Interference plus Noise Ratio
TV	TeleVision
TVWS	TV White Space
UHF	Ultra High Frequency
WSD	White Space Device

4 Functional Architecture

4.1 Overview of Functional Architecture

Figure 4.1 shows the high level functional architecture of a white space system. All the system requirements specified in ETSI TS 102 946 [1] shall be supported.

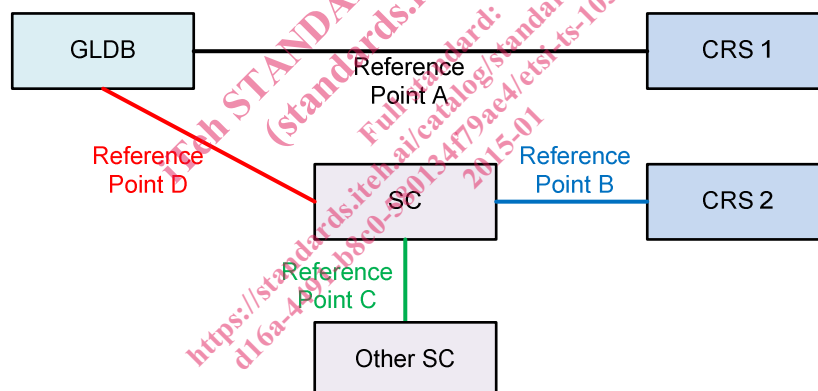


Figure 4.1: Overview of TV white spaces system

The TV white space system has three entities:

- Cognitive Radio System (CRS);
- Spectrum Coordinator (SC);
- Geolocation Database (GLDB);

and four reference points (A, B, C, and D), as shown in figure 4.1.

Each entity is defined by its functional roles and reference points with other entities.

The cognitive radio system (CRS) represents a white spaces device (WSD) or network of WSDs (i.e. a master WSD and some slave WSDs). The CRS uses available white space resources obtained with the help of geo-location database (GLDB) and/or with additional knowledge of spectrum usage by its neighbour CRSs provided by the spectrum coordinator (SC).

The GLDB provides a WSD in a CRS with location specific information on the available frequencies and associated maximum EIRP values that the WSD is permitted to use. This will allow for protection of the incumbent service and is derived from information provided by the WSD and the minimum required Adjacent Channel Leakage Ratio (ACLR) of the WSD itself.

The SC is responsible for coordinating spectrum usage of CRSs based on the information obtained from GLDB as well as additional spectrum usage data from different CRSs using its service. Different SCs are capable of communicating with each other.

4.2 Coordinated Usage of White Spaces

4.2.1 Spectrum coordination

4.2.1.1 Overview

Spectrum coordination is the mechanism with which an SC serves CRSs so that they can operate efficiently in available spectrum resources of white spaces. The SC coordinates how to manage radio resources among a set of CRSs that are potentially interfering with each other (coexistence) and allows for channel assignment requested by a CRS that wishes to operate alone on a channel and with priority over other CRSs (priority-based channel assignment). The priority-based channel assignment is managed by the SC based on some minimum protection requirements requested by the CRS, which includes minimum bandwidth, minimum SINR (or maximum allowable interference), and some guaranteed minimum availability time. The SC translates these requirements into protection criteria, which are used by the GLDB to ensure that the priority-based channel assignment is maintained in the presence of other WSDs not using the SC. The algorithms to enable coexistence and/or priority-based channel assignment are described in the following clause. From the perspective of the CRSs, coexistence and priority-based channel assignment are provided as a set of two available SC services: the information service (for coexistence only) and the management service (for both coexistence and priority-based channel assignment). Each SC shall provide at least the information service or the management service for CRSs but can also provide both of them. The information service and the management service are described in clauses 4.2.1.2 and 4.2.1.3.

4.2.1.2 Information service

For CRSs that are subscribed to the information service, an SC provides information about useful operational parameters (e.g. the operational parameters of other CRS in the available spectrum resources). In the information service, an SC does not make decision on the operational parameters to be used by those CRSs, but rather, all decisions are made by the CRS itself. However, the SC may process information about the current usage of spectrum to provide to the CRS in a manner which may facilitate the CRS decision (such as ranking the potential operational parameters according to the resulting expected performance).

4.2.1.3 Management service

For CRSs that are subscribed to the management service, a SC provides the operational parameters to be used by a CRS based on its requests and, potentially, certain QoS and usage time requirements. A CRS does not make any decision for its operational parameters (e.g. channel and transmit power) but they are determined by the SC itself.

4.2.2 High level operation sequence

An overview of coordinated usage of white spaces is shown in figure 4.2.

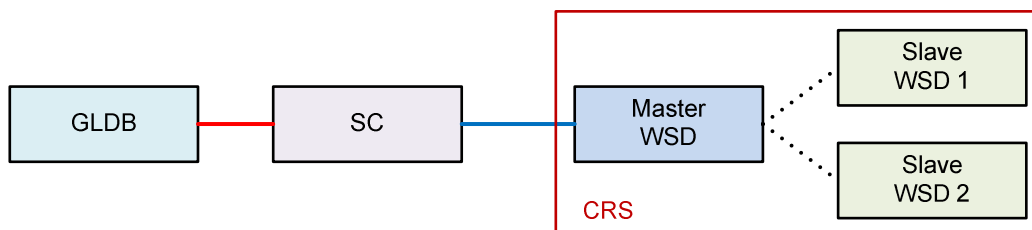


Figure 4.2: Overview of coordinated usage of white spaces system

A CRS consists of a master WSD and one or more slave WSDs. The master WSD sends device parameters to a GLDB via the SC. The SC shall act as relay and can also store the device parameters of the master WSD. The SC, during the process, maintains additional data about spectrum usage of the different CRSs using its service. This additional data contains information that reflects the current state of spectrum usage, including spectrum measurement data from WSDs, and usage maps or areas of occupancy of the different CRSs. It also contains parameters specific to the Radio Access Technology of each CRS that facilitates coexistence. A GLDB shall receive information from the master WSD about the characteristics of that WSD in order to generate operational parameters for that WSD. The GLDB provides specific operational parameters to the master WSD via the SC. During this process, the SC determines the operational parameters using the information obtained from the GLDB as well as the additional data about spectrum usage of the different CRSs, and sends these operational parameters to the master WSD in response to the request for white space access. The operational parameters determined by the SC shall not violate the protection criteria of the incumbent, and are therefore compliant with the information obtained from the GLDB. The master WSD then sends the selected channel usage parameter to the GLDB via the SC [i.2]. The SC will also update its additional spectrum usage data based on information sent by the WSD. At any time in the process of assigning channels to the CRSs, the SC could reconfigure the channel usage of the CRSs to ensure an efficient use of spectrum, such as reducing fragmentation in the available spectrum. The GLDB can use channel usage parameters sent by the SC to ensure that WSDs can operate in the presence of other WSDs not using the SC.

4.3 Uncoordinated Usage of White Spaces

4.3.1 High level operation sequence

An overview of uncoordinated usage of white spaces is shown in figure 4.3.

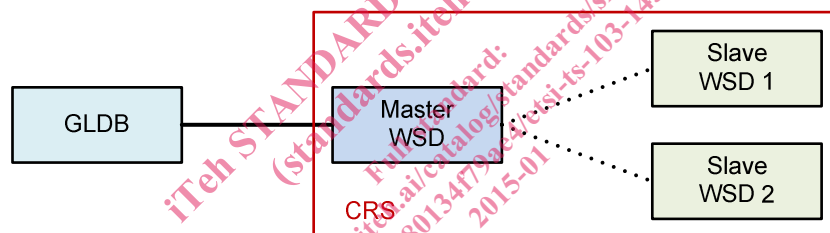


Figure 4.3: Overview of uncoordinated usage of white spaces system

A CRS consists of a master WSD and one or more slave WSDs. The master WSD shall communicate with a GLDB to obtain its operational parameters in white spaces. A GLDB shall receive information from a WSD about the characteristics of that WSD in order to generate operational parameter for that WSD. A GLDB shall maintain a record of the actual usage of the white spaces. This information could be used to enable WSDs to be readily identified if interference to incumbent users were to occur, and to allow the GLDB to know the extent to which available white spaces are being used.

5 Detailed Functional Architecture

5.1 Architecture Description

The overall system reference model is shown in figure 5.1.

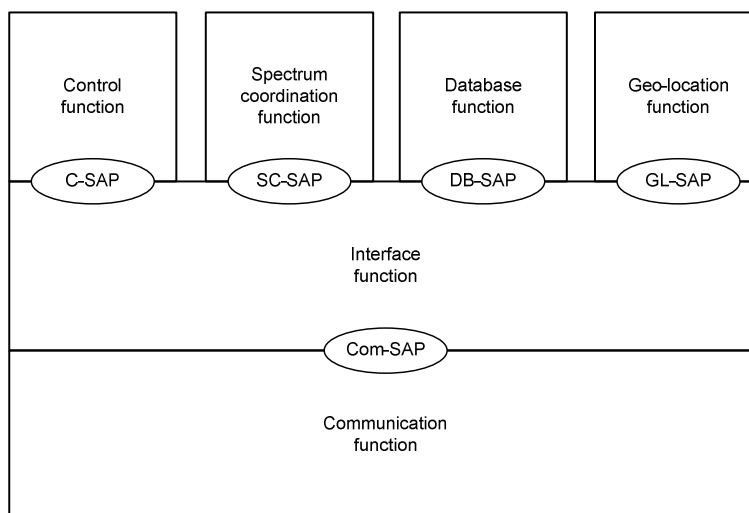


Figure 5.1: Overall system reference model

There are six logical functions for operating white space system: control function, spectrum coordination function, database function and geo-location function are the 4 key components for the system. Two additional functions (the interface function and the communication function) are general components for the system. Physical implementation examples of the overall system reference model are shown in annex B. Clause 5.2 describes in more detail the six identified logical functions.

5.2 Functional Description of Components

5.2.1 Database function

A database function is a software/hardware module that stores necessary information provided by regulators for calculating the available spectrum that a WSD in a CRS can operate on (with protection to incumbent services) as well as registration of the WSDs under regulatory requirements and for the purposes of protecting incumbent services. The reference model of database function is shown in figure 5.2.




Figure 5.2: Reference model of a database function

The database function service access point (SAP) is the database SAP (DB-SAP). The DB-SAP is used by the interface function to access the services provided by the database function such as registration of CRS and provision of incumbent information.

5.2.2 Geo-location function

A geo-location function is a software/hardware module that supports the following functions:

- To calculate location specific available frequency band and associated maximum EIRP that a WSD in a CRS can use based on the information on incumbents stored in database function.
- To Interact with the SC for management of uncoordinated CRSs when considering priority usage coordinated CRSs.

The reference model of the geo-location function is shown in figure 5.3.




Figure 5.3: Reference model of a geo-location function

The geo-location function service access point (SAP) is the geo-location SAP (GL-SAP). GL-SAP is used by the interface function to access the services provided by the geo-location function such as calculation of location specific EIRP of a frequency band and that a WSD in a CRS can use.

5.2.3 Spectrum coordination function

A spectrum coordination function is a software/hardware module that coordinates spectrum usage of CRSs based on the information obtained from geo-location database and additional data about the spectrum usage of the different CRSs using the services of the SC. The reference model of spectrum coordination function is shown in figure 5.4. Depending on the implementation and location of the spectrum coordination function in the system (see annex B for examples) the spectrum coordination function will have one or more of the following functionalities:

Coexistence functionality: This functionality assures proper operation between different WSDs that utilize the white space, and avoidance of harmful interference between different CRSs using the same and/or adjacent channels.

Sensing and measurement functionality: The sensing functionality is responsible for the configuration of sensing in the CRS as well as the collection and combined processing of the sensing results and the measurements specific of the RAT that the CRS is using.

Priority-Based Channel assignment and negotiation functionality: This functionality allows certain CRSs or other spectrum coordination functions to assign channels and provides the necessary means for negotiation between different CRSs which may request a priority-based channel assignment for periods of time.

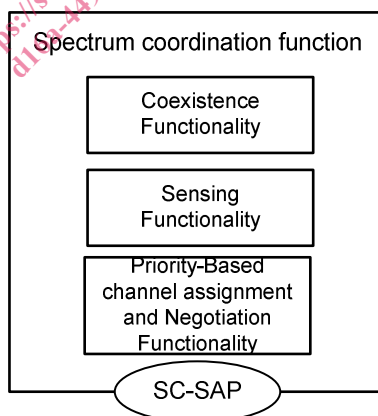


Figure 5.4: Reference model of spectrum coordination function

The spectrum coordination function service access point is the spectrum coordination SAP (SC-SAP). The coexistence functionality, sensing functionality, and priority usage and negotiation functionality all communicate with functions outside of the spectrum coordination function using the same SC-SAP. SC-SAP is used by the interface function to access the services provided by the spectrum function such as calculation of coordination parameters based on coexistence algorithms, priority-based channel assignment algorithms and etc. that a WSD in a CRS can use.