
**Diesel engines — NOx reduction agent
AUS 32 —**

**Part 4:
Refilling interface**

Moteurs diesel — Agent AUS 32 de réduction des NOx —

Partie 4: Interface de remplissage

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22241-4:2009

<https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009>



Reference number
ISO 22241-4:2009(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22241-4:2009

<https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Requirements	2
4.1 Functional requirements	2
4.2 Filler neck	4
4.3 Inlet adapter.....	4
4.4 Filler cap	5
4.5 Filler nozzle	6
4.6 Minimum free space for refilling	7
Annex A (informative) Compatibility conditions for sealed refilling systems	10
Bibliography	13

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 22241-4:2009

<https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 22241-4 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 5, *Engine tests*.

ISO 22241 consists of the following parts, under the general title *Diesel engines — NO_x reduction agent AUS 32*:

- *Part 1: Quality requirements*
- *Part 2: Test methods*
- *Part 3: Handling, transportation and storing*
- *Part 4: Refilling interface*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 22241-4:2009](https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009)

<https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009>

Diesel engines — NOx reduction agent AUS 32 —

Part 4: Refilling interface

1 Scope

This part of ISO 22241 specifies the refilling interface for the NOx reduction agent AUS 32 in compliance with ISO 22241-1, which is needed to operate converters with a selective catalytic reduction (SCR) exhaust treatment system.

This part of ISO 22241 specifies the minimum functional and geometric requirements of an open refilling system, in order to ensure compatibility between the on-board refilling system and the off-board refilling system. Compatibility conditions for a sealed refilling system are provided in Annex A.

This part of ISO 22241 applies to commercial vehicles and buses as defined in ISO 3833 and having a gross vehicle mass of more than 3,5 t, designed to use stationary off-board refilling systems. This part of ISO 22241 also applies to the nozzle of stationary off-board refilling systems.

NOTE Throughout this part of ISO 22241, the term “NOx reduction agent AUS 32” is abbreviated as “AUS 32”.

[ISO 22241-4:2009](https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009)

[https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-](https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009)

[b590b4a8e378/iso-22241-4-2009](https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009)

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2575, *Road vehicles — Symbols for controls, indicators and tell-tales*

ISO 22241-1, *Diesel engines — NOx reduction agent AUS 32 — Part 1: Quality requirements*

ISO 22241-3, *Diesel engine — NOx reduction agent AUS 32 — Part 3: Handling, transportation and storing*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

refilling system

off-board system and on-board system, including their refilling interface, for dispensing AUS 32 into the on-board tank of the **vehicle** (3.6)

3.2

off-board refilling system

stationary equipment for dispensing AUS 32 into the on-board tank of the **vehicle** (3.6), consisting typically of tank, pump, hose and **filler nozzle** (3.2.1)

3.2.1

filler nozzle

interfacing part of the **off-board refilling system** (3.2), which allows the operator to control the flow of AUS 32 during the filling, consisting of a nozzle spout with a defined interface geometry and an automatic shut-off system

3.3

on-board refilling system

equipment of the **vehicle** (3.6) necessary for refilling AUS 32 and consisting typically of an **inlet adapter** (3.3.2), **filler neck** (3.3.1), **filler cap** (3.3.3), and tank

3.3.1

filler neck

interfacing part of the **on-board refilling system** (3.3) where the opening is formed by the **inlet adapter** (3.3.2) to allow the tank to be refilled

3.3.2

inlet adapter

permanently fixed part of the **filler neck** (3.3.1), having a defined interface geometry and incorporating a magnet ring for preventing misfilling of AUS 32 into the fuel tank

3.3.3

filler cap

part which is fitted to the **filler neck** (3.3.1) to prevent spillage as well as to minimize contamination of AUS 32, and which is temporarily opened or removed for refilling

3.4

open refilling system

universal **refilling system** (3.1) for which gas tightness between the **filler nozzle** (3.2.1) and the **filler neck** (3.3.1) is not required

NOTE

The open refilling system permits refilling using a small volume container, for example.

3.5

sealed refilling system

specific **refilling system** (3.1) where the connection between the **filler nozzle** (3.2.1) and the **filler neck** (3.3.1) is gas-tight

3.6

vehicle

commercial vehicle or bus as defined in ISO 3833 and having a gross vehicle mass of more than 3,5 t, designed to use a stationary **off-board refilling system** (3.2)

4 Requirements

4.1 Functional requirements

The on-board refilling system and the off-board refilling system shall comply with the basic functional requirements specified in Table 1.


Table 1 — Basic functional requirements

Characteristic	Requirements	Remark
Maximum flow rate	≥ 20 l/min. ≤ 40 l/min.	—
Automatic shut-off of filler nozzle	Feature required in compliance with EN 13012 or equivalent Standard.	To protect against overfill.
Maximum filling level in AUS 32 on-board tank	<p>The automatic shut-off system of the nozzle shall be used to protect against filling above maximum level.</p> <p>The on-board tank shall be designed to allow for expansion of AUS 32.</p>	High volume expansion of AUS 32 during freezing (approx. 7 %).
Spillage	<p>< 30 ml per refilling with filler neck angles from the horizontal between 50° and 90°.</p> <p>< 50 ml per refilling with filler neck angles from the horizontal between 30° and 50°.</p>	To minimize the effects of spilt AUS 32 on the equipment.
Ventilation during refilling	Feature required on AUS 32 on-board tank.	—
Operational temperature range	–30 °C to +80 °C for components installed on the vehicle.	For specific regions, the temperature range specified may not be sufficient. In such cases, a wider temperature range, representative of that specific region, shall be considered.
	–20 °C to +40 °C for components at the service station.	For specific regions, the temperature range specified may be excessive. In such cases, a narrower temperature range, representative of that specific region, may be considered.
Misfilling of AUS 32 into the diesel fuel tank	≤ 80 ml per filling trial. https://standards.iteh.ai/catalog/standards/sist/39d0abe4-b59bf4a8e478/iso-22241-4-2009	The filler nozzle with magnet switch as specified in 4.5, or equivalent device, will prevent misfilling.
Misfilling of fuel into the AUS 32 on-board tank	Feature required to prevent dispensing of diesel fuel or petrol in AUS 32 on-board tank.	The inlet adapter diameter specified in 4.3 does not allow a diesel fuel or petrol nozzle to enter.
Materials	Suitable materials in accordance with ISO 22241-3 should be selected.	Materials in contact with AUS 32 shall be compatible with AUS 32 to avoid contamination of AUS 32 as well as corrosion of the devices used.
Freezing of AUS 32	<p>Provide protection at the service station.</p> <p>Vehicle parts shall be designed to cope with freezing and thawing in accordance with operational temperature range.</p>	AUS 32 freezes at –11,5 °C and has a volume increase of approximately 7 %.
Cleanness	A high level of cleanness of all components of the on-board and off-board refilling systems shall be secured during the manufacturing, assembly and installation processes, in order to minimize contamination of AUS 32.	<p>Cleanness level for the components of the off-board refilling system shall be in accordance with ISO 22241-3.</p> <p>Cleanness level for the components of the on-board refilling system shall be agreed between vehicle and component manufacturers, in compliance with state-of-the-art.</p>
Reliability and durability	The filler neck, inlet adapter and filler cap shall be designed and manufactured to be fully functional during the vehicle lifetime without any service, adjustment or replacement.	—
Crystallization ^a	Protection recommended	Contact with air should be minimized.
Marking ^a	<p>Symbol as specified in ISO 2575.</p> <p>Marking as specified in ISO 22241-1.</p>	Blue is the recommended colour for filler caps.
^a Recommendations only.		

4.2 Filler neck

The filler neck allows the vehicle manufacturer or any authorized person to install or remove an inlet adapter that can accommodate an open refilling system. For dimensional details of the filler neck, see Figure 1 and Table 2.

The geometric location and orientation of the filler neck on the vehicle should be specified by the vehicle manufacturer, taking into account the free space required for the proper application of the filler nozzle (see 4.6).

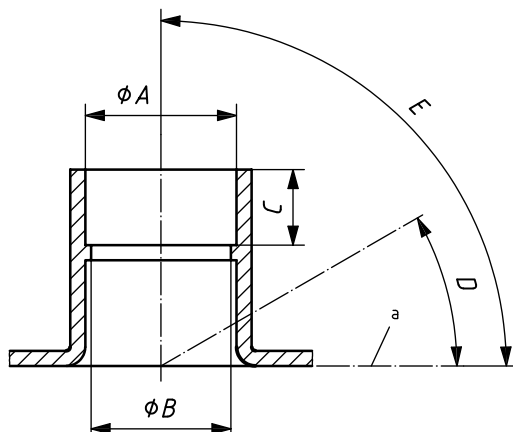

^a Horizontal.

STANDARD PREVIEW
(standards.itech.ai)

Figure 1 — Filler neck

ISO 22241-4:2009

<https://standards.itech.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b59004abc578/iso-22241-4-2009>

Table 2 — Dimensions of the filler neck

Symbol	Parameter	Dimension
ϕA	Diameter inlet or upper stop	$\geq 39,5$ mm
ϕB	Diameter upper support	≥ 37 mm
C	Height upper stop	≤ 48 mm
D	Filler neck angle from horizontal ^a	$\geq 30^{\circ}$ ^b
E		$\leq 90^{\circ}$

^a An angle between 50° and 90° is recommended to minimize spillage (see Table 1).


^b If, due to body design restrictions, an angle smaller than 30° is chosen by the designer, spillage will typically be greater and may exceed the value specified in Table 1, in which case the function of the nozzle may be limited.

4.3 Inlet adapter

The inlet adapter shall be designed to fit inside the filler neck. The internal diameter of the inlet adapter shall prevent a filler nozzle spout greater than 20,0 mm in diameter from entering the inlet adapter.

The inlet adapter shall be equipped with a magnet ring having the characteristics specified in Table 3, as shown in Figure 2.

Dimensions in millimetres

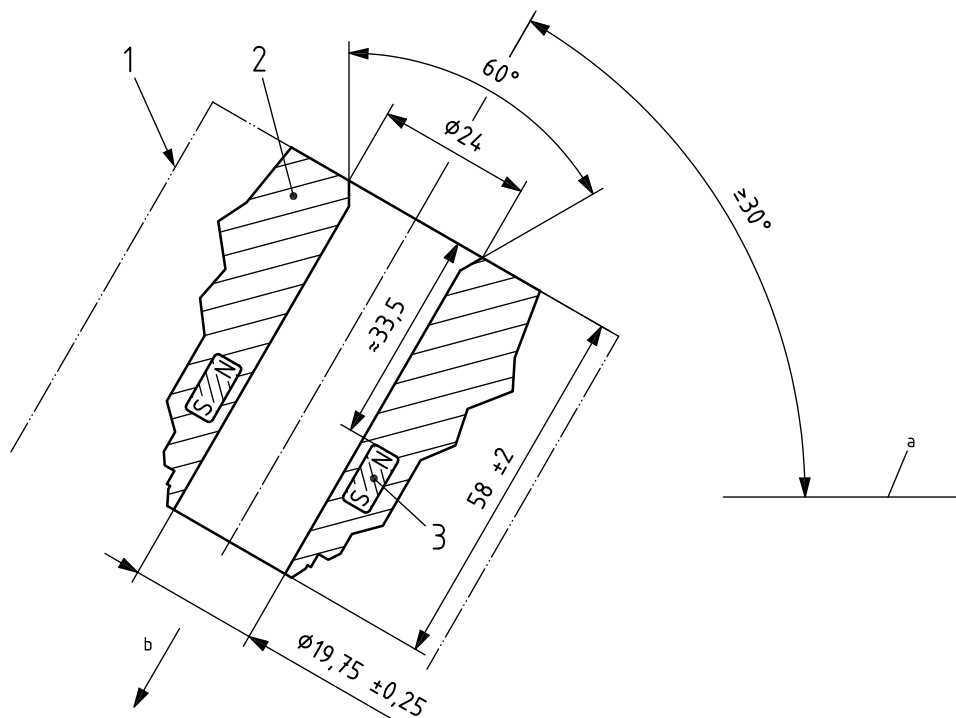**Key**

- 1 filler neck
 2 inlet adapter
 3 magnet ring
 a Horizontal.
 b Flow direction.

ISO 22241-4:2009
<https://standards.iteh.ai/catalog/standards/sist/39d0abe4-00d1-4473-b1f1-b590b4a8e378/iso-22241-4-2009>

Figure 2 — Inlet adapter**Table 3 — Magnet ring characteristics**

Parameter		Requirements
Dimensions	outer diameter	34 mm
	inner diameter	24 mm
	height	10 mm
Material		Neodymium-Iron-Boron (NdFeB)
Magnet parameter	remanence	1,2 T to 1,3 T
	coercivity	800 kA/m to 900 kA/m
Orientation		North pole pointing outwards from the tank

4.4 Filler cap

Closed filler caps shall be tight for AUS 32.

Marking and colouring of the filler cap should be as recommended in Table 1.