

# ISO

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION

## ISO RECOMMENDATION R 355

PART III

iTeh STANDARD PREVIEW

(standards.iteh.ai)

ROLLING BEARINGS  
TAPERED ROLLER BEARINGS  
BOUNDARY DIMENSIONS

ISO/R 355-3:1967

<https://standards.iteh.ai/catalog/standards/sist/311b189d-4cb5-4c7e-86ff-b52b150075e6/iso-r-355-3-1967>  
METRIC SERIES: DIAMETER SERIES 9 AND 0

1st EDITION

April 1967

COPYRIGHT RESERVED

The copyright of ISO Recommendations and ISO Standards belongs to ISO Member Bodies. Reproduction of these documents, in any country, may be authorized therefore only by the national standards organization of that country, being a member of ISO.

For each individual country the only valid standard is the national standard of that country.

Printed in Switzerland

Also issued in French and Russian. Copies to be obtained through the national standards organizations.

## BRIEF HISTORY

The ISO Recommendation R 355, *Part III, Rolling bearings — Tapered roller bearings — Boundary dimensions — Metric series: Diameter series 9 and 0*, was drawn up by Technical Committee ISO/TC 4, *Rolling bearings*, the Secretariat of which is held by the Sveriges Standardiseringskommission (SIS).

Work on this question by the Technical Committee began in 1953 and led, in 1963, to the adoption of a Draft ISO Recommendation.

In July 1964, this Draft ISO Recommendation (No. 594) was circulated to all the ISO Member Bodies for enquiry. It was approved, subject to a few modifications of an editorial nature, by the following Member Bodies:

Austria	Hungary	Romania
Brazil	India	Spain
Canada	Israel	Sweden
Chile	Italy	Switzerland
Czechoslovakia	Netherlands	U.A.R.
France	Poland	United Kingdom
Germany	Portugal	Yugoslavia

Two Member Bodies opposed the approval of the Draft:


Japan  
U.S.S.R.

The Draft ISO Recommendation was then submitted by correspondence to the ISO Council, which decided, in April 1967, to accept it as an ISO RECOMMENDATION.

ROLLING BEARINGS  
TAPERED ROLLER BEARINGS  
BOUNDARY DIMENSIONS

PART III

METRIC SERIES: DIAMETER SERIES 9 AND 0

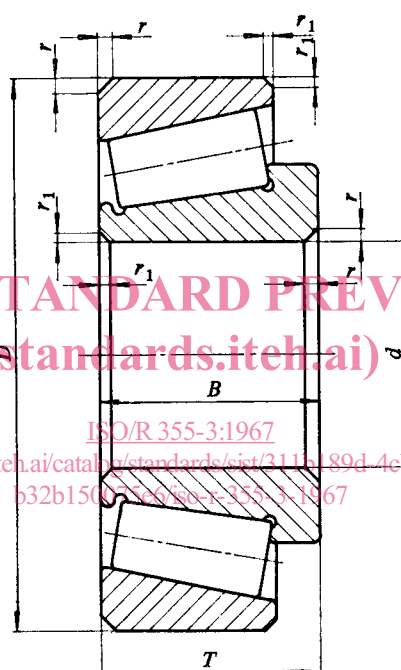

$d$  = bearing bore diameter

$D$  = bearing outside diameter

$B$  = inner ring width

$T$  = bearing width \* (width over bearing rings)

$r$  = chamfer dimension \*\* (height and width) on inner and outer ring back faces

$r_1$  = chamfer dimension \*\* (height and width) on inner and outer ring front faces

\* Attention is called to the fact that the cage may project beyond the bearing width.

\*\* Nominal chamfer dimensions do not control the shape of the bearing corner.

## 1. DIAMETER SERIES 9

## 1.1 Dimensions in millimetres

Bore diameter <i>d</i>	Outside diameter <i>D</i>	Dimension series		Chamfer	
		29	39	<i>r</i> nominal	<i>r</i> <sub>1</sub> nominal
		Width <i>B = T</i>	Width <i>B = T</i>		
20	37	12	14	0.5	0.2
25	42	12	14	0.5	0.2
30	47	12	14	0.5	0.2
35	55	14	16	1	0.3
40	62	15	17	1	0.3
45	68	15	17	1	0.3
50	72	15	17	1	0.3
55	80	17	20	1.5	0.5
60	85	17	20	1.5	0.5
65	90	17	20	1.5	0.5
70	100	20	24	1.5	0.5
75	105	20	24	1.5	0.5
80	110	20	24	1.5	0.5
85	120	23	27	2	0.8
90	125	23	27	2	0.8
95	130	23	27	2	0.8
100	140	25	31	2	0.8
105	145	25	31	2	0.8
110	150	25	31	2	0.8
120	165	29	36	2	0.8
130	180	32	39	2.5	0.8
140	190	32	39	2.5	0.8
150	210	38	47	3	1
160	220	38	—	3	1
170	230	38	—	3	1
180	250	45	—	3	1
190	260	45	—	3	1
200	280	51	—	3.5	1.2
220	300	51	—	3.5	1.2
240	320	51	—	3.5	1.2
260	360	63.5	—	3.5	1.2
280	380	63.5	—	3.5	1.2
300	420	76	—	4	1.5
320	440	76	—	4	1.5
340	460	76	—	4	1.5
360	480	76	—	4	1.5

## 1.2 Dimensions in inches

Bore diameter $d$	Outside diameter $D$	Dimension series		Chamfer	
		29	39	$r$ nominal	$r_1$ nominal
		Width $B = T$	Width $B = T$		
0.78740	1.45669	0.4724	0.5512	0.020	0.008
0.98425	1.65354	0.4724	0.5512	0.020	0.008
1.18110	1.85039	0.4724	0.5512	0.020	0.008
1.37795	2.16535	0.5512	0.6299	0.039	0.012
1.57480	2.44094	0.5906	0.6693	0.039	0.012
1.77165	2.67717	0.5906	0.6693	0.039	0.012
1.96850	2.83465	0.5906	0.6693	0.039	0.012
2.16535	3.14961	0.6693	0.7874	0.059	0.020
2.36220	3.34646	0.6693	0.7874	0.059	0.020
2.55906	3.54331	0.6693	0.7874	0.059	0.020
2.75591	3.93701	0.7874	0.9449	0.059	0.020
2.95276	4.13386	0.7874	0.9449	0.059	0.020
3.14961	4.33071	0.7874	0.9449	0.059	0.020
3.34646	4.72441	0.9055	1.0630	0.079	0.031
3.54331	4.92126	0.9055	1.0630	0.079	0.031
3.74016	5.11811	0.9055	1.0630	0.079	0.031
3.93701	5.51181	0.9843	1.2205	0.079	0.031
4.13386	5.70866	0.9843	1.2205	0.079	0.031
4.33071	5.90551	0.9843	1.2205	0.079	0.031
4.72441	6.49606	1.1417	1.4173	0.079	0.031
5.11811	7.08661	1.2598	1.5354	0.098	0.031
5.51181	7.48031	1.2598	1.5354	0.098	0.031
5.90551	8.26772	1.4961	1.8504	0.118	0.039
6.29921	8.66142	1.4961	—	0.118	0.039
6.69291	9.05512	1.4961	—	0.118	0.039
7.08661	9.84252	1.7717	—	0.118	0.039
7.48031	10.23622	1.7717	—	0.118	0.039
7.87402	11.02362	2.0079	—	0.138	0.047
8.66142	11.81102	2.0079	—	0.138	0.047
9.44882	12.59843	2.0079	—	0.138	0.047
10.23622	14.17323	2.5000	—	0.138	0.047
11.02362	14.96063	2.5000	—	0.138	0.047
11.81102	16.53543	2.9921	—	0.157	0.059
12.59843	17.32283	2.9921	—	0.157	0.059
13.38583	18.11024	2.9921	—	0.157	0.059
14.17323	18.89764	2.9921	—	0.157	0.059

## 2. DIAMETER SERIES 0

## 2.1 Dimensions in millimetres

Bore diameter <i>d</i>	Outside diameter <i>D</i>	Dimension series		Chamfer	
		20	30	<i>r</i> nominal	<i>r</i> <sub>1</sub> nominal
		Width <i>B = T</i>	Width <i>B = T</i>		
12	28	11	13	0.5	0.2
15	32	12	14	0.5	0.2
17	35	13	15	0.5	0.2
20	42	15	17	1	0.3
22	44	15	—	1	0.3
25	47	15	17	1	0.3
28	52	16	—	1.5	0.5
30	55	17	20	1.5	0.5
32	58	17	—	1.5	0.5
35	62	18	21	1.5	0.5
40	68	19	22	1.5	0.5
45	75	20	24	1.5	0.5
50	80	20	24	1.5	0.5
55	90	23	27	2	0.8
60	95	23	27	2	0.8
65	100	23	27	2	0.8
70	110	25	31	2	0.8
75	115	25	31	2	0.8
80	125	29	36	2	0.8
85	130	29	36	2	0.8
90	140	32	39	2.5	0.8
95	145	32	39	2.5	0.8
100	150	32	39	2.5	0.8
105	160	35	43	3	1
110	170	38	47	3	1
120	180	38	48	3	1
130	200	45	55	3	1
140	210	45	56	3	1
150	225	48	59	3.5	1.2
160	240	51	—	3.5	1.2
170	260	57	—	3.5	1.2
180	280	64	—	3.5	1.2
190	290	64	—	3.5	1.2
200	310	70	—	3.5	1.2
220	340	76	—	4	1.5
240	360	76	—	4	1.5
260	400	87	—	5	2
280	420	87	—	5	2
300	460	100	—	5	2
320	480	100	—	5	2

## 2.2 Dimensions in inches

Bore diameter $d$	Outside diameter $D$	Dimension series		Chamfer	
		20	30	$r$	$r_1$
		Width $B = T$	Width $B = T$	nominal	nominal
0.47244	1.10236	0.4331	0.5118	0.020	0.008
0.59055	1.25984	0.4724	0.5512	0.020	0.008
0.66929	1.37795	0.5118	0.5906	0.020	0.008
0.78740	1.65354	0.5906	0.6693	0.039	0.012
0.86614	1.73228	0.5906	—	0.039	0.012
0.98425	1.85039	0.5906	0.6693	0.039	0.012
1.10236	2.04724	0.6299	—	0.059	0.020
1.18110	2.16535	0.6693	0.7874	0.059	0.020
1.25984	2.28346	0.6693	—	0.059	0.020
1.37795	2.44094	0.7087	0.8268	0.059	0.020
1.57480	2.67717	0.7480	0.8661	0.059	0.020
1.77165	2.95276	0.7874	0.9449	0.059	0.020
1.96850	3.14961	0.7874	0.9449	0.059	0.020
2.16535	3.54331	0.9055	1.0630	0.079	0.031
2.36220	3.74016	0.9055	1.0630	0.079	0.031
2.55906	3.93701	0.9055	1.0630	0.079	0.031
2.75591	4.33071	0.9843	1.2205	0.079	0.031
2.95276	4.52756	0.9843	1.2205	0.079	0.031
3.14961	4.92126	1.1417	1.4173	0.079	0.031
3.34646	5.11811	1.1417	1.4173	0.079	0.031
3.54331	5.51181	1.2598	1.5354	0.098	0.031
3.74016	5.70866	1.2598	1.5354	0.098	0.031
3.93701	5.90551	1.2598	1.5354	0.098	0.031
4.13386	6.29921	1.3780	1.6929	0.118	0.039
4.33071	6.69291	1.4961	1.8504	0.118	0.039
4.72441	7.08661	1.4961	1.8898	0.118	0.039
5.11811	7.87402	1.7717	2.1654	0.118	0.039
5.51181	8.26772	1.7717	2.2047	0.118	0.039
5.90551	8.85827	1.8898	2.3228	0.138	0.047
6.29921	9.44882	2.0079	—	0.138	0.047
6.69291	10.23622	2.2441	—	0.138	0.047
7.08661	11.02362	2.5197	—	0.138	0.047
7.48031	11.41732	2.5197	—	0.138	0.047
7.87402	12.20472	2.7559	—	0.138	0.047
8.66142	13.38583	2.9921	—	0.157	0.059
9.44882	14.17323	2.9921	—	0.157	0.059
10.23622	15.74803	3.4252	—	0.197	0.079
11.02362	16.53543	3.4252	—	0.197	0.079
11.81102	18.11024	3.9370	—	0.197	0.079
12.59843	18.89764	3.9370	—	0.197	0.079

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/R 355-3:1967](#)

<https://standards.iteh.ai/catalog/standards/sist/311b189d-4cb5-4c7c-8fff-b32b150075e6/iso-r-355-3-1967>