



SLOVENSKI STANDARD
SIST ETS 300 396-5 E1:2003
01-december-2003

Df]nYa b]gbc dc j b]fUX]c`fH9HF5LĚHYM b] bY'nU hYj Y'nU bYdcgfYXb]`bU]b
XYcj Ub`UfB ACĚĚ) "XY. FUX]g_]j a Ygb]`dfY cXU

Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 5: Gateway air interface

ITeH STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ETS 300 396-5 Edition 1**
<https://standards.iteh.ai/catalog/standards/sist/240c913d-9cae-4294-a2ba-cb59c295a414/sist-ets-300-396-5-e1-2003>

ICS:


33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	---------------------------------	-----------------------------------

SIST ETS 300 396-5 E1:2003 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 396-5 E1:2003](https://standards.iteh.ai/catalog/standards/sist/240c913d-9cae-4294-a2ba-cb59c295a414/sist-ets-300-396-5-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/240c913d-9cae-4294-a2ba-cb59c295a414/sist-ets-300-396-5-e1-2003>

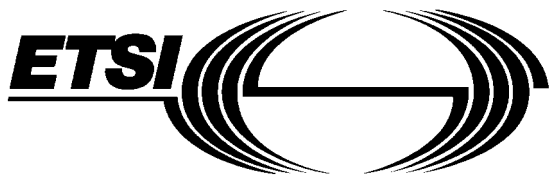

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 396-5

January 2000

Source: TETRA

Reference: DE/TETRA-02007-5

ICS: 33.020

Key words: DMO, radio, security, TETRA

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Terrestrial Trunked Radio (TETRA);
Technical requirements for Direct Mode Operation (DMO);
Part 5: Gateway air interface

SIST ETS 300 396-5 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/300-396-5-e1-2003/cb59c295a414/sist-ets-300-396-5-e1-2003>

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

Internet: secretariat@etsi.fr - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 396-5 E1:2003](https://standards.iteh.ai/catalog/standards/sist/240c913d-9cae-4294-a2ba-cb59c295a414/sist-ets-300-396-5-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/240c913d-9cae-4294-a2ba-cb59c295a414/sist-ets-300-396-5-e1-2003>

Contents

Foreword.....	19
1 Scope	21
2 Normative references	21
3 Definitions and abbreviations	22
3.1 Definitions	22
3.2 Abbreviations	24
4 Overview of protocol.....	25
4.1 General	25
4.2 The DM channel.....	26
4.3 DM call procedures for operation with a gateway	27
4.3.1 Constraints on the frame structure	29
4.3.2 Setting up a call through a DM-GATE	29
4.3.2.1 Group call from V+D to DM-MS via a DM-GATE.....	29
4.3.2.3 Individual call from V+D MS to DM-MS via a DM-GATE	36
4.3.2.4 Individual call from DM-MS to V+D MS via a DM-GATE	39
4.3.5 Short Data Service through a gateway.....	48
4.3.6 Group call from DM-MS via DM-REP/GATE	48
5 DM-MS layer 3 service description (for operation with a gateway)	50
5.1 Introduction	50
5.2 Services offered at the DMCC-SAP.....	50
5.3 Description of primitives at the DMCC-SAP.....	50
5.4 Description of parameters at the DMCC-SAP	51
5.5 States for DMCC-SAP	51
5.6 Services offered at the DMMM-SAP	51
5.7 Description of primitives at the DMMM-SAP.....	52
5.7.1 DMMM-REGISTRATION primitive	52
5.7.2 DMMM-REPORT primitive	53
5.8 Description of parameters at the DMMM-SAP	53
6 DM-MS layer 3 protocol (for operation with a gateway).....	53
6.1 Introduction	53
6.1.1 DMCC protocol states	54
6.1.2 DMMM protocol states.....	54
6.1.2.1 NOT-REGISTERED.....	54
6.1.2.2 WAIT-REGISTRATION	54
6.1.2.3 REGISTRATION-ACCEPTED.....	54
6.1.2.4 REGISTRATION-REJECTED	54
6.2 Circuit mode calls.....	54
6.2.1 Procedures for outgoing call set-up through a gateway	55
6.2.1.1 Outgoing call set-up.....	55
6.2.1.2 Temporary group address	57
6.2.1.3 Layer 3 addressing in DM-GSETUP PDU	57
6.2.1.3.1 Called party address	57
6.2.1.3.2 Area selection	57
6.2.1.3.3 Calls to external subscribers.....	57
6.2.1.3.4 Calling party address	57
6.2.2 Procedures for incoming call set-up.....	57
6.2.2.1 Incoming call set-up without presence check	57
6.2.2.2 Incoming call set-up with presence check	57
6.2.2.3 Transmitting Party Number Identification (TPNI) during incoming call set-up	58
6.2.3 Usage of DM-OCCUPIED PDU.....	58

	6.2.3.1	Sending of DM-OCCUPIED PDU by master DM-MS.....	58
	6.2.3.2	Late entry by slave DM-MS	58
6.2.4		Procedures during occupation	58
	6.2.4.1	Master DM-MS	58
	6.2.4.2	Slave DM-MS	59
	6.2.4.3	Transmitting Party Number Identification (TPNI) during occupation.....	60
	6.2.4.3.1	Master DM-MS	60
	6.2.4.3.2	Slave DM-MS	60
6.2.5		Procedures during reservation.....	61
	6.2.5.1	Master DM-MS	61
	6.2.5.2	Slave DM-MS	61
	6.2.5.3	Pre-emption of short data sent as a transaction within a circuit mode call	61
6.2.6		Procedures to set up a new call by pre-emption.....	62
6.3		Short Data Service (SDS) procedures	62
6.3.1		Sending short data.....	63
	6.3.1.1	Sending short data on a free channel	63
	6.3.1.1.1	Sending unacknowledged short data on a free channel.....	63
	6.3.1.1.2	Sending acknowledged short data on a free channel.....	63
	6.3.1.2	Sending short data by pre-emption	63
	6.3.1.3	Sending short data during circuit mode transmission	63
	6.3.1.4	Sending short data as a transaction within a circuit mode call.....	63
	6.3.1.4.1	Pre-emption to send short data as a transaction within a circuit mode call....	64
	6.3.1.4.2	Changeover to send short data as a transaction within a circuit mode call....	64
	6.3.1.4.3	Sending the short data as master of the circuit mode call.....	64
6.3.2		Receiving short data	64
	6.3.2.1	Receiving unacknowledged short data	64
	6.3.2.2	Receiving acknowledged short data	64
6.3.3		Additional addressing.....	65
	6.3.3.1	DM-MS sending short data	65
	6.3.3.2	DM-MS receiving short data.....	65
6.3.4		Extended error protection	65
6.4		Procedures for mobility management	65
	6.4.1	Solicited registration.....	65
	6.4.2	Unsolicited registration.....	66
	6.4.3	Cancellation of registration by gateway	66
	6.4.4	Other criteria for DMMM state change.....	66
	6.4.5	Action on entering state REGISTRATION-REJECTED.....	67
	6.4.6	Layer 3 addressing in DM-GREGISTER REQUEST PDU	67
6.5		Usage of DMA-UNITDATA primitive	67
	6.5.1	Sending a DMCC PDU	67
	6.5.2	Sending a DMMM PDU.....	67
	6.5.3	Protocol control function for delivery of received message	67
7		DM-MS layer 2 service description (for operation with a gateway).....	68
	7.1	Introduction.....	68
	7.2	Layer 2 architecture.....	68
	7.3	Service descriptions	68
	7.3.1	Services at the DMA-SAP	68
	7.3.1.1	Services provided to layer 3	68
	7.3.1.2	Service primitives at the DMA-SAP.....	68
	7.3.1.2.1	DMA-REPORT primitive.....	68
	7.3.1.2.2	DMA-UNITDATA primitive.....	68
	7.3.2	Services at the DMC-SAP.....	69
	7.3.2.1	Services provided to layer 3	69
	7.3.2.2	Service primitives at the DMC-SAP	69

		7.3.2.2.1	DMC-CONFIGURE primitive.....	69
		7.3.2.2.2	DMC-REPORT primitive	69
	7.3.3	Services at the DMD-SAP		69
		7.3.3.1	Services provided to the U-plane application.....	69
		7.3.3.2	Service primitives at the DMD-SAP	69
	7.4	Parameter listing		70
8	DM-MS layer 2 protocol (for operation with a gateway).....			71
	8.1	Introduction		71
		8.1.1	Functions of lower MAC	71
		8.1.2	Functions of upper MAC.....	71
	8.2	Interface between lower and upper MAC.....		71
		8.2.1	Logical channels defined at the DMV-SAP.....	71
		8.2.2	Service primitives at the DMV-SAP	71
		8.2.3	PDU mapping of the logical channels at the DMV-SAP	71
		8.2.4	Scrambling mechanism	72
		8.2.5	PDU error detection.....	72
		8.2.6	Modes of operation.....	72
	8.3	Basic capabilities of the physical layer		72
		8.3.1	DM-MS capabilities.....	72
			8.3.1.1 DM only and dual mode capable MS operation	72
			8.3.1.2 Dual watch capable MS operation	73
	8.4	Usage of DM channel with gateway.....		73
		8.4.1	Definition of DM channel	74
			8.4.1.1 DM channel arrangement	74
			8.4.1.1.1 DM channel arrangement for operation with a DM-GATE	74
			8.4.1.1.2 DM channel arrangement for operation with a type 1A DM-REP/GATE	74
			8.4.1.1.3 DM channel arrangement for operation with a type 1B DM-REP/GATE	74
		8.4.1.2	DM channel operation.....	74
	8.4.2	DM channel states		75
		8.4.2.1	DM channel state definitions.....	76
		8.4.2.2	DM-MS channel surveillance procedures	76
			8.4.2.2.1 Initial determination of DM channel state	76
			8.4.2.2.2 DM-MS channel surveillance in idle mode	76
			8.4.2.2.3 DM-MS channel surveillance at call set-up (circuit mode call or short data message)	76
			8.4.2.2.4 DM-MS channel surveillance for registration outside the registration phase	77
		8.4.2.3	Master DM-MS channel surveillance procedures during a call transaction.....	78
		8.4.2.4	Slave DM-MS channel surveillance procedures during a call.....	78
			8.4.2.4.1 Slave MS channel surveillance during call transaction	78
			8.4.2.4.2 Slave MS signal quality measurement during call transaction	78
			8.4.2.4.3 Slave MS channel surveillance during reservation	79
	8.4.3	DM-MAC states		79
		8.4.3.1	DM-MAC state definitions	79
		8.4.3.2	Criteria for changing DM-MAC state	80
	8.4.4	DM-MS channel monitoring procedures.....		81
		8.4.4.1	DM channel when setting up a circuit mode call through a gateway.....	81

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 396-5 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/240c913d-9cae-4294-a2ba-300-396-5-e1-2003>

8.4.4.2	DM channel when receiving a circuit mode call set-up from a gateway.....	81
8.4.4.3	DM channel in occupation during a circuit mode call.....	81
8.4.4.4	DM channel in reservation during a circuit mode call.....	82
8.4.4.5	DM channel in occupation during an SDS call.....	82
8.4.4.6	DM channel during pre-emption signalling.....	82
8.4.4.7	DM channel during registration phase.....	83
8.4.4.8	DM channel in occupation for an unsolicited registration....	83
8.4.5	Transmission of layer 3 messages by DM-MAC.....	83
8.4.5.1	Transmission of C-plane messages by DM-MAC.....	83
8.4.5.1.1	Transmitting DM-SETUP.....	83
8.4.5.1.2	Transmitting DM-SETUP PRES.....	83
8.4.5.1.3	Transmitting DM-CONNECT.....	83
8.4.5.1.4	Transmitting DM-DISCONNECT.....	84
8.4.5.1.5	Transmitting DM-CONNECT ACK.....	84
8.4.5.1.6	Transmitting DM-RELEASE.....	84
8.4.5.1.7	Transmitting DM-OCCUPIED.....	84
8.4.5.1.8	Transmitting DM-TX CEASED.....	84
8.4.5.1.9	Transmitting DM-TX REQUEST.....	84
8.4.5.1.10	Transmitting response to DM-TX REQUEST.....	84
8.4.5.1.11	Transmitting DM-PREEMPT.....	85
8.4.5.1.12	Transmitting response to DM-PREEMPT.....	85
8.4.5.1.13	Transmitting DM-SDS UDATA and DM-SDS DATA.....	85
8.4.5.1.14	Transmitting response to DM-SDS DATA.....	85
8.4.5.1.15	Transmitting DM-INFO.....	85
8.4.5.1.16	Transmitting DM-GSETUP.....	85
8.4.5.1.17	Transmitting DM-GTX REQUEST.....	86
8.4.5.1.18	Transmitting DM-GPREEMPT.....	86
8.4.5.1.19	Transmitting DM-GREGISTER REQUEST.....	87
8.4.5.1.20	Transmitting DM-GCANCEL ACK.....	87
8.4.5.2	Transmission of U-plane messages by DM-MAC.....	87
8.4.6	Transmission of layer 2 messages generated by DM-MAC.....	88
8.4.6.1	Transmitting DM-RESERVED.....	88
8.4.6.2	Transmitting DM-SDS OCCUPIED.....	88
8.4.6.3	Transmitting DM-TIMING REQUEST.....	88
8.4.6.4	Transmitting DM-TIMING ACK.....	88
8.4.7	General DM-MAC procedures.....	88
8.4.7.1	DM-MAC repeat transmissions.....	88
8.4.7.2	DM-MAC frame countdown procedure.....	88
8.4.7.3	Use of timers.....	88
8.4.7.4	Linearization.....	88
8.4.7.5	Fragmentation.....	89
8.4.7.6	Fill bit indication.....	89
8.4.7.7	Selection of pseudo address.....	89
8.4.7.8	Slot flag indication.....	90
8.4.7.9	Requests bitmap.....	90
8.4.7.10	Dual watch operation.....	90
8.4.7.11	Air interface encryption.....	90
8.4.7.12	Channel A or B operation.....	90
8.4.7.13	Sending short data as a transaction within a circuit mode call.....	90
8.4.7.14	SDS and registration transaction time remaining.....	90
8.4.7.14.1	SDS time remaining.....	90
8.4.7.14.2	Registration transaction time remaining.....	90
8.4.7.15	Timing change procedure.....	90
8.4.7.16	Timing change at changeover or pre-emption.....	91
8.4.7.17	Modification of slot/frame numbering by gateway.....	91

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/240975d9-9c4e-4294-a2ba-cb59c2f2a144/sist-ets-300-396-5-e1-2000>

	8.4.7.18	Modification of channel timing by gateway	91
8.5	MAC procedures for transfer of signalling messages		91
	8.5.1	Formation of MAC PDU	91
	8.5.2	Addressing	92
	8.5.2.1	Transmission of message	92
	8.5.2.1.1	Addressing in synchronization burst carrying gateway-specific message	92
	8.5.2.1.2	Addressing in synchronization burst carrying non-gateway-specific message	93
	8.5.2.1.3	Lifetime of pseudo SSI	93
	8.5.2.1.4	Additional elements in synchronization burst	94
	8.5.2.1.5	Addressing in normal burst	95
	8.5.2.2	Reception of message	95
	8.5.2.3	Usage of MNI	96
8.5.3	Use of air interface encryption		96
8.5.4	Fragmentation and reconstruction		96
	8.5.4.1	Fragmentation by a DM-MS	96
	8.5.4.2	Reconstruction by a DM-MS	97
8.5.5	Fill bit addition and deletion		98
8.5.6	Transmission and reception of messages by layer 2 unacknowledged service		98
	8.5.6.1	Transmission of message	100
	8.5.6.2	Reception of message	100
8.5.7	Random access protocol during occupation and reservation periods		102
	8.5.7.1	Introduction	102
	8.5.7.2	Procedures for master DM-MS	103
	8.5.7.2.1	Indicating frames available for requests	103
	8.5.7.2.2	Monitoring frames available for requests	103
	8.5.7.2.3	Response to pre-emption request	104
	8.5.7.2.4	Response to timing change request	104
	8.5.7.2.5	Response to DM-GRELEASE message	104
	8.5.7.3	Procedures for requesting DM-MS	104
8.5.8	Procedures for sending messages during registration phase		106
	8.5.8.1	Procedures for registering DM-MS during registration phase	106
	8.5.8.1.1	Preparing for registration access	106
	8.5.8.1.2	First transmission of solicited registration request	106
	8.5.8.1.3	Valid access slots	106
	8.5.8.1.4	Waiting for response	106
	8.5.8.1.5	Subsequent transmission of request	107
	8.5.8.1.6	Abandoning registration access attempt	107
	8.5.8.2	Procedures for pre-empting DM-MS during registration phase	107
	8.5.8.2.1	Preparing for random access	107
	8.5.8.2.2	First transmission of pre-emption request	107
	8.5.8.2.3	Valid slots for pre-emption	107
	8.5.8.2.4	Waiting for response	107
	8.5.8.2.5	Subsequent transmission of request	108
	8.5.8.2.6	Abandoning random access attempt	108
8.6	MAC procedures in traffic mode		108
	8.6.1	Introduction	108
	8.6.2	Criteria for transmission and reception of traffic	109
	8.6.3	Change of U-plane mode	109
	8.6.3.1	Call set-up by DM-MS	109
	8.6.3.2	Incoming call set-up	109

iTeh STANDARD PREVIEW
(standards.itteh.ai)

SIST ETS 300 396-5 E1:2003
<https://standards.itteh.ai/catalog/standards/sist/240c913d-94ac-4295-a40c-cb59c295a414/sist-ets-300-396-5-e1-2003>

	8.6.3.2.1	Incoming call set-up without presence check	109
	8.6.3.2.2	Incoming call set-up with presence check	110
	8.6.3.3	Late entry	110
	8.6.3.4	End of traffic transmission.....	110
	8.6.3.4.1	Master DM-MS	110
	8.6.3.4.2	Slave DM-MS	110
8.6.4		Exchange of information at the DMD-SAP	110
8.6.5		Stealing from circuit mode capacity	110
9		Gateway layer 3 call control procedures	110
9.1		Introduction.....	110
9.2		Gateway call control states.....	111
9.2.1		Gateway V+D call control states	111
	9.2.1.1	IDLE	111
	9.2.1.2	MO-CALL-SETUP	111
	9.2.1.3	MT-CALL-SETUP.....	111
	9.2.1.4	CALL ACTIVE	111
	9.2.1.5	CALL DISCONNECT	111
	9.2.1.6	WAIT	111
9.2.2		Gateway DM call control states	111
	9.2.2.1	IDLE	111
	9.2.2.2	CALL SETUP NORMAL ORIGINATING.....	112
	9.2.2.3	CALL SETUP PRES_CHECK ORIGINATING	112
	9.2.2.4	CALL SETUP TERMINATING	112
	9.2.2.5	PRE-EMPTION	112
	9.2.2.6	CALL ACTIVE TX OCCUPATION	112
	9.2.2.7	CALL ACTIVE TX RESERVATION.....	112
	9.2.2.8	CALL ACTIVE RX OCCUPATION	112
	9.2.2.9	WAIT RSP OCCUPATION.....	112
	9.2.2.10	ACK'D SHORT DATA INITIATED.....	112
	9.2.2.11	UNACK'D SHORT DATA INITIATED.....	112
9.3		Layer 3 circuit mode call control procedures.....	112
9.3.1		Incoming call set-up from V+D	113
	9.3.1.1	Incoming individual call set-up from V+D.....	113
	9.3.1.2	Incoming group call set-up from V+D.....	116
9.3.2		Outgoing call set-up to V+D	117
	9.3.2.1	Outgoing call to V+D set-up procedures	117
	9.3.2.2	Colliding call set-up signalling over the V+D air interface (Um)	119
	9.3.2.3	Unsuccessful call set-up to V+D	120
9.3.3		Call maintenance procedures	120
	9.3.3.1	End of transmission.....	120
	9.3.3.1.1	Reception of DM-TX CEASED PDU from current master DM-MS.....	120
	9.3.3.1.2	Reception of D-TX CEASED PDU from V+D	121
	9.3.3.1.3	Gateway initiated DM-TX CEASED....	121
	9.3.3.2	Reception of D-TX INTERRUPT from V+D	121
	9.3.3.3	Incoming V+D transmission during DM channel reservation	122
	9.3.3.4	Reception of a DM request to transmit during DM channel reservation	122
	9.3.3.4.1	Response to valid DM-GTX REQUEST (or DM-GPREEMPT) PDU.....	124
	9.3.3.4.2	Response to valid DM-TX REQUEST (or DM-PREEMPT) PDU	124
	9.3.3.5	V+D permission to transmit withdrawn during a call	125
	9.3.3.6	V+D permission to continue with withdrawn call	125
	9.3.3.7	SwMI initiated call continuation	126
	9.3.3.8	Call modification.....	126
	9.3.3.8.1	DM-MS initiated call modification	126

	9.3.3.8.2	SwMI initiated call modification	126
	9.3.3.9	Call disconnection	126
	9.3.3.9.1	Reception of DM-RELEASE from current master DM-MS (or call lost)	126
	9.3.3.9.2	Call disconnection by SwMI	127
	9.3.3.9.3	Expiry of call length timer	127
	9.3.3.10	V+D call restoration	128
	9.3.3.11	Unsolicited D-TX GRANTED PDU	128
	9.3.3.12	Extension and end of reservation period	128
9.3.4	Gateway pre-emption procedures		129
	9.3.4.1	DM-MS pre-emption of a gateway operating as master	129
	9.3.4.1.1	New call pre-emption during call set-up	129
	9.3.4.1.2	New call pre-emption during DM channel occupation	129
	9.3.4.1.3	New call pre-emption during DM channel reservation	130
	9.3.4.1.4	DM-MS pre-emption during DM channel occupation to continue existing call	130
	9.3.4.1.5	DM-MS pre-emption during DM channel occupation to send short data within ongoing call	132
	9.3.4.2	Pre-emption procedures during gateway slave operation .	133
	9.3.4.2.1	Transmission interrupt from V+D	133
	9.3.4.2.2	Pre-emption initiated by gateway during an ongoing call	134
	9.3.4.2.3	New call pre-emption by gateway	135
	9.3.4.2.4	Pre-emption by another DM-MS	135
9.4	Layer 3 short data service procedures		136
	9.4.1	Incoming SDS message from V+D	136
	9.4.1.1	Transmission of short data message from V+D using DM unacknowledged service	136
	9.4.1.2	Transmission of short data message from V+D using DM acknowledged service	136
	9.4.1.3	Pre-emption of DM unacknowledged or acknowledged SDS transaction	137
	9.4.1.4	Transmission of short data message from V+D during DM channel occupation	138
	9.4.1.5	Transmission of short data message from V+D during DM channel reservation	138
	9.4.2	Outgoing DM SDS message to V+D	138
	9.4.2.1	Reception of outgoing SDS message on DM channel	138
	9.4.2.1.1	Reception of outgoing unacknowledged SDS message on DM channel	139
	9.4.2.1.2	Reception of outgoing acknowledged SDS message on DM channel	139
	9.4.2.2	Reception of DM short data sent within ongoing call	140
9.5	Addressing methods on V+D air interface		140
	9.5.1	Receiving group call from V+D	140
	9.5.2	Receiving individual call from V+D	141
	9.5.3	Call set-up to V+D	141
9.6	Information element mapping between V+D and DM PDUs		141
	9.6.1	V+D communication type - DMO call type flag mapping	141
	9.6.2	V+D call priority - DMO priority mapping	142
	9.6.3	V+D short data type identifier - DMO short data type identifier mapping	142
	9.6.4	V+D TX demand priority - DMO priority level mapping	142
10	Gateway layer 3 mobility management procedures		142
	10.1	Introduction	142
	10.2	Gateway MM states	142
	10.2.1	MM protocol states - V+D	142

10.2.2	MM protocol states - DM.....	143
10.2.2.1	REGISTRATIONS SOLICITED.....	143
10.2.2.2	REGISTRATIONS NOT PERMITTED.....	143
10.2.2.3	REGISTRATIONS PERMITTED.....	143
10.3	Gateway MM procedures.....	143
10.3.1	Gateway registration to SwMI.....	143
10.3.2	Gateway MM procedures on DM.....	143
10.3.3	Receiving DM registration requests.....	144
10.3.3.1	Solicited registration requests.....	144
10.3.3.2	Unsolicited registration requests.....	145
10.3.4	Registration cancellation.....	145
10.3.5	Procedures for U-MM STATUS and D-MM STATUS.....	146
10.3.5.1	Procedures for sending U-MM STATUS.....	146
10.3.5.2	Procedures for receiving D-MM STATUS.....	146
11	Gateway U-plane converter.....	146
11.1	Introduction.....	146
11.2	Start of call transaction.....	147
11.2.1	Call transaction from DM to V+D.....	147
11.2.2	Call transaction from V+D to DM.....	147
11.3	U-plane conversion during call transaction.....	148
11.3.1	U-plane conversion from DM to V+D.....	148
11.3.2	U-plane conversion from V+D to DM.....	149
11.4	Stopping transmission/reception.....	149
11.4.1	Call transaction from DM to V+D.....	149
11.4.2	Call transaction from V+D to DM.....	150
12	Gateway DM layer 2 service description.....	150
12.1	Introduction.....	150
12.2	Gateway DM layer 2 architecture.....	150
12.2.1	Lower layer management in layer 2.....	150
12.3	Service descriptions.....	151
12.3.1	Services at the GMA-SAP.....	151
12.3.1.1	Services provided to layer 3.....	151
12.3.1.1.1	Protocol control function for delivery of received message.....	151
12.3.1.2	Service primitives at the GMA-SAP.....	151
12.3.1.2.1	GMA-REPORT primitive.....	151
12.3.1.2.2	GMA-UNITDATA primitive.....	151
12.3.2	Services at the GMC-SAP.....	152
12.3.2.1	Services provided to layer 3.....	152
12.3.2.2	Service primitives at the GMC-SAP.....	152
12.3.2.2.1	GMC-CONFIGURE primitive.....	152
12.3.2.2.2	GMC-REPORT primitive.....	152
12.3.3	Services at the GMD-SAP.....	152
12.3.3.1	Services provided to the U-plane converter.....	152
12.3.3.2	Service primitives at the GMD-SAP.....	152
12.3.3.2.1	GMD-REPORT primitive.....	152
12.3.3.2.2	GMD-UNITDATA primitive.....	153
12.4	Parameter listing.....	153
13	Gateway DM layer 2 protocol.....	154
13.1	Introduction.....	154
13.1.1	Functions of lower MAC.....	154
13.1.2	Functions of upper MAC.....	155
13.2	Interface between lower and upper MAC.....	155
13.3	Basic capabilities of the gateway physical layer.....	156
13.3.1	DM-GATE capabilities.....	156
13.3.2	Type 1A DM-REP/GATE capabilities.....	157
13.3.2.1	Type 1A DM-REP/GATE: DM RF carrier in same sub-band as V+D downlink carrier.....	157
13.3.2.2	Type 1A DM-REP/GATE: DM RF carrier in same sub-band as V+D uplink carrier.....	157

	13.3.2.3	Type 1A DM-REP/GATE: DM RF carrier not in either V+D sub-band.....	158
	13.3.3	Type 1B DM-REP/GATE capabilities	158
13.4	Usage of DM channel		159
	13.4.1	Gateway operation.....	159
	13.4.1.1	DM-GATE operation	159
	13.4.1.2	DM-REP/GATE operation.....	160
	13.4.1.2.1	Type 1A DM-REP/GATE: DM RF carrier in same sub-band as V+D downlink carrier.....	161
	13.4.1.2.2	Type 1A DM-REP/GATE: DM RF carrier in same sub-band as V+D uplink carrier	161
	13.4.1.2.3	Type 1A DM-REP/GATE (if DM RF carrier not in V+D sub-band) or type 1B DM-REP/GATE	162
	13.4.2	Gateway states.....	162
	13.4.2.1	Gateway state definitions.....	163
	13.4.2.2	Gateway channel surveillance procedures	164
	13.4.2.2.1	Channel surveillance when idle on a free channel (i.e. in state 1)	164
	13.4.2.2.2	Channel surveillance when idle on a busy channel (i.e. in state 2, 3 or 4)....	164
	13.4.2.2.3	Channel surveillance when idle at DM-MS call set-up	165
	13.4.2.2.4	Channel surveillance before call set-up by gateway (circuit mode call or short data).....	166
	13.4.2.2.5	Channel surveillance before registration phase	167
	13.4.2.2.6	Channel surveillance before registration cancellation	167
	13.4.2.3	Channel surveillance when active during a call	167
13.4.3	Criteria for changing gateway state		168
13.4.4	Gateway channel monitoring procedures		169
	13.4.4.1	DM channel during reception of fragmented DM-GSETUP message	169
	13.4.4.2	DM channel during call set-up with presence check.....	169
	13.4.4.3	DM channel in reservation during circuit mode call set-up	169
	13.4.4.4	DM channel following circuit mode connection by gateway.....	170
	13.4.4.5	Gateway as master in circuit mode occupation	170
	13.4.4.6	Gateway as slave in circuit mode occupation.....	170
	13.4.4.7	DM channel in reservation during a circuit mode call	170
	13.4.4.8	Gateway as master in SDS occupation	170
	13.4.4.9	Gateway as slave in SDS occupation.....	171
	13.4.4.10	DM channel following pre-emption or changeover acceptance by gateway	171
	13.4.4.11	DM channel following pre-emption acceptance by a master DM-MS.....	172
	13.4.4.12	DM channel following pre-emption request generated by gateway.....	172
	13.4.4.13	Gateway as master in registration phase	172
	13.4.4.14	Gateway as master during registration cancellation	173
13.4.5	Transmission of layer 3 messages by layer 2		173
	13.4.5.1	Transmission of C-plane messages by layer 2.....	173
	13.4.5.1.1	Transmitting DM-SETUP and DM-SETUP PRES	173
	13.4.5.1.2	Transmitting DM-CONNECT ACK.....	174
	13.4.5.1.3	Transmitting DM-RELEASE.....	174
	13.4.5.1.4	Transmitting DM-OCCUPIED	174
	13.4.5.1.5	Transmitting DM-TX CEASED.....	175
	13.4.5.1.6	Transmitting response to DM-TX REQUEST	175

iTeh STANDARD PREVIEW
(standard.itteh.ai)

13.4.3

13.4.4

13.4.4.1

13.4.4.2

13.4.4.3

13.4.4.4

13.4.4.5

13.4.4.6

13.4.4.7

13.4.4.8

13.4.4.9

13.4.4.10

13.4.4.11

13.4.4.12

13.4.4.13

13.4.4.14

13.4.5

13.4.5.1

13.4.5.1.1

13.4.5.1.2

13.4.5.1.3

13.4.5.1.4

13.4.5.1.5

13.4.5.1.6

	13.4.5.1.7	Transmitting DM-PREEMPT	175
	13.4.5.1.8	Transmitting response to DM-PREEMPT	176
	13.4.5.1.9	Transmitting DM-SDS UDATA and DM-SDS DATA.....	177
	13.4.5.1.10	Transmitting response to DM-SDS DATA.....	177
	13.4.5.1.11	Transmitting DM-INFO	178
	13.4.5.1.12	Transmitting response to DM-GSETUP.....	178
	13.4.5.1.13	Transmitting response to DM-GTX REQUEST.....	179
	13.4.5.1.14	Transmitting response to DM-GPREEMPT	179
	13.4.5.1.15	Transmitting DM-GRELEASE	180
	13.4.5.1.16	Transmitting response to registration request	180
	13.4.5.1.17	Transmitting registration cancellation.	180
	13.4.5.2	Transmission of U-plane messages by layer 2	180
13.4.6	13.4.6	Transmission of layer 2 messages	181
	13.4.6.1	Layer 2 messages sent in DMAC-SYNC PDU	181
	13.4.6.1.1	Transmitting DM-RESERVED	181
	13.4.6.1.2	Transmitting DM-SDS OCCUPIED	182
	13.4.6.1.3	Transmitting DM-TIMING ACK.....	182
	13.4.6.2	Gateway presence signal	182
	13.4.6.2.1	Channel free.....	182
	13.4.6.2.2	Channel in occupation.....	183
	13.4.6.2.3	Channel in reservation	183
	13.4.6.2.4	Channel in registration phase.....	183
13.4.7	13.4.7	General layer 2 procedures	184
	13.4.7.1	Repeat transmissions	184
	13.4.7.2	Frame countdown procedure	184
	13.4.7.3	Use of timers	184
	13.4.7.4	Linearization	184
	13.4.7.5	Fragmentation	185
	13.4.7.6	Fill bit indication.....	185
	13.4.7.7	Use of pseudo address	185
	13.4.7.8	Slot flag indication	185
	13.4.7.9	Requests bitmap	185
	13.4.7.10	Receiving the V+D channel.....	185
	13.4.7.11	Air interface encryption.....	186
	13.4.7.12	Channel A or B operation.....	186
	13.4.7.13	Sending short data as a transaction within a circuit mode call.....	186
	13.4.7.14	SDS and registration transaction time remaining.....	186
	13.4.7.14.1	SDS time remaining	186
	13.4.7.14.2	Registration transaction time remaining.....	186
	13.4.7.15	Modification of slot/frame numbering by gateway	186
	13.4.7.16	Modification of channel timing by gateway.....	187
13.4.8	13.4.8	DM-REP/GATE procedures for DM re-transmission of DM signalling messages	188
	13.4.8.1	DM re-transmission of master DM-MS signalling messages received in a DSB	188
	13.4.8.1.1	General procedures.....	188
	13.4.8.1.2	Re-transmission of DM-SETUP message.....	189
	13.4.8.1.3	Re-transmission of DM-SDS DATA or DM-SDS UDATA message	190
	13.4.8.1.4	Re-transmission of unsolicited DM-GREGISTER REQUEST	190

	13.4.8.1.5	Re-transmission of other messages in a DSB when not using multi-slot regeneration	191
	13.4.8.1.6	Re-transmission of other messages in a DSB during traffic transmission with multi-slot regeneration	191
	13.4.8.2	DM re-transmission of master DM-MS signalling messages received in a DNB	191
	13.4.8.2.1	Call transaction without multi-slot regeneration	191
	13.4.8.2.2	Call transaction with multi-slot regeneration	192
	13.4.8.3	Regeneration of additional repetitions on the slave link	192
	13.4.8.4	DM re-transmission of messages received from a slave DM-MS	193
13.5	Layer 2 procedures for transfer of signalling messages		193
	13.5.1	Formation of MAC PDU	193
	13.5.2	Addressing	194
	13.5.2.1	Transmission of message	194
	13.5.2.1.1	Addressing in synchronization burst carrying gateway-specific message	194
	13.5.2.1.2	Addressing in synchronization burst carrying non-gateway-specific message	194
	13.5.2.1.3	Gateway pseudo SSI	195
	13.5.2.1.4	Additional elements in synchronization burst	195
	13.5.2.1.5	Addressing in normal burst	195
	13.5.2.2	Reception of message	196
	13.5.2.3	Usage of MNI	196
13.5.3	Use of air interface encryption		197
13.5.4	Fragmentation and reconstruction		197
	13.5.4.1	Fragmentation by a gateway	197
	13.5.4.2	Reconstruction by a gateway	197
	13.5.4.2.1	Reconstruction by a DM-GATE	197
	13.5.4.2.2	Reconstruction of master link message by DM-REP/GATE	198
	13.5.4.2.3	Reconstruction of slave link message by DM-REP/GATE	198
13.5.5	Fill bit addition and deletion		198
13.5.6	Transmission and reception of messages by layer 2 unacknowledged service		198
	13.5.6.1	Transmission of message	199
	13.5.6.2	Reception of message	199
13.5.7	Random access protocol during occupation and reservation periods		201
	13.5.7.1	Introduction	201
	13.5.7.2	Procedures for master gateway	202
	13.5.7.2.1	Indicating frames available for requests	202
	13.5.7.2.2	Monitoring frames available for requests	202
	13.5.7.2.3	Response to pre-emption or changeover request	203
	13.5.7.3	Procedures for requesting slave gateway	204
	13.5.7.3.1	Transmission of message by requesting slave gateway	204
	13.5.7.3.2	Looking for response	205
	13.5.7.3.3	Abandoning transmission attempt	205
13.5.8	Procedures in registration phase		205
	13.5.8.1	Start of registration phase	205
	13.5.8.2	Receiving registration requests	206
	13.5.8.3	Sending response	206
	13.5.8.4	Maintenance of registration phase	206

iTeh STANDARD PREVIEW
(standards.itteh.ai)

<https://standards.itteh.ai/catalog/standards/sist/300-396-5-e1-2003/cb59c295a414/sist-300-396-5-e1-2003>