

SLOVENSKI STANDARD SIST ETS 300 748 E1:2003

01-december-2003

Digitalna videoradiodifuzija (DVB) – Struktura okvirov, kodiranje kanalov in modulacija za MVDS na 10 GHz in nad 10 GHz

Digital Video Broadcasting (DVB); Framing structure, channel coding and modulation for MVDS at 10 GHz and above

iTeh STANDARD PREVIEW (standards.iteh.ai)

Ta slovenski standard je istoveten 25.00.748 Edition 1.003 je istoveten 25.00 748 Edition 1.003 je istoveten 25.00 748 Edition 1.003 je istoveten 25.005 je istoveten

3fb879be33de/sist-ets-300-748-e1-2003

en

ICS:

33.170 Televizijska in radijska

difuzija

Television and radio

broadcasting

SIST ETS 300 748 E1:2003

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ETS 300 748 E1:2003

https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-3fb879be33de/sist-ets-300-748-e1-2003



EUROPEAN TELECOMMUNICATION STANDARD

ETS 300 748

October 1996

Source: EBU/CENELEC/ETSI JTC Reference: DE/JTC-00DVB-20

ICS: 33.060.20

Key words: DVB, digital, video, broadcasting, MPEG, TV, multipoint, radio

European Broadcasting Union

ITeh STANDARD PREVIEW

(stan la d. Reh.ai)

SIST Bigital Video 2003

https://standards.iteh.ai/catalog/standards/ssst/0ac86e4c-c150-4503-bfd0-

Digital Video Broadcasting (DVB);
Framing structure, channel coding and modulation for MVDS at 10 GHz and above

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - Internet: secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

[©] European Telecommunications Standards Institute 1996.

[©] European Broadcasting Union 1996.

Page 2

ETS 300 748: October 1996

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ETS 300 748 E1:2003

https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-3fb879be33de/sist-ets-300-748-e1-2003

Whilst every care has been taken in the preparation and publication of this document, errors in content, typographical or otherwise, may occur. If you have comments concerning its accuracy, please write to "ETSI Editing and Committee Support Dept." at the address shown on the title page.

Contents

Forev	word			5	
1	Scope			7	
2	Normative references				
3	Symbols and abbreviations				
	3.1	Symbols			
	3.2	Abbreviations			
4	Transmission system				
	4.1		efinition		
	4.2	Adaptation	n to MVDS transmitter characteristics	10	
	4.3	•	J		
			, oding		
		4.4.1	Transport multiplex adaptation and randomization for energy dispersal		
		4.4.2	Outer coding (Reed-Solomon), interleaving and framing		
		4.4.3	Inner coding (convolutional)		
	4.5	Baseband	shaping and modulation		
5	Error per	formance r	equirements	15	
•	o. po.	iTe	h STANDARD PREVIEW Signal spectrum at the modulator output		
Anne	x A (norm	ative).	Signal spectrum at the modulator output	16	
,	x / (1101111	a	(standards.iteh.ai)		
Anne	x B (inforn	native). (Conceptual System description	18	
	•	,	·		
Anne	x C (inforr	native): [Examples of bit rates versus MVDS transmitter bandwidth	20	
	x D (inforr	mative):	3fb879be33de/sist-ets-300-748-s1-2003 Examples of possible use of the System	21	
	`				
Anne	x E (inforn	native): E	Bibliography	22	
Histo	rv			23	

Page 4

ETS 300 748: October 1996

Blank page

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ETS 300 748 E1:2003

https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-3fb879be33de/sist-ets-300-748-e1-2003

Page 5 ETS 300 748: October 1996

Foreword

This European Telecommunication Standard (ETS) has been produced by the Joint Technical Committee (JTC) of the European Broadcasting Union (EBU), Comité Européen de Normalisation ELECtrotechnique (CENELEC) and the European Telecommunications Standards Institute (ETSI).

NOTE:

The EBU/ETSI JTC was established in 1990 to co-ordinate the drafting of ETSs in the specific field of broadcasting and related fields. Since 1995 the JTC became a tripartite body by including in the Memorandum of Understanding also CENELEC, which is responsible for the standardization of radio and television receivers. The EBU is a professional association of broadcasting organizations whose work includes the co-ordination of its Members' activities in the technical, legal, programme-making and programme-exchange domains. The EBU has Active Members in about 60 countries in the European Broadcasting Area; its headquarters is in Geneva *.

* European Broadcasting Union Case Postale 67 CH-1218 GRAND SACONNEX (Geneva) Switzerland

Tel: +41 22 717 21 11 Fax: +41 22 717 24 81

Digital Video Broadcasting (DVB) Project

Founded in September 1993, the DVB Project is a market-led consortium of public and private sector organizations in the television industry. Its aim is to establish the framework for the introduction of MPEG-2 based digital television services. Now comprising over 200 organizations from more than 25 countries around the world, DVB fosters market-led systems, which meet the real needs, and economic circumstances, of the consumer electronics and the broadcast industry.

SIST ETS 300 748 E1:2003

https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-

3fb879be33d Transposition dates 3				
Date of adoption of this ETS:	18 October 1996			
Date of latest announcement of this ETS (doa):	31 January 1997			
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 July 1997			
Date of withdrawal of any conflicting National Standard (dow):	31 July 1997			

Page 6

ETS 300 748: October 1996

Blank page

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ETS 300 748 E1:2003

https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-3fb879be33de/sist-ets-300-748-e1-2003

Page 7 ETS 300 748: October 1996

1 Scope

This European Telecommunication Standard (ETS) describes the modulation and channel coding system (denoted the "System" for the purposes of this ETS) for the distribution of digital multi-programme Television (TV) / High Definition Television (HDTV) by Multipoint Video Distribution Systems (MVDS) in the 40 GHz band. The System described in this ETS is based on that described in ETS 300 421 for 11/12 GHz satellite services. It allows the same consumer Integrated Receiver Decoder (IRD) to be used for either service, when used with a Low Noise Block (LNB) down-converter for the appropriate frequency band.

The frequency band 40,5 to 42,5 GHz has been harmonized within the European Conference of Post and Telecommunications Administrations (CEPT) under Recommendation T/R 52-01. The System however, is applicable to other frequency bands above 10 GHz.

The System uses Quaternary Phase Shift Keying (QPSK) modulation and concatenated error protection strategy based on a convolutional code and shortened Reed-Solomon (RS) code.

The System is suitable for use on different MVDS transmitter bandwidths.

Compatibility with Moving Pictures Experts Group - 2 (MPEG-2) coded TV services (see ISO/IEC 13818-1 [1]), with a transmission structure synchronous with the packet multiplex, is provided. Exploitation of the multiplex flexibility allows the use of the transmission capacity for a variety of TV service configurations, including sound and data services. All service components are Time Division Multiplexed (TDM) on a single digital carrier.

This ETS:

- gives a general description of the System for MVDS digital TV transmission;
- specifies the digitally modulated signal in order to allow compatibility between pieces of equipment developed by different manufacturers. This is achieved by describing in detail the signal processing principles at the modulator side, while the processing at the receive side is left open to different implementation solutions. However, it is necessary in this ETS to refer to certain aspects of reception;

 SIST ETS 300 748 E1:2003

 https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-
- identifies the global performance requirements and features of the System, in order to meet the service quality targets.

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

[1]	ISO/IEC 13818-1 (November 1994): "Coding of moving pictures and associated audio".
[2]	Forney, G.D. IEEE Trans. Comm. Tech., COM-19, pp. 772-781, (October 1971):

"Burst-correcting codes for the classic bursty channel".

[3] Intelsat Earth Station Standards (IESS) No. 308, revision 6 (26 October 1990): "Performance characteristics for Intermediate Data Rate (IDR) digital carriers".

Page 8

ETS 300 748: October 1996

3 Symbols and abbreviations

3.1 **Symbols**

For the purposes of this ETS, the following symbols apply:

Roll-off factor C/N Signal-to-Noise ratio

Convolutional code free distance d_{free}

 E_b/\tilde{N}_0 Ratio between the energy per useful bit and twice the noise power spectral

density

Nyauist frequency

 f_N G_1,G_2 Convolutional code generators RS code generator polynomial g(x)Interleaving depth (bytes)

I, Q In-phase, Quadrature phase components of the modulated signal

Branch index of the interleaver K Convolutional code constraint length

M Convolutional interleaver branch depth for j = 1, M = N/I

Ν Error protected frame length (bytes) RS field generator polynomial p(x)

In-band ripple (dB)

 $r_{\rm m}$ $R_{\rm s}$ Symbol rate corresponding to the bilateral Nyquist bandwidth of the modulated

 R_u Useful bit rate after MPEG-2 [1] transport multiplexer

Bit rate after RS outer coder

R_u T Number of bytes which can be corrected in RS error protected packet

Symbol period 7 Symbol period

Di-bit stream after rate 1/2 convolutional coding

3.2 **Abbreviations**

For the purposes of this ETS, the following aboreviations apply E1 2003

https://standards.iteh.ai/catalog/standards/sist/0ac86e4c-c150-4503-bfd0-

(standards.iteh.ai)

Additive White Gaussian Noisets-300-748-e1-2003 **AWGN**

BB BaseBand **BER** Bit Error Ratio

BSS Broadcast Satellite Service

BW BandWidth

International Telegraph and Telephone Consultative Committee (now ITU-T) CCITT

DTH Direct To Home

FDM Frequency Division Multiplex Forward Error Correction FEC **FIFO** First-In, First-Out shift register Finite Impulse Response FIR **FSS** Fixed Satellite Service HEX Hexadecimal notation **HDTV** High Definition TeleVision Intermediate Frequency IF **IMUX** Input Multiplexer - Filter IRD Integrated Receiver Decoder **MPEG** Moving Pictures Experts Group

MSB Most Significant Bit

MUX Multiplex

MVDS Multipoint Video Distribution System

OBO **Output Back Off** OCT Octal notation

OMUX Output Multiplexer - Filter

Puncturing

PDH Plesiochronous Digital Hierarchy

PSK Phase Shift Keying

PRBS Pseudo Random Binary Sequence

QEF Quasi-Error-Free

Page 9 ETS 300 748: October 1996

QPSK Quaternary PSK
R Randomized sequence
RF Radio Frequency
RS Reed-Solomon

SMATV Satellite Master Antenna Television

TBD To Be Defined

TDM Time Division Multiplex

TV Television

TWTA Travelling Wave Tube Amplifier

4 Transmission system

4.1 System definition

The System is defined as the functional block of equipment performing the adaptation of the baseband TV signals from the output of the MPEG-2 transport multiplexer (see ISO/IEC 13818-1 [1]), to the MVDS channel characteristics. The following processes shall be applied to the data stream (see figure 1):

- transport multiplex adaptation and randomization for energy dispersal;
- outer coding (i.e. Reed-Solomon);
- convolutional interleaving;
- inner coding (i.e. punctured convolutional code);
- baseband shaping for modulation;

iTeh STANDARD PREVIEW

- modulation.

(standards.iteh.ai)

The System functional description is given in annex B.

MVDS services at millimetric frequency bands are particularly affected by power limitations, therefore ruggedness against noise and interference shall be the main design objective, rather than spectrum efficiency. To achieve a very high power efficiency without excessively penalizing the spectrum efficiency, the System shall use QPSK modulation and the concatenation of convolutional and RS codes. The convolutional code is able to be configured flexibly, allowing the optimization of the system performance for a given MVDS transmitter bandwidth (see annex C).

The system is suitable for single carrier per MVDS transmitter Time Division Multiplex (TDM) type applications. It can also be used for multi-carrier Frequency Division Multiplex (FDM) type applications.

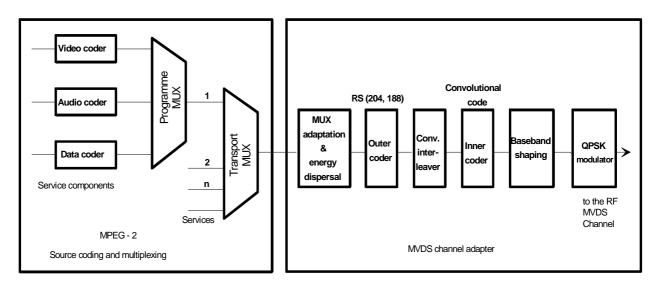


Figure 1: Functional block diagram of the System