



Designation: D6535 – 05

## Standard Test Method for Determining the Dip Tube Length of a Mechanical Pump Dispenser<sup>1</sup>

This standard is issued under the fixed designation D6535; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 This test method covers the determination technique for a dip tube of a mechanical pump dispenser.

1.2 The values stated in both inch pound and SI units are to be regarded separately as the standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

### 2. Significance and Use

2.1 This test method is to be used to determine the length of a dip tube of a mechanical pump dispenser that extends to the bottom-corner of a container.

2.2 This test method is to be used to determine the length of a dip tube of a mechanical pump dispenser that extends to the bottom-center of a container.

### 3. Apparatus

3.1 *Thin Metal Ruler*, with minimum gradients of one millimeter and/or  $\frac{1}{16}$  in. along with a zero index at the end of the ruler.

3.2 *Calipers*.

### 4. Procedure

#### TEST METHOD “A”—DIP TUBE LENGTH DETERMINATION TO THE BOTTOM-CORNER OF THE CONTAINER

NOTE 1—This test method is used when the dip tube of a mechanical pump dispenser must extend to the bottom-corner of a container.

4.1 Place the zero-index end of the ruler into the container as shown in Fig. 1.

4.2 Turn the ruler so that the side of the ruler reaches as far into the bottom-corner of the container as possible.

<sup>1</sup> This test method is under the jurisdiction of ASTM Committee D10 on Packaging and is the direct responsibility of Subcommittee D10.33 on Mechanical Dispensers.

Current edition approved Oct. 1, 2005. Published November 2005. Originally approved in 2000. Last previous edition approved in 2000 as D6535 – 00. DOI: 10.1520/D6535-05.

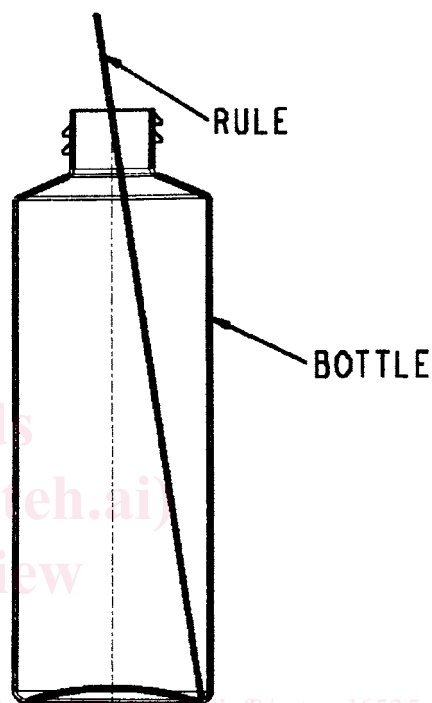


FIG. 1 To Bottom-Corner

NOTE 2—If the cross-sectional area of the container is not round, position the ruler into the farthest bottom-corner of the container.

4.3 Adjust the ruler so that it is positioned through the center axis of the container opening.

4.4 Measure the dip tube length to within 1 mm or  $\frac{1}{16}$  in. If the measurement value is between the whole millimetre or  $\frac{1}{16}$ <sup>th</sup> gradient, use the larger value (that is, if measurement is 118.5 mm, use 119 mm; or if measurement is  $4\text{-}\frac{2}{32}$  in., use  $4\text{-}\frac{1}{16}$  in.).

4.5 If the dip tube measurement is in millimetres, subtract 1 mm from the measured value. If the dip tube measurement is in inches, subtract  $\frac{1}{16}$  in. from the measured value.

4.6 Record the net value (original value minus 1 mm or  $\frac{1}{16}$  in.).

4.7 To verify the new dip tube specification, prepare a sample mechanical pump dispenser with the newly-specified dip tube length.