
**Textile machinery and accessories —
Beams for winding —**

Part 2:
Warper's beams

Matériel pour l'industrie textile — Ensembles pour enroulement —

Partie 2: Ensembles d'ourdissaires

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 8116-2:2008](https://standards.iteh.ai/catalog/standards/sist/7f2085b4-623c-46c7-9c3d-07c655090859/iso-8116-2-2008)

<https://standards.iteh.ai/catalog/standards/sist/7f2085b4-623c-46c7-9c3d-07c655090859/iso-8116-2-2008>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8116-2:2008

<https://standards.iteh.ai/catalog/standards/sist/7f2085b4-623c-46c7-9c3d-07c655090859/iso-8116-2-2008>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2008

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 8116-2 was prepared by Technical Committee ISO/TC 72, *Textile machinery and accessories*, Subcommittee SC 3, *Machinery for fabric manufacturing including preparatory machinery and accessories*.

This third edition cancels and replaces the second edition (ISO 8116-2:1995), which has been technically revised.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8116 consists of the following parts, under the general title *Textile machinery and accessories — Beams for winding*:

- <https://standards.iteh.ai/catalog/standards/sist/7f2085b4-623c-46c7-9c3d-07c655090859/iso-8116-2-2008>
- *Part 1: General vocabulary*
 - *Part 2: Warper's beams*
 - *Part 3: Weaver's beams*
 - *Part 4: Test methods and quality classification of flanges for weaver's beams, warper's beams and sectional beams*
 - *Part 5: Sectional beams for warp knitting machines*
 - *Part 6: Beams for ribbon weaving and ribbon knitting*
 - *Part 7: Beams for dyeing slivers, rovings and yarns*
 - *Part 8: Definitions of run-out tolerances and methods of measurement*
 - *Part 9: Dyeing beams for textile fabrics*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8116-2:2008

<https://standards.iteh.ai/catalog/standards/sist/7f2085b4-623c-46c7-9c3d-07c655090859/iso-8116-2-2008>

Textile machinery and accessories — Beams for winding —

Part 2: Warper's beams

1 Scope

This part of ISO 8116 specifies the main dimensions, mechanical strength, permissible tolerances of form and position of the main elements of warper's beams, and the driving devices and designation for warper's beams with and without shafts.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-2, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts*

ISO 1940-1, *Mechanical vibration — Balance quality requirements for rotors in a constant (rigid) state — Part 1: Specification and verification of balance tolerances*

ISO 8116-4, *Textile machinery and accessories — Beams for winding — Part 4: Test methods and quality classification of flanges for weaver's beams, warper's beams and sectional beams*

ISO 8116-8, *Textile machinery and accessories — Beams for winding — Part 8: Definitions of run-out tolerances and methods of measurement*

3 Types and main dimensions


Warper's beams are divided into three main types:

- Type A warper's beams with shafts;
- Type B warper's beams with cylinder bore for centring and key seat for driving;
- Type C warper's beams with toothed cone for centring and driving:
 - Execution C1: tooth number 50 (old executions shall no be longer used)
 - Execution C2: tooth number 72
 - Execution C3: tooth number 50

The main dimensions of warper's beams of Type A and Type B are shown and explained in Figure 1 and Figure 2.

The main dimensions of warper's beams of Type C are shown and explained in Figure 3.

The main dimensions of warper's beams of Type A and Type B, as given in Table 1, shall be met. The main dimensions of warper's beams of Type C, as given in Table 2, shall be met.

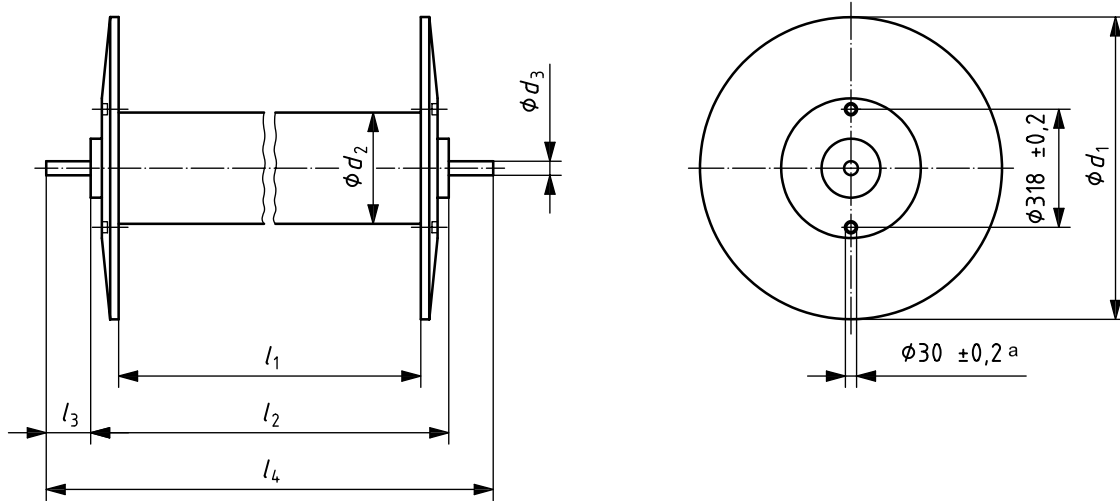


Key

- d_1 flange diameter
- d_2 barrel diameter
- d_3 shaft diameter
- ^a Two pegs for drive pins.

- l_1 distance between the flanges
- l_2 overall length (without shafts)
- l_3 length or extension of shaft
- l_4 total length (with shafts)

ISO 8116-2:2008
Figure 1 — Warper's beams with shafts — Type A
 07c655090859/iso-8116-2-2008

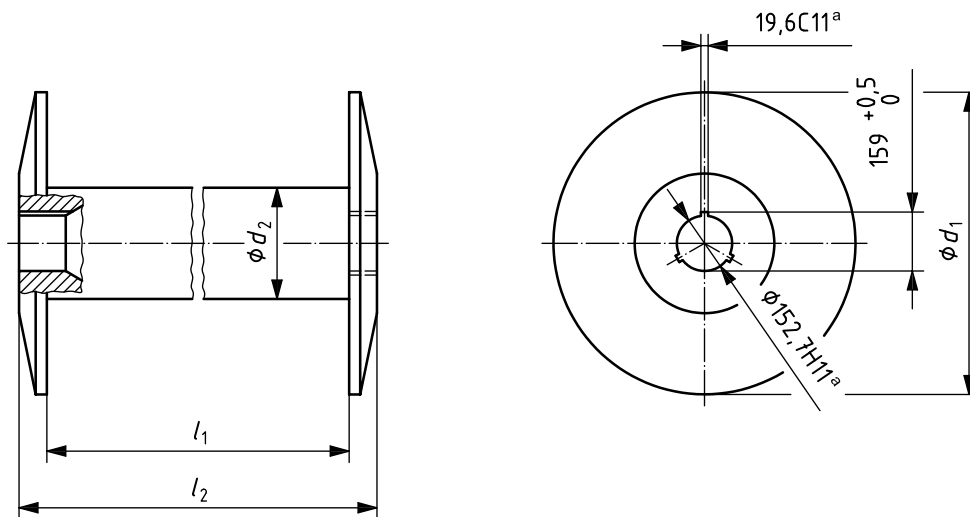

Key

- d_1 flange diameter
- d_2 barrel diameter
- l_1 distance between the flanges
- l_2 overall length (without shafts)

^a Standard tolerance grades and limit deviations in accordance with ISO 286-2.

Figure 2 — Warper's beams with cylinder bore for centring and keyseat for driving — Type B

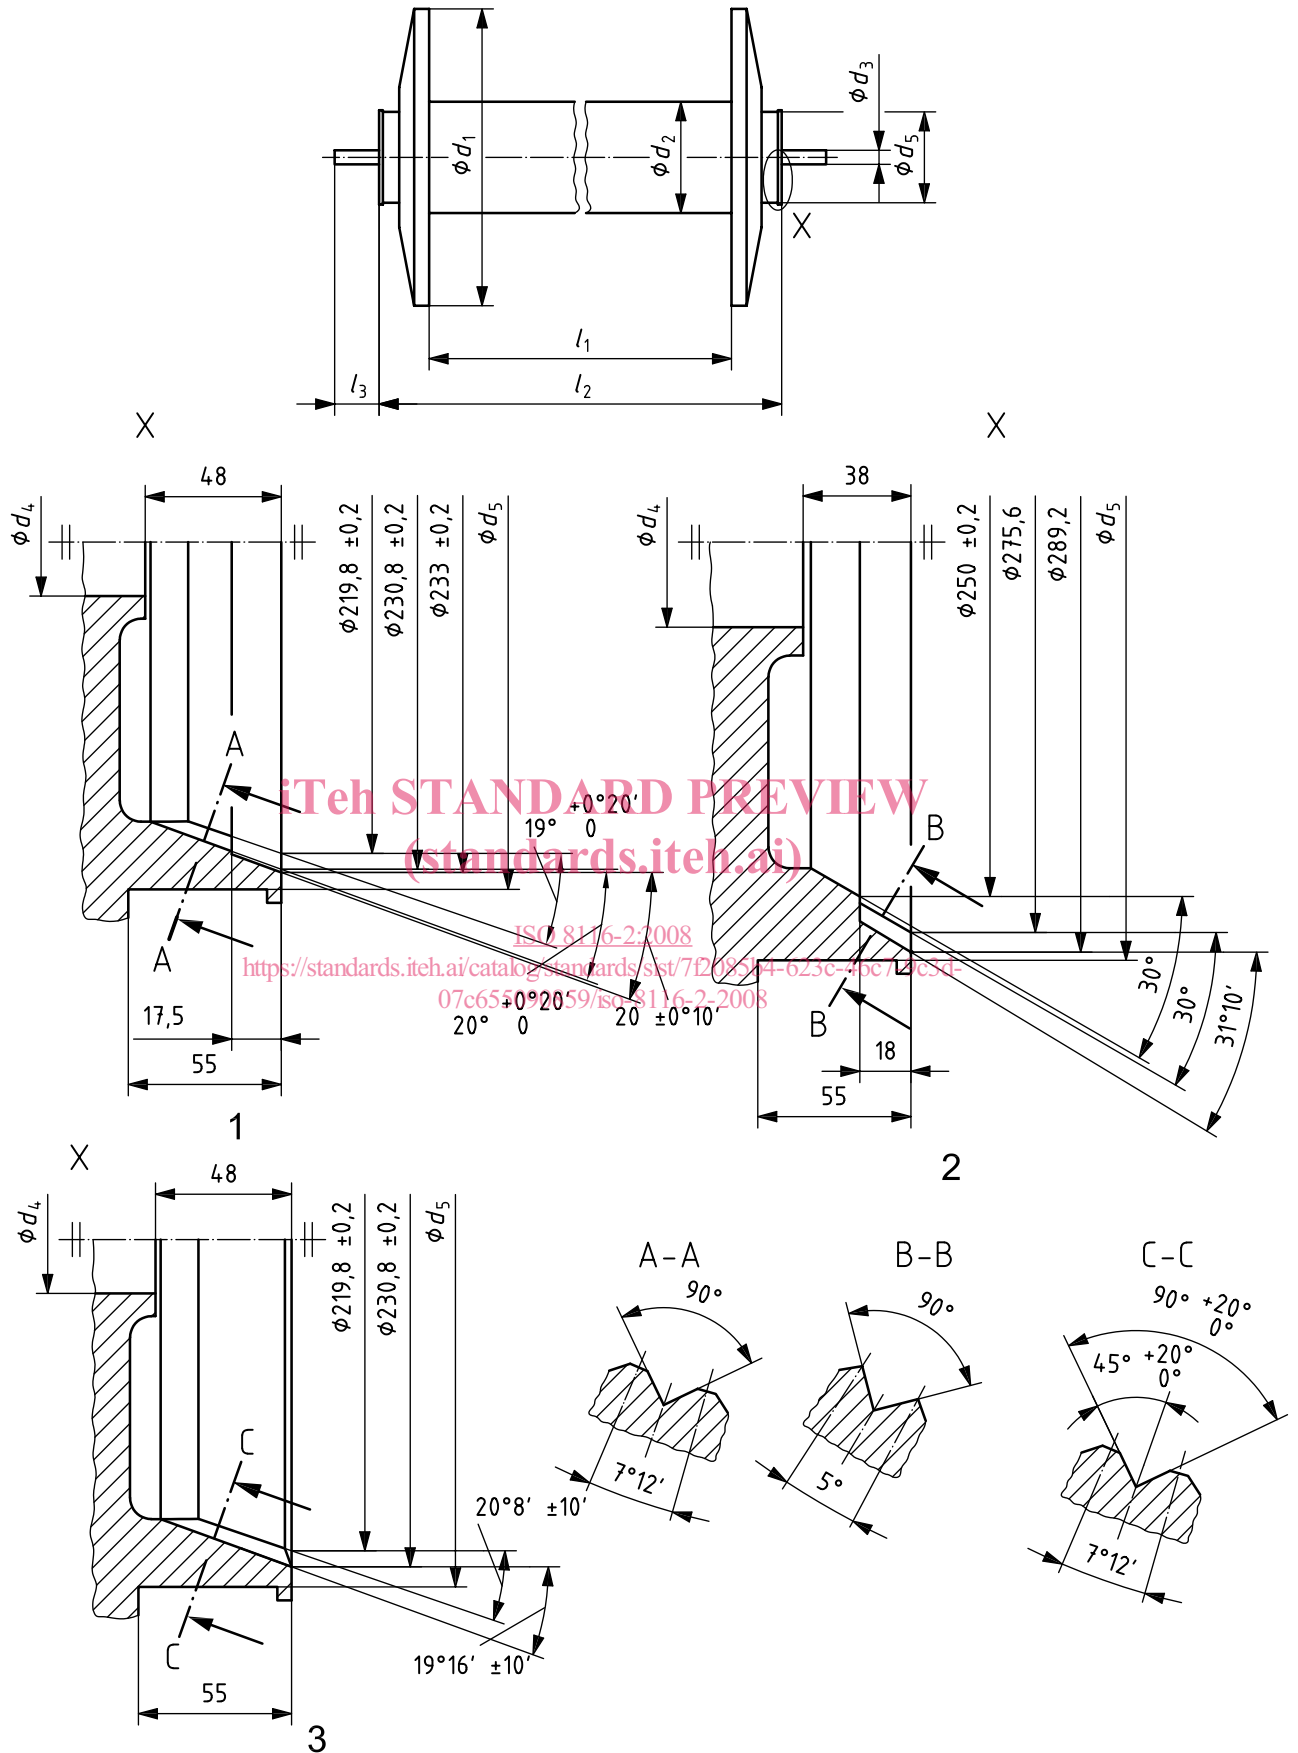


Figure 3 (continued)

Key

- | | |
|---------------------------------|---------------------------------------|
| 1 execution C1: tooth number 50 | d_4 bore diameter for shaft |
| 2 execution C2: tooth number 72 | d_5 ruffle diameter |
| 3 execution C3: tooth number 50 | l_1 distance between the flanges |
| d_1 flange diameter | l_2 overall length (without shafts) |
| d_2 barrel diameter | l_3 length or extension of shaft |
| d_3 shaft diameter | |

Figure 3 — Warper’s beams with toothed cone for centring and driving — Type C

Table 1 — Warper’s beams main dimensions — Types A and B

Dimensions in millimetres

d_1 $\pm 1,5$	d_2 ± 5	d_3 h11 ^b	l_1 ^a $+1,5$ 0	l_2 0 -2	l_3	l_4
815	300 (320)	38	1 378 1 524 1 800 2 000	$l_1 + 150$	120	$l_2 + 2 l_3$
915		50				
1 015		50				
1 250		50				
NOTE The dimensions in parentheses should be avoided whenever possible.						
^a If distances of more than 2 000 mm between flanges are necessary, increments of 200 mm shall be selected.						
^b Standard tolerance grades and limit deviations in accordance with ISO 286-2.						

Table 2 — Warper’s beams main dimensions — Type C

Dimensions in millimetres

d_1 $\pm 1,5$	d_2 ± 5	d_3 h11 ^b	d_4 E9 ^b	d_5 Execution			l_1 ^a $+1,5$ 0	l_2 0 -2	l_3
				C1	C2	C3			
800	300 (320)	38	38	245	295	245	(1 374) 1 400 (1 524) 1 600 1 800 2 000	$l_1 + 270$	120 150
(900)		50	50						
1 000		50	50						
(1 100)	360	60	60	260	260	260	2 000	$l_1 + 320$	
1 250	400								
1 400	450								
NOTE The dimensions in parentheses should be avoided whenever possible.									
^a If distances of more than 2 000 mm between flanges are necessary, increments of 200 mm shall be selected.									
^b Standard tolerance grades and limit deviations in accordance with ISO 286-2.									

4 Mechanical strength

The mechanical strength of warper's beam flanges is classified in accordance with the quality classes defined in ISO 8116-4. The mechanical strength of warper's beam flanges shall be verified, depending on the quality class, using the test method described in ISO 8116-4.

5 Circular axial run-out tolerance, T_a , of flanges

The permissible circular axial run-out tolerances, T_a , of flanges, as given in Table 3, shall be met.

The run-out tolerances shall be measured in accordance with ISO 8116-8.

Table 3 — Permissible circular axial run-out tolerance of flanges

d_1 mm	T_a mm
$d_1 \leq 915$	0,5
$d_1 > 915$	0,75

6 Total run-out tolerance, T_r , of the barrel

The permissible total run-out tolerances, T_r , of the barrel shall be derived using the formulae given in Table 4.

The run-out tolerances shall be measured in accordance with ISO 8116-8.

Table 4 — Total barrel run-out tolerances

Yarn to be wound	T_r mm
Filament yarn	$\frac{0,25 l_1}{1000}$
Spun yarn	$\frac{0,4 l_1}{1000}$

7 Residual imbalance

Depending on the circumstances, it may be necessary to fix a value for the residual imbalance of warper's beams. In general, a quality grade G 6,3 in accordance with ISO 1940-1 will be appropriate. If special conditions call for another grade, this shall be specified.