



**Integrated broadband cable
telecommunication networks (CABLE);
Testing;**

**Conformance test specifications for 464XLAT technology;
Part 3: Abstract Test Suite (ATS) and Protocol Implementation
eXtra Information for Testing (PIXIT)**

RELEASEREFERENCE PREVIEW
<https://standards.etsi.org/draft/etsi-ts-103-242-3-v1.1.1-dd90-4501-9a12a2e22a9biba1>



Reference
DTS/CABLE-00014-3

Keywords
464XLAT, ATS, CLAT, IP, IPv6, PLAT

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and
of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	7
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Abstract test method.....	8
4.1 Abstract protocol tester	8
4.2 Test configurations	9
4.2.1 CF01: CLAT as IUT	9
4.2.2 CF02: PLAT as IUT	10
4.3 TTCN-3 Test architecture.....	10
4.4 Ports and ASPs (Abstract Services Primitives).....	13
4.4.1 TTCN-3 ports.....	13
4.4.2 Abstract Service Primitives	13
5 Implemented Test Purposes.....	14
6 ATS conventions.....	14
6.1 Naming conventions.....	14
6.1.1 General guidelines	14
6.1.2 464XLAT specific TTCN-3 naming conventions.....	15
6.1.3 Usage of Log statements	16
6.1.4 Test Case (TC) identifier	16
6.2 On line documentation	17
Annex A (normative): Partial PIXIT proforma for 464XLAT.....	18
A.1 Identification summary.....	18
A.2 ATS summary	18
A.3 Test laboratory.....	18
A.4 Client identification.....	18
A.5 SUT	19
A.6 Protocol layer information.....	19
A.6.1 Protocol identification	19
A.6.2 IUT information	20
Annex B (normative): PCTR Proforma for 464XLAT.....	22
B.1 Identification summary.....	22
B.1.1 Protocol conformance test report.....	22
B.1.2 IUT identification.....	22
B.1.3 Testing environment.....	22
B.1.4 Limits and reservation	23
B.1.5 Comments.....	23
B.2 IUT Conformance status	23
B.3 Static conformance summary	23

B.4	Dynamic conformance summary.....	24
B.5	Static conformance review report.....	24
B.6	Test campaign report.....	25
B.7	Observations.....	26
Annex C (normative):	TTCN-3 library modules.....	27
C.1	Electronic annex, zip file with TTCN-3 code	27
Annex D (informative):	Bibliography.....	28
History	29

iteh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/2a9biba1-dd90-4501-9a15-942e1071865d/etsi-ts-103-242-3-v1.1.1-2014-12>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Integrated broadband cable telecommunication networks (CABLE).

The present document is part 3 of a multi-part deliverable covering the conformance test specification for 464XLAT technology.

- Part 1: "Test requirements and Protocol Implementation Conformance Statement (PICS) proforma";
- Part 2: "Test Suite Structure and Test Purposes (TSS&TP)";
- Part 3: "Abstract Test Suite (ATS) and Protocol Implementation eXtra Information for Testing (PIXIT)".**

The development of the present document follows the guidance provided in ETSI EG 202 798 [i.1]. Therefore the present document is also based on the guidance provided in ETSI EG 202 798 [i.1].

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "may not", "need", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document contains the Abstract Test Suite (ATS) for 464XLAT technology as defined in RFC 6052 [1] and RFC 6877 [2] which address specific cable industry requirements as defined in ETSI TS 101 569-1 [10] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [6].

The objective of the present document is to provide a basis for conformance tests for 464XLAT technology equipment giving a high probability of inter-operability between different manufacturer's equipment.

The ISO standards for the methodology of conformance testing (ISO/IEC 9646-1 [3] and ISO/IEC 9646-2 [4]) as well as the ETSI rules for conformance testing (ETSI ETS 300 406 [7]) are used as a basis for the test methodology.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

- [1] IETF RFC 6052: "IPv6 addressing of IPv4/IPv6 translators".
- [2] IETF RFC 6877: "464XLAT: Combination of Stateful and Stateless Translation".
- [3] ISO/IEC 9646-1 (1994): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".
- [4] ISO/IEC 9646-2 (1994): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 2: Abstract Test Suite specification".
- [5] ISO/IEC 9646-6 (1994): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 6: Protocol profile test specification".
- [6] ISO/IEC 9646-7 (1995): "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 7: Implementation Conformance Statements".
- [7] ETSI ETS 300 406 (1995): "Methods for testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
- [8] ETSI ES 201 873-1: "Methods for Testing and Specification (MTS); The Testing and Test Control Notation version 3; Part 1: TTCN-3 Core Language".
- [9] ETSI TS 103 242-2: "Integrated broadband cable telecommunication networks (CABLE); Testing; Conformance test specifications for 464XLAT technology; Part 2: Test Suite Structure and Test Purposes (TSS&TP)".
- [10] ETSI TS 101 569-1: "Integrated Broadband Cable Telecommunication Networks (CABLE); Cable Network Transition to IPv6 Part 1: IPv6 Transition Requirements".

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EG 202 798: "Intelligent Transport Systems (ITS); Testing; Framework for conformance and interoperability testing".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in ETSI TS 101 569-1 [10], ISO/IEC 9646-1 [3] and ISO/IEC 9646-7 [6] apply.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply.

ALG	Application Layer Gateway
ASP	Abstract Services Primitives
ATM	Abstract Test Method
ATS	Abstract Test Suite
CLAT	Customer-side XLAT
CPE	Customer Premises Equipment
DHCP	Dynamic Host Configuration Protocol
DNS	Domain Name System
FTP	File Transfer Protocol
HTML	HyperText Markup Language
HTTP	HyperText Transfer Protocol
ICMP	Internet Control Message Protocol
IETF	Internet Engineering Task Force
IP	Internet Protocol
IPv4	IP version 4
IPv6	IP version 6
IUT	Implementation Under Test
MTC	Main Test Component
MTS	Methods for Testing and Specification
MTU	Maximum Transmission Unit
NAT	Network Address Translator
NPU	Network Processing Unit
PA	Platform Adaptor
PIXIT	Protocol Implementation eXtra Information for Testing
PLAT	Provider-side XLAT
PPTP	Point-to-Point Tunneling Protocol
PTC	Parallel Test Component
RFC	Request For Comments
RTSP	Real-Time Streaming Protocol
SA	System Adaptor
SIP	Session Initiation Protocol
SUT	System Under Test
TA	Test Adaptor
TC	Test Case
TCP	Transmission Control Protocol
TP	Test Purpose
TSS	Test Suite Structure
TTCN	Testing and Test Control Notation
XLAT	(Address) Translator

RSTP	Rapid Spanning Tree Protocol
GRT	Global Routing Table
VRF	Virtual Routing and Forwarding
MSS	Maximum Segment Size

4 Abstract test method

This clause describes the ATM used to test the 464XLAT technology.

4.1 Abstract protocol tester

An abstract protocol tester presented in figure 1 is a process providing the test behaviour for testing an IUT. Thus it will emulate an entity which is capable of proving the IUT functionalities. This type of test architecture provides a situation of communication which is equivalent to real operation between real devices. The test system will simulate valid and invalid behaviours, and will analyse the reaction of the IUT. Then the test verdict, e.g. pass or fail, will depend on the result of this analysis. Thus this type of test architecture enables to focus the test objective on the IUT behaviour only.

In order to access an IUT, the corresponding abstract protocol tester needs to use lower layers to establish a proper connection to the system under test (SUT) over a physical link (Lower layers link).


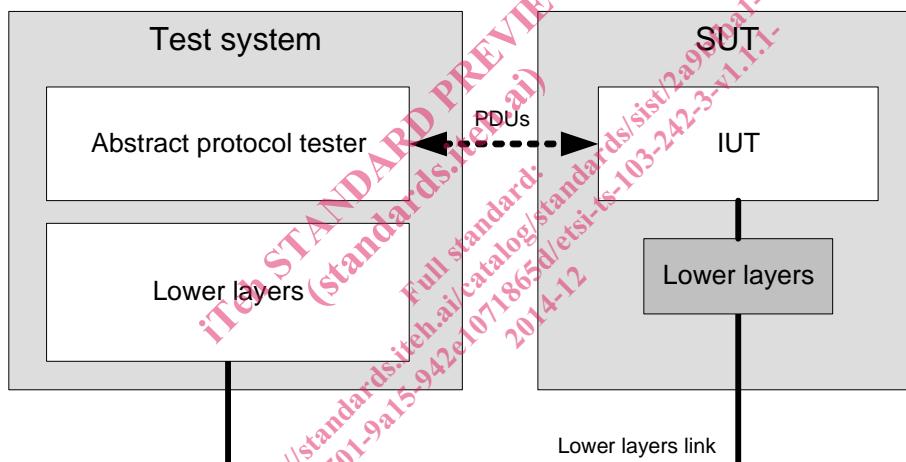


Figure 1: Generic abstract protocol tester

The "Protocol Data Units" (PDUs) are the messages exchanged between the IUT and the abstract protocol tester which permits to trigger the IUT and to analyse its reaction. The result of the analysis allows to assign the test verdict.

Further control actions on the IUT may be necessary from inside the SUT, for instance to simulate a primitive from the upper layer or the management/security entity. Further details on such control actions are provided by means of an upper tester presented in clause 4.3.

The above "Abstract Test Method" (ATM) is well defined in ISO/IEC 9646-1 [3] and supports a wide range of approaches for testing including the TTCN-3 abstract test language [8]. The abstract protocol tester used for 464XLAT test suite is described in figure 2. The test system will send and receive IP packets, by using other upper layer protocols such as DHCP, DNS and FTP, in order to analyse 464XLAT functionality.

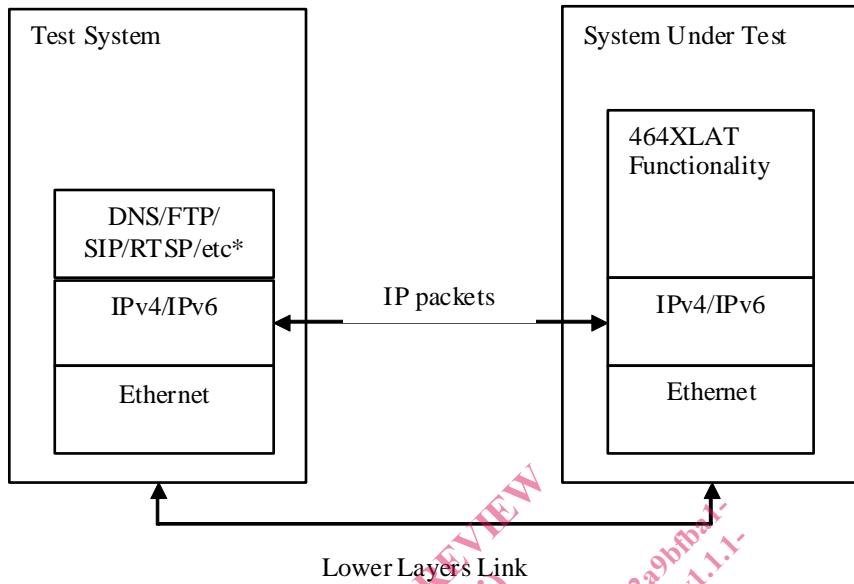

NOTE: * Those protocols are used to prove certain 464XLAT functionalities.

Figure 2: Abstract Protocol Tester - 464XLAT

4.2 Test configurations

The test suite for 464XLAT uses only a test configuration to cover the different tests. Distinction between the two configurations is given by the two main components in 464XLAT, which are the Customer side XLAT (CLAT) and the Provider side XLAT (PLAT).

4.2.1 CF01: CLAT as IUT

In this configuration, the CLAT is the IUT and the test system simulates an IPv6 client in one side and a IPv4 server in the other side.

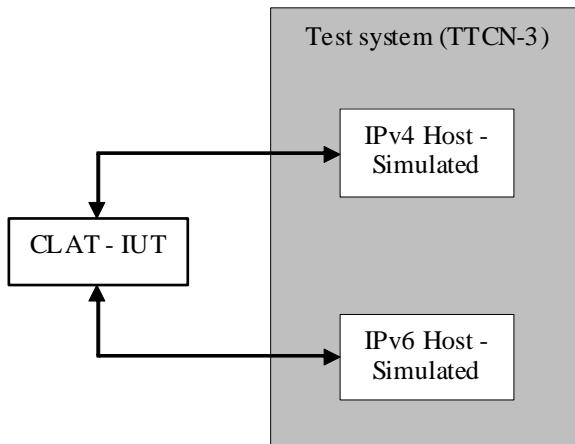


Figure 3: CF01, CLAT equipment is the IUT

4.2.2 CF02: PLAT as IUT

In this configuration, the PLAT is the IUT and the test system simulates an IPv6 client in one side and a IPv4 server in the other side.

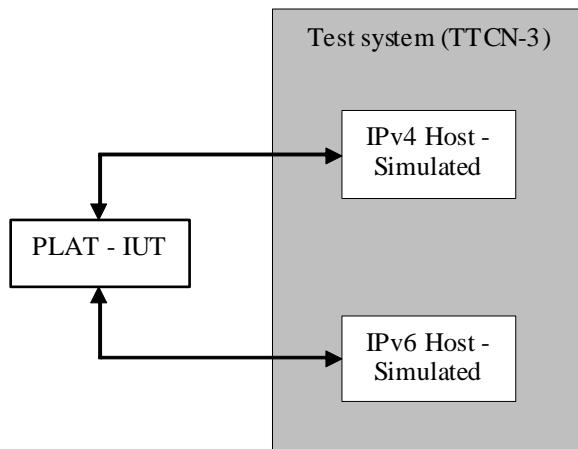


Figure 4: CF02, PLAT equipment is the IUT

4.3 TTCN-3 Test architecture

In general, a conformance test system architecture based on TTCN-3 is as figure 5 shows.

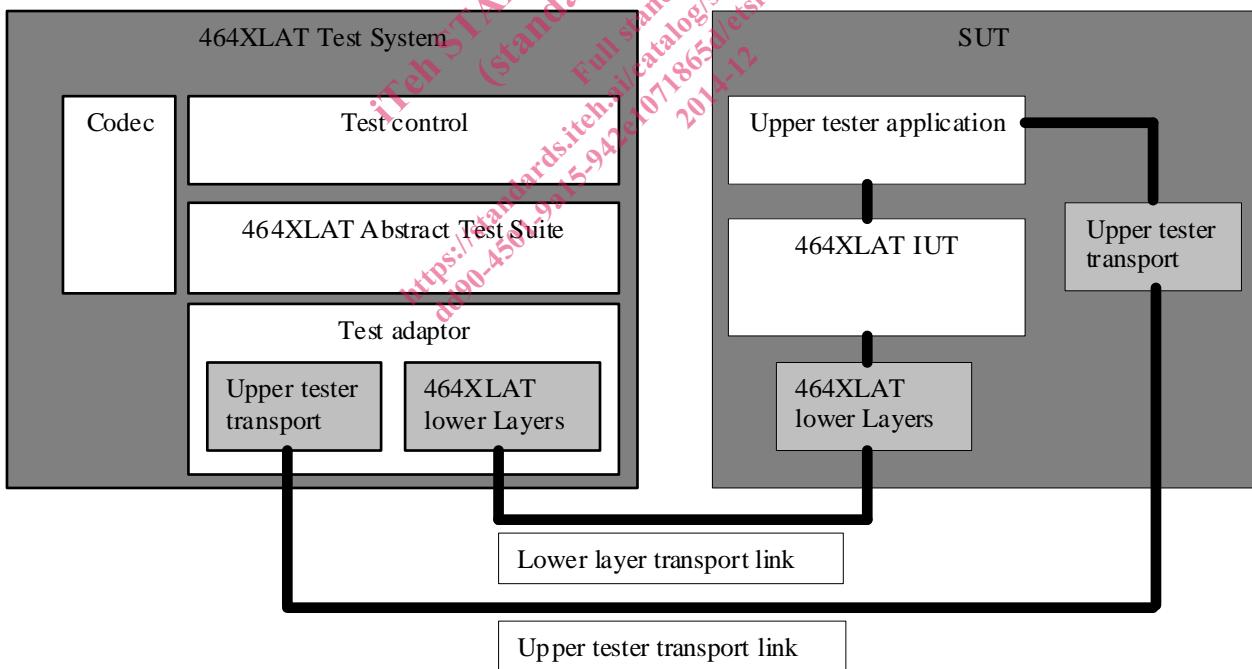


Figure 5: Global test architecture

The "System Under Test" (SUT) contains:

- The "Implementation Under Test" (IUT), i.e. the object of the test.
- The "Upper tester application" enables to trigger or capture some actions (i.e. higher layer service primitives) on the IUT.