
Elektromagnetna združljivost (EMC) in zadeve v zvezi z radijskim spektrom (ERM) - Prizemni letalski telefonski sistem (TFTS) - 2. del: Govorne storitve, radijski vmesnik

ElectroMagnetic Compatibility and Radio Spectrum Matters (ERM); Terrestrial Flight Telecommunications System (TFTS); Part 2: Speech services, radio interface

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 326-2:1999](https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-ccc6d857d561/sist-ets-300-326-2-1999)

Ta slovenski standard je istoveten z: **ETS 300 326-2 Edition 2**

ICS:

| | | |
|-----------|--|--|
| 33.060.01 | Radijske komunikacije na splošno | Radiocommunications in general |
| 33.100.01 | Elektromagnetna združljivost na splošno | Electromagnetic compatibility in general |
| 49.090 | U] ^ { aš / š • d ~ { ^ } cš : æ } aš / š • [b \ aš cš @ | On-board equipment and instruments |


SIST ETS 300 326-2:1999

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 326-2:1999

<https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-ccc0d859d361/sist-ets-300-326-2-1999>

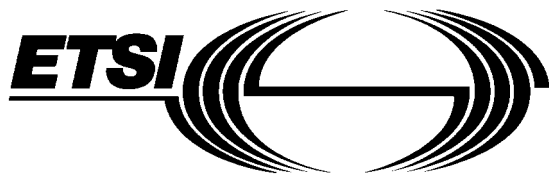

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 326-2

August 1998

Second Edition

Source: ERM

Reference: RE/ERM-RP05-005-2

ICS: 33.020

Key words: interface, radio, speech, TFTS

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Terrestrial Flight Telecommunications System (TFTS);
Part 2: Speech services, radio interface**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

Internet: secretariat@etsi.fr - <http://www.etsi.fr> - <http://www.etsi.org>

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 326-2:1999](https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-ccc0d859d361/sist-ets-300-326-2-1999)

<https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-ccc0d859d361/sist-ets-300-326-2-1999>

Contents

| | |
|---|----|
| Foreword | 13 |
| Introduction | 13 |
| 1 Scope | 15 |
| 2 Normative references | 15 |
| 3 Abbreviations | 17 |
| 4 Introduction to Terrestrial Flight Telecommunications System (TFTS) | 19 |
| 4.1 General | 19 |
| 4.2 Interface specification objectives | 20 |
| 4.3 Interface characteristics | 20 |
| 5 Protocol modelling principles | 20 |
| 5.1 AS-GSS layering | 20 |
| 6 TFTS user-to-network reference configuration | 22 |
| 6.1 General | 22 |
| 6.1.1 Reference configurations | 22 |
| 6.1.2 Functional groups | 22 |
| 6.1.3 Reference points | 22 |
| 6.1.4 Terminal Equipment (TE) | 23 |
| 6.2 TFTS reference configuration | 23 |
| 6.3 Interfaces | 25 |
| 7 Channel structures and access capabilities | 25 |
| 7.1 General | 25 |
| 7.2 Channel types and their use: Traffic Channels (TCH) | 25 |
| 7.3 Channel types and their use: Control channels | 26 |
| 7.3.1 Logical control channel types | 26 |
| 7.3.1.1 Broadcast Control CHannel (BCCH) | 26 |
| 7.3.1.2 Random Access CHannel (RACH) | 26 |
| 7.3.1.3 Initial Response Control CHannel (IRCCH) | 26 |
| 7.3.1.4 Radio Control CHannel (RCCH) | 26 |
| 7.3.1.5 Dedicated Control CHannel (DCCH) | 26 |
| 7.4 GS Access capability | 26 |
| 7.5 AS access capability | 28 |
| 8 TFTS Radio Interface layer 1 | 29 |
| 8.1 Interfaces to the physical layer | 29 |
| 8.1.1 Interface to layer 2 | 29 |
| 8.1.2 Interface to radio resource management | 29 |
| 8.1.3 Interface to other functional units | 29 |
| 8.2 Services of layer 1 | 30 |
| 8.2.1 Service Access Point (SAP) | 30 |
| 8.2.2 Service provided | 30 |
| 8.2.2.1 Specific services of layer 1 in the AS | 30 |
| 8.3 Primitives of layer 1 | 31 |
| 8.3.1 Generic names of primitives between layer 1 and layer 2 for the transfer of layer 2 frames | 31 |
| 8.3.2 Generic names of primitives between layer 1 and the radio resource management entity of layer 3 | 31 |

| | | |
|-----------|---|----|
| 8.3.3 | Primitive types..... | 32 |
| 8.3.4 | Parameter definition..... | 32 |
| 8.4 | Layer 1 procedures..... | 33 |
| 8.4.1 | States of layer 1..... | 33 |
| 8.4.2 | Remap procedure..... | 33 |
| 8.4.2.1 | Channel remap protocol..... | 34 |
| 8.4.3 | Layer 1 interface procedures..... | 34 |
| 8.5 | Layer 1 peer to peer exchanges..... | 35 |
| 8.5.1 | BCCH Synchronization (S) transmission..... | 35 |
| 8.5.2 | Layer 1 radio control..... | 35 |
| 8.5.3 | Layer 1 random access procedures..... | 35 |
| 8.5.4 | Layer 1 channel access transaction..... | 36 |
| 8.6 | TDMA characteristics (Time Division Multiple Access)..... | 36 |
| 8.6.1 | General..... | 36 |
| 8.6.2 | Slot structure..... | 37 |
| 8.6.2.1 | General slot types..... | 37 |
| 8.6.2.1.1 | Field data..... | 38 |
| 8.6.2.2 | Synchronization slot types..... | 38 |
| 8.6.2.2.1 | Field data..... | 38 |
| 8.6.3 | Functions of logical channels and mapping to physical channels..... | 40 |
| 8.6.4 | Timing requirements..... | 44 |
| 8.6.5 | Coding aspects..... | 44 |
| 8.6.5.1 | G1 slot..... | 44 |
| 8.6.5.2 | G2 slot..... | 44 |
| 8.6.5.3 | G3 slot..... | 44 |
| 8.6.5.4 | Coding and interleaving of G2 and G3 slots..... | 44 |
| 8.6.5.5 | Coding of S1 slot..... | 46 |
| 8.6.5.6 | Coding of S2 slot..... | 46 |
| 8.7 | Modulation characteristics..... | 46 |
| 8.7.1 | General..... | 46 |
| 8.7.1.1 | Type of modulation..... | 46 |
| 8.7.1.2 | Channel transmission rate..... | 47 |
| 8.7.1.3 | Data clock stability..... | 47 |
| 8.7.2 | Modulator..... | 47 |
| 8.7.2.1 | Phase definition..... | 47 |
| 8.7.2.2 | Modulation filtering and modulated signal definition..... | 48 |
| 8.7.2.3 | Modulator and transmitter accuracy..... | 49 |
| 8.7.2.3.1 | Ideal case..... | 50 |
| 8.7.2.3.2 | Real case..... | 50 |
| 8.7.2.4 | Scrambler..... | 51 |
| 8.8 | Radio transmission and reception characteristics..... | 51 |
| 8.8.1 | General characteristics..... | 51 |
| 8.8.1.1 | Channelling..... | 51 |
| 8.8.1.1.1 | Frequency range..... | 51 |
| 8.8.1.1.2 | Radio frequency channel arrangement..... | 52 |
| 8.8.1.2 | Channel selection time..... | 52 |
| 8.8.1.3 | Frequency stability..... | 52 |
| 8.8.1.3.1 | AS..... | 52 |
| 8.8.1.3.2 | GS..... | 52 |
| 8.8.1.4 | Modulation..... | 52 |
| 8.8.2 | Transmitter..... | 52 |
| 8.8.2.1 | Polarization..... | 52 |
| 8.8.2.2 | Radiated power..... | 52 |
| 8.8.2.2.1 | AS..... | 52 |
| 8.8.2.2.2 | GS..... | 53 |
| 8.8.2.3 | Power ramping procedure in the AS..... | 54 |
| 8.8.2.4 | RF spectrum mask..... | 54 |
| 8.8.2.5 | Out of band emissions..... | 55 |
| 8.8.2.6 | Spurious emissions..... | 55 |
| 8.8.2.7 | Modulation accuracy..... | 55 |

| | | |
|------------|--|----|
| 8.8.3 | Receiver | 55 |
| 8.8.3.1 | Frequency offsets..... | 55 |
| 8.8.3.2 | Static propagation conditions..... | 56 |
| 8.8.3.2.1 | Without interferer | 56 |
| 8.8.3.2.2 | With an interferer created by the intermodulation of two interfering signals..... | 56 |
| 8.8.3.2.3 | With adjacent interferer: TDM at the AS receiver and TDMA (uniform timeslot level) at the GS receiver..... | 56 |
| 8.8.3.2.4 | With co-channel TDMA interferer: variable timeslot level for GS receiver .. | 57 |
| 8.8.4 | Dynamic propagation conditions | 57 |
| 8.8.4.1 | Basic BERs..... | 57 |
| 8.8.4.2 | BERs with interfering signals | 57 |
| 8.8.4.3 | GS receivers | 58 |
| 8.8.5 | Propagation models..... | 58 |
| 8.8.5.1 | General | 58 |
| 8.8.5.2 | Doppler spectrum types | 58 |
| 8.8.5.3 | Models | 59 |
| 8.8.5.3.1 | Airport manoeuvring..... | 59 |
| 8.8.5.3.2 | Take-off | 60 |
| 8.8.5.3.3 | In-flight | 60 |
| 8.9 | GS antenna characteristics | 60 |
| 8.9.1 | General | 60 |
| 8.9.2 | Common characteristics for all GS types..... | 60 |
| 8.9.2.1 | Frequency range | 60 |
| 8.9.2.2 | Polarization | 60 |
| 8.9.2.3 | Energy acceptance capability | 61 |
| 8.9.3 | Specific characteristics for each type of GS | 61 |
| 8.9.3.1 | Radiation patterns | 61 |
| 8.9.3.1.1 | En route stations | 61 |
| 8.9.3.1.2 | Intermediate stations | 62 |
| 8.9.3.1.3 | Airport stations..... | 62 |
| 8.9.3.2 | Antenna height..... | 62 |
| 8.10 | Radio sub-system link control..... | 62 |
| 8.10.1 | General | 62 |
| 8.10.2 | Handover general | 62 |
| 8.10.2.1 | Overall process | 62 |
| 8.10.2.2 | Decision strategy for GS to GS handover..... | 63 |
| 8.10.2.2.1 | Primary handover decision | 63 |
| 8.10.3 | R.F. power control | 63 |
| 8.10.3.1 | Purpose..... | 63 |
| 8.10.3.2 | Timing..... | 63 |
| 8.10.3.3 | Initial exchanges | 63 |
| 8.10.4 | RF power control at call initiation | 64 |
| 8.10.5 | Handover procedure | 65 |
| 8.10.6 | Cell selection and re-selection | 65 |
| 8.10.6.1 | Overall process | 65 |
| 8.10.6.2 | Reception of broadcast information..... | 65 |
| 8.10.6.3 | GS selection | 65 |
| 8.10.6.4 | Synchronization | 66 |
| 8.10.6.5 | Negotiation..... | 66 |
| 8.10.7 | Network pre-requisites..... | 66 |
| 8.10.7.1 | BCCH..... | 66 |
| 8.10.7.1.1 | BCCH(S) | 66 |
| 8.10.7.1.2 | BCCH(D)..... | 66 |
| 8.10.7.2 | GS Handover | 67 |
| 8.10.8 | Radio Link Measurements (RLM) | 67 |
| 8.10.8.1 | Signal strength | 67 |

| | | | |
|---------|-----------|--|----|
| | 8.10.8.2 | Signal quality | 67 |
| | | 8.10.8.2.1 AS..... | 67 |
| | | 8.10.8.2.2 GS..... | 67 |
| | | 8.10.8.2.3 Range of parameter | 67 |
| | 8.10.8.3 | Absolute distance (AS only)..... | 67 |
| | | 8.10.8.3.1 Range of parameter | 68 |
| | 8.10.8.4 | Radio Link Failure (RLF)..... | 68 |
| 8.10.9 | | Timing control..... | 68 |
| 8.10.10 | | Control parameters..... | 68 |
| | 8.10.10.1 | Definition of network parameters..... | 68 |
| | 8.10.10.2 | Definition of Radio Resource (RR) parameters..... | 69 |
| | 8.10.10.3 | Definition of other parameters..... | 70 |
| | 8.10.10.4 | Calculation of range limit..... | 70 |
| 8.11 | | Radio sub-system synchronization | 71 |
| 8.11.1 | | Introduction | 71 |
| 8.11.2 | | GS synchronization | 71 |
| 8.11.3 | | Cold Start Synchronization (CSS) | 71 |
| | 8.11.3.1 | AS cold start requirements | 71 |
| | | 8.11.3.1.1 GS acquisition..... | 71 |
| | | 8.11.3.1.2 Transmitted S2 slot | 72 |
| | | 8.11.3.1.3 Received G3 slot..... | 72 |
| | | 8.11.3.1.4 Timing adjustment..... | 72 |
| | 8.11.3.2 | GS cold start requirements..... | 72 |
| | | 8.11.3.2.1 S2 reception | 72 |
| 8.11.4 | | Tracking procedure..... | 72 |
| | 8.11.4.1 | AS requirements..... | 72 |
| | 8.11.4.2 | GS requirements..... | 72 |
| 8.11.5 | | Warm Start Synchronization (WSS) | 72 |
| | 8.11.5.1 | GS..... | 72 |
| | 8.11.5.2 | AS..... | 72 |
| 9 | | TFTS radio interface layer 2..... | 73 |
| 9.1 | | General..... | 73 |
| 9.2 | | Layer 2 services..... | 73 |
| 9.3 | | Overview description of LAPDa functions and procedures | 75 |
| | 9.3.1 | General | 75 |
| | 9.3.2 | Unacknowledged operation | 76 |
| | 9.3.3 | Acknowledged operation..... | 77 |
| | 9.3.4 | Information transfer mode..... | 77 |
| | | 9.3.4.1 Information transfer on the BCCH..... | 77 |
| | | 9.3.4.2 Information transfer on the DCCHs..... | 77 |
| | 9.3.5 | Release of layer 2 | 77 |
| | 9.3.6 | Identification of layer 2 end points..... | 77 |
| 9.4 | | Service characteristics and requirements | 78 |
| | 9.4.1 | General requirements | 78 |
| | 9.4.2 | Services provided to layer 3 | 78 |
| | | 9.4.2.1 General..... | 78 |
| | | 9.4.2.2 Priority..... | 78 |
| | | 9.4.2.3 Segmentation | 78 |
| | | 9.4.2.4 Unacknowledged information transfer service..... | 79 |
| | | 9.4.2.5 Acknowledged information transfer service | 79 |
| | 9.4.3 | Services required from the physical layer | 80 |
| | 9.4.4 | Administrative services..... | 81 |
| | | 9.4.4.1 General description of administrative services..... | 81 |
| | | 9.4.4.2 Definition of primitives for administrative services | 81 |
| 9.5 | | Overview of layer 2 structure | 82 |
| | 9.5.1 | Functional composition..... | 82 |
| | 9.5.2 | Layer 2 procedure..... | 82 |
| 9.6 | | Layer 2 specification..... | 83 |
| | 9.6.1 | General | 83 |

| | | | |
|---------|---|--|----|
| 9.6.2 | Frame structure for peer-to-peer communication | 83 | |
| 9.6.2.1 | General | 83 | |
| 9.6.2.2 | Frame format | 83 | |
| 9.6.2.3 | Frame delimitation | 83 | |
| 9.6.2.4 | Header field | 84 | |
| 9.6.2.5 | Information field..... | 84 | |
| 9.6.2.6 | Fill field | 84 | |
| 9.6.2.7 | Frame Check Sequence | 84 | |
| 9.6.2.8 | Format convention | 84 | |
| | 9.6.2.8.1 | Numbering convention..... 84 | |
| | 9.6.2.8.2 | Mapping to layer 1 message data..... 85 | |
| | 9.6.2.8.3 | Field mapping convention | 85 |
| | 9.6.2.9 | Invalid frames..... | 85 |
| 9.6.3 | Elements of procedure and formats of fields for data-link layer peer-to-peer communication..... | 85 | |
| 9.6.3.1 | General | 85 | |
| 9.6.3.2 | Header field format..... | 86 | |
| 9.6.3.3 | Header field variables | 86 | |
| | 9.6.3.3.1 | Command/Response field bit (C/R)..... | 86 |
| | 9.6.3.3.2 | Service Access Point Identifier | 86 |
| | 9.6.3.3.3 | Length field..... | 86 |
| | 9.6.3.3.4 | More data bit (M)..... | 86 |
| | 9.6.3.3.5 | Control field | 87 |
| | 9.6.3.4 | Control field formats | 87 |
| | 9.6.3.4.1 | Information transfer (I) format | 87 |
| | 9.6.3.4.2 | Supervisory (S) format..... | 87 |
| | 9.6.3.4.3 | Unnumbered (U) format | 87 |
| 9.6.3.5 | Control field parameters and associated state variables | 87 | |
| | 9.6.3.5.1 | Poll/Final bit..... | 87 |
| | 9.6.3.5.2 | Multiple frame operation, variables and sequence numbers | 88 |
| | 9.6.3.5.3 | Unacknowledged operation - variables and parameters..... | 88 |
| 9.6.3.6 | Frame types..... | 89 | |
| | 9.6.3.6.1 | Commands and responses..... | 89 |
| | 9.6.3.6.2 | Information (I) commands | 89 |
| | 9.6.3.6.3 | Set Asynchronous Balanced Mode (SABM) command..... | 89 |
| | 9.6.3.6.4 | DISConnect (DISC) command..... | 90 |
| | 9.6.3.6.5 | Unnumbered information (UI) command..... | 90 |
| | 9.6.3.6.6 | Receive Ready (RR) command/response | 90 |
| | 9.6.3.6.7 | Reject (REJ) command/response | 90 |
| | 9.6.3.6.8 | Receive Not Ready (RNR) command/response | 91 |
| | 9.6.3.6.9 | Unnumbered Acknowledgement (UA) response | 91 |
| | 9.6.3.6.10 | Disconnected Mode (DM) response..... | 91 |
| | 9.6.3.6.11 | FRaMe Reject (FRMR) response | 91 |
| 9.6.4 | Elements for layer-to-layer communication | 92 | |
| 9.6.4.1 | General | 92 | |
| | 9.6.4.1.1 | Generic names..... | 92 |
| | 9.6.4.1.2 | Primitive types | 95 |
| | 9.6.4.1.3 | Parameter definition | 95 |
| | 9.6.4.2 | Primitive procedures | 96 |
| 9.6.5 | Definition of the peer-to-peer procedures of the data link layer | 96 | |
| 9.6.5.1 | General | 96 | |
| 9.6.5.2 | Procedure for the use of the P/F bit | 97 | |
| | 9.6.5.2.1 | Unacknowledged information transfer... 97 | |

iTeh STANDARD PREVIEW
(standards.iTeh.ai)

SIST ETS 300 326-2:1999

<https://standards.iTeh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-cc0d859d361/sist-ets-300-326-2-1999>

| | | | |
|---------|-----------|---|-----|
| | 9.6.5.2.2 | Acknowledged multiple frame information transfer..... | 97 |
| 9.6.5.3 | | Procedures for unacknowledged information transfer..... | 97 |
| | 9.6.5.3.1 | General | 97 |
| | 9.6.5.3.2 | Transmission of unacknowledged information..... | 97 |
| | 9.6.5.3.3 | Receipt of unacknowledged information..... | 97 |
| 9.6.5.4 | | Procedures for establishment and release of multiple frame operation | 98 |
| | 9.6.5.4.1 | Establishment of multiple frame operation | 98 |
| | 9.6.5.4.2 | Information transfer | 101 |
| | 9.6.5.4.3 | Suspension and resumption of multiple frame operation..... | 102 |
| | 9.6.5.4.4 | Resumption of multiple frame operation | 103 |
| | 9.6.5.4.5 | Termination of multiple frame operation | 104 |
| | 9.6.5.4.6 | Idle state | 105 |
| | 9.6.5.4.7 | Collision of unnumbered commands and responses | 106 |
| 9.6.5.5 | | Procedures for information transfer in multiple frame operation..... | 106 |
| | 9.6.5.5.1 | Transmitting I frames..... | 106 |
| | 9.6.5.5.2 | Receiving I frames..... | 107 |
| | 9.6.5.5.3 | Receiving acknowledgement..... | 108 |
| | 9.6.5.5.4 | Receiving REJ frames..... | 108 |
| | 9.6.5.5.5 | Receiving RNR frames..... | 109 |
| | 9.6.5.5.6 | Data link layer own receiver busy condition | 111 |
| | 9.6.5.5.7 | Waiting acknowledgement..... | 111 |
| 9.6.5.6 | | Abnormal release and re-establishment of multiple frame operation..... | 112 |
| | 9.6.5.6.1 | Criteria for re-establishment..... | 112 |
| | 9.6.5.6.2 | Criteria for abnormal release..... | 112 |
| | 9.6.5.6.3 | Procedures for re-establishment..... | 112 |
| | 9.6.5.6.4 | Procedures for abnormal release..... | 112 |
| 9.6.5.7 | | Exception condition reporting and recovery for multiple frame operation | 113 |
| | 9.6.5.7.1 | N(S) sequence error | 113 |
| | 9.6.5.7.2 | N(R) sequence error..... | 113 |
| | 9.6.5.7.3 | Timer recovery..... | 114 |
| | 9.6.5.7.4 | Invalid frame condition | 114 |
| | 9.6.5.7.5 | Frame rejection condition | 114 |
| | 9.6.5.7.6 | Receipt of an FRMR response frame..... | 114 |
| | 9.6.5.7.7 | Radio link failure condition | 114 |
| 9.6.5.8 | | List of system parameters..... | 114 |
| | 9.6.5.8.1 | Timer T200 | 114 |
| | 9.6.5.8.2 | Maximum number of re-transmissions (N200)..... | 114 |
| | 9.6.5.8.3 | Maximum number of octets in an information field (N201)..... | 115 |
| | 9.6.5.8.4 | Number of octets in a frame (N202) ... | 115 |
| | 9.6.5.8.5 | Maximum number of octets in a message unit parameter (N203) | 115 |
| | 9.6.5.8.6 | Maximum number of outstanding I frames (k)..... | 115 |
| 10 | | AS - GSS layer 3 specification | 115 |

| | | |
|-------------|--|-----|
| 10.1 | Introduction..... | 115 |
| 10.1.1 | General | 115 |
| 10.1.2 | Objectives | 115 |
| 10.1.3 | General characteristics..... | 115 |
| 10.1.3.1 | Technique of description..... | 115 |
| 10.1.3.2 | Primitives | 116 |
| 10.1.3.3 | Peer-to-peer communication..... | 116 |
| 10.2 | Structure of signalling functions | 116 |
| 10.2.1 | Basic groups of functions | 116 |
| 10.2.2 | Protocol architecture | 116 |
| 10.3 | Services provided by signalling layer 3 on the AS side..... | 118 |
| 10.3.1 | CC services | 118 |
| 10.3.1.1 | General | 118 |
| 10.3.1.2 | Service state diagram..... | 118 |
| 10.3.1.3 | Service primitives..... | 119 |
| 10.4 | Services provided by signalling layer 3 on the GSS side..... | 120 |
| 10.4.1 | CC services | 120 |
| 10.4.1.1 | General | 120 |
| 10.4.1.2 | Service state diagram..... | 120 |
| 10.4.1.3 | Service primitives..... | 121 |
| 10.5 | Services assumed from signalling layer 2 | 122 |
| 10.5.1 | General | 122 |
| 10.5.2 | Service primitives | 122 |
| 10.5.2.1 | Unacknowledged information transfer..... | 122 |
| 10.5.2.2 | Acknowledged information transfer | 122 |
| 10.6 | Inter-layer service interfaces on the AS side..... | 123 |
| 10.6.1 | Services provided by the RRM entity | 123 |
| 10.6.1.1 | General | 123 |
| 10.6.1.2 | Service state diagram..... | 124 |
| 10.6.1.3 | Service primitives..... | 124 |
| 10.7 | Inter-layer service interfaces on the GS side | 126 |
| 10.7.1 | Services provided by the RRM entity | 126 |
| 10.7.1.1 | General | 126 |
| 10.7.1.2 | Service state diagram..... | 127 |
| 10.7.1.3 | Service primitives..... | 127 |
| 10.8 | Service assumed from layer 1 | 128 |
| 10.8.1 | General | 128 |
| 10.8.2 | Service primitives | 128 |
| 10.9 | Functions provided by layer 3 entities | 129 |
| 10.9.1 | Functions provided by the RRM entity | 129 |
| 10.9.2 | Functions provided by the CC management entity..... | 129 |
| 10.9.3 | Functions provided by the distribution entity..... | 129 |
| 10.9.4 | Functions provided by the MR entity | 129 |
| 10.10 | Call setup examples | 129 |
| 10.11 | Radio interface layer 3 specification | 131 |
| 10.11.1 | General | 131 |
| 10.11.1.1 | Scope of the specification | 131 |
| 10.11.1.2 | Application to the interface structure | 131 |
| 10.11.1.3 | Structure of the layer 3 procedures..... | 132 |
| 10.11.1.4 | Test procedures | 132 |
| 10.11.1.5 | Use of logical channels..... | 132 |
| 10.11.2 | Overview of control procedures..... | 132 |
| 10.11.2.1 | List of procedures..... | 132 |
| 10.11.2.2 | Procedure for contention resolution | 133 |
| 10.11.2.3 | General recovery procedures | 133 |
| 10.11.2.3.1 | Normal message flow | 133 |
| 10.11.2.3.2 | Expiry of the request timer T | 133 |
| 10.11.2.3.3 | Change of dedicated channels using SAPI=0 | 133 |
| 10.11.2.4 | Sequenced message transfer operation | 134 |

| | | | |
|---------|--|--|-----|
| | 10.11.2.4.1 | Variables and sequence numbers | 134 |
| | 10.11.2.4.2 | Procedure for the setting, transfer and termination of sequenced message transfer..... | 134 |
| 10.11.3 | Elementary procedures for RRM | | 135 |
| | 10.11.3.1 | Overview..... | 135 |
| | 10.11.3.1.1 | General | 135 |
| | 10.11.3.1.2 | Service provided to upper layers..... | 135 |
| | 10.11.3.1.3 | Service required from data link and physical layers | 136 |
| | 10.11.3.1.4 | Terminology | 136 |
| | 10.11.3.2 | System management procedures..... | 136 |
| | 10.11.3.2.1 | BCCH (D) data acquisition (AS side).. | 136 |
| | 10.11.3.2.2 | Other system data acquisition (AS side)..... | 137 |
| | 10.11.3.2.3 | Broadcast system information (GS side)..... | 137 |
| | 10.11.3.3 | Paging procedures..... | 138 |
| | 10.11.3.3.1 | Paging of a subscriber | 138 |
| | 10.11.3.3.2 | Engineering paging (ENGPAGE)..... | 139 |
| | 10.11.3.3.3 | Group broadcast | 140 |
| | 10.11.3.4 | RR connection establishment initiated by the AS..... | 140 |
| | 10.11.3.4.1 | Request for resources by the AS..... | 140 |
| | 10.11.3.4.2 | Answer from the GS..... | 141 |
| | 10.11.3.4.3 | Negotiation process..... | 141 |
| | 10.11.3.4.4 | Assignment completion | 141 |
| | 10.11.3.4.5 | Abnormal cases | 141 |
| | 10.11.3.4.6 | Remap Procedure for radio resource establishment..... | 142 |
| | 10.11.3.5 | RR-connection transfer phase..... | 142 |
| | 10.11.3.5.1 | Transfer of messages..... | 142 |
| | 10.11.3.5.2 | Handover procedure | 142 |
| | 10.11.3.5.3 | Additional channel assignment | 145 |
| | 10.11.3.5.4 | Release of assigned channels | 146 |
| | 10.11.3.6 | RR-connection release | 147 |
| | 10.11.3.6.1 | Normal release..... | 147 |
| | 10.11.3.7 | Alternative procedure | 147 |
| | 10.11.3.7.1 | General | 147 |
| | 10.11.3.7.2 | Radio link failure..... | 148 |
| | 10.11.3.7.3 | Ground network failure..... | 149 |
| | 10.11.3.7.4 | Remap failure..... | 149 |
| | 10.11.3.7.5 | Remap interruption | 149 |
| 10.11.4 | Elementary procedures for circuit-switched CC..... | | 149 |
| | 10.11.4.1 | Overview..... | 149 |
| | 10.11.4.1.1 | General | 149 |
| | 10.11.4.1.2 | CC states | 152 |
| | 10.11.4.1.3 | Circuit-switched CC procedures..... | 153 |
| | 10.11.4.2 | Aircraft originating call establishment procedures | 153 |
| | 10.11.4.2.1 | General | 153 |
| | 10.11.4.2.2 | Call request | 153 |
| | 10.11.4.2.3 | Invalid call information..... | 154 |
| | 10.11.4.2.4 | Call proceeding | 154 |
| | 10.11.4.2.5 | Notification of interworking in connection with call establishment..... | 155 |
| | 10.11.4.2.6 | Call confirmation indication | 155 |
| | 10.11.4.2.7 | Call connected | 156 |
| | 10.11.4.2.8 | Call rejection | 156 |
| | 10.11.4.3 | Signalling procedures during the active state..... | 156 |
| | 10.11.4.3.1 | User notification procedure..... | 156 |
| | 10.11.4.3.2 | Call rearrangements | 156 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/b576e8e8-00e0-42e5-8a71-ccc0d859d361/sist-ets-300-326-2-1999>

| | | | |
|-----------|---|--|-----|
| | 10.11.4.3.3 | Dual Tone Multi-Frequency protocol control procedure | 156 |
| 10.11.4.4 | Call clearing | | 158 |
| | 10.11.4.4.1 | Terminology | 158 |
| | 10.11.4.4.2 | Exception conditions | 158 |
| | 10.11.4.4.3 | Clearing initiated by the AS | 158 |
| | 10.11.4.4.4 | Clearing initiated by the GSS | 159 |
| | 10.11.4.4.5 | Clear collision | 160 |
| 10.11.4.5 | Miscellaneous procedures | | 161 |
| | 10.11.4.5.1 | In-band tones and announcements | 161 |
| | 10.11.4.5.2 | Status procedures | 161 |
| 10.11.5 | Elementary procedures for maintenance resource management | | 162 |
| 10.11.5.1 | Overview | | 162 |
| | 10.11.5.1.1 | General | 162 |
| 10.11.5.2 | GSS originated signalling procedures | | 163 |
| | 10.11.5.2.1 | General | 163 |
| | 10.11.5.2.2 | Paging | 163 |
| | 10.11.5.2.3 | Engineering paging | 164 |
| | 10.11.5.2.4 | Shutdown | 165 |
| | 10.11.5.2.5 | Operation and Maintenance (OM) | 165 |
| 10.11.6 | Handling of error conditions | | 169 |
| 10.11.6.1 | General | | 169 |
| 10.11.6.2 | Protocol discrimination error | | 169 |
| 10.11.6.3 | Message too short | | 169 |
| 10.11.6.4 | Transaction identifier error | | 169 |
| | 10.11.6.4.1 | Call control | 169 |
| | 10.11.6.4.2 | Radio resource | 169 |
| | 10.11.6.4.3 | MR | 169 |
| 10.11.6.5 | Message type error | | 169 |
| | 10.11.6.5.1 | Call control | 169 |
| | 10.11.6.5.2 | Radio resource | 170 |
| | 10.11.6.5.3 | MR | 170 |
| 10.11.6.6 | General information elements errors | | 170 |
| | 10.11.6.6.1 | Information element out of sequence | 170 |
| | 10.11.6.6.2 | Duplicated information element | 170 |
| 10.11.6.7 | Mandatory information element error | | 170 |
| | 10.11.6.7.1 | Call control | 170 |
| | 10.11.6.7.2 | Radio resource | 171 |
| 10.11.6.8 | Non-mandatory information element errors | | 171 |
| | 10.11.6.8.1 | Unrecognized information element | 171 |
| | 10.11.6.8.2 | Non-mandatory information element content error | 172 |
| 10.11.7 | Message functional definitions and contents | | 172 |
| 10.11.7.1 | Messages for RRM | | 173 |
| | 10.11.7.1.1 | Establish request | 173 |
| | 10.11.7.1.2 | Establish confirm | 174 |
| | 10.11.7.1.3 | Establish reject | 174 |
| | 10.11.7.1.4 | Handover command | 174 |
| | 10.11.7.1.5 | Handover request | 175 |
| | 10.11.7.1.6 | Handover reject | 175 |
| | 10.11.7.1.7 | Resource release request | 175 |
| | 10.11.7.1.8 | Resource release confirm | 176 |
| | 10.11.7.1.9 | Resource abort request | 176 |
| | 10.11.7.1.10 | Resource abort confirm | 176 |
| | 10.11.7.1.11 | Identity indication | 177 |
| | 10.11.7.1.12 | Handover failure | 177 |
| | 10.11.7.1.13 | Handover complete | 177 |
| | 10.11.7.1.13a | Group broadcast data transfer | 178 |
| | 10.11.7.1.14 | System Information type 1 | 178 |
| | 10.11.7.1.15 | System Information type 2 | 178 |

iTeh STANDARD PREVIEW
(standards.tch.ir)

SIST ETS 300 326-2:1999

<https://standards.tch.ir/catalog/standards/sist/15c6a8e8-00e0-42c5-8a71-ccc0d859d361/sist-ets-300-326-2-1999>

| | | | |
|---------------|--|--|-----|
| | 10.11.7.1.16 | System Information type 3 | 179 |
| | 10.11.7.1.17 | System Information type 4 | 179 |
| | 10.11.7.1.18 | System Information type 5 | 179 |
| | 10.11.7.1.19 | System Information type 6 | 180 |
| | 10.11.7.1.20 | System Information type 7 | 180 |
| | 10.11.7.1.21 | System Information type 8 | 181 |
| | 10.11.7.1.21a | System Information type 9 | 181 |
| | 10.11.7.1.22 | Status..... | 181 |
| 10.11.7.2 | Messages for circuit-mode connections CC | | 182 |
| | 10.11.7.2.1 | Alerting..... | 182 |
| | 10.11.7.2.2 | Call proceeding | 183 |
| | 10.11.7.2.3 | Connect..... | 183 |
| | 10.11.7.2.4 | Disconnect..... | 184 |
| | 10.11.7.2.5 | Notify..... | 184 |
| | 10.11.7.2.6 | Progress..... | 184 |
| | 10.11.7.2.7 | Release..... | 185 |
| | 10.11.7.2.8 | Release complete..... | 185 |
| | 10.11.7.2.9 | Setup | 186 |
| | 10.11.7.2.10 | Send DTMF | 186 |
| | 10.11.7.2.11 | Send DTMF acknowledge..... | 187 |
| | 10.11.7.2.12 | Send DTMF reject | 187 |
| | 10.11.7.2.13 | Status..... | 187 |
| | 10.11.7.2.14 | Status enquiry | 188 |
| 10.11.7.3 | Messages for MR management..... | | 188 |
| | 10.11.7.3.1 | ENGPAGE channel response | 188 |
| | 10.11.7.3.2 | ENGPAGE data transfer..... | 189 |
| | 10.11.7.3.3 | ENGPAGE channel release..... | 189 |
| | 10.11.7.3.4 | OM data transfer..... | 190 |
| | 10.11.7.3.5 | PAGE channel response | 190 |
| | 10.11.7.3.6 | PAGE data transfer..... | 190 |
| | 10.11.7.3.7 | PAGE channel release..... | 191 |
| | 10.11.7.3.8 | Status..... | 191 |
| 10.11.8 | General message format and information elements coding | | 191 |
| | 10.11.8.1 | Overview..... | 191 |
| | 10.11.8.2 | Protocol discriminator..... | 192 |
| | 10.11.8.3 | Transaction identifier..... | 193 |
| | 10.11.8.4 | Message type | 193 |
| | 10.11.8.5 | Other information elements..... | 195 |
| | 10.11.8.5.1 | Common information elements..... | 199 |
| | 10.11.8.5.2 | Radio resource management information elements..... | 199 |
| | 10.11.8.5.3 | Call control information elements | 219 |
| | 10.11.8.5.4 | MR information elements..... | 234 |
| 10.11.9 | List of system parameters..... | | 238 |
| | 10.11.9.1 | Timers of circuit-switched CC | 238 |
| | 10.11.9.2 | Timers and counters for RRM..... | 239 |
| | 10.11.9.2.1 | Timers on the GS side | 239 |
| | 10.11.9.2.2 | Timers on the AS side..... | 239 |
| | 10.11.9.2.3 | Counters on the AS side | 239 |
| | 10.11.9.2.4 | Counters on the GS side..... | 240 |
| | 10.11.9.3 | Timer values for MR management..... | 240 |
| | 10.11.9.3.1 | Timer values on AS side..... | 240 |
| | 10.11.9.3.2 | Timer values on GS side | 241 |
| 10.11.10 | Definition of primitive parameters..... | | 241 |
| 10.11.11 | SDL of TFTP layer 3 processes | | 242 |
| History | | | 302 |

Foreword

This second edition European Telecommunication Standard (ETS) has been produced by the Electromagnetic compatibility and Radio spectrum Matters (ERM) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS has been split into three parts as follows:

Part 1: "Speech services, facilities and requirements";

Part 2: "Speech services, radio interface";

Part 3: "Speech services, network aspects".

An ETSI Technical Report (TR) is in preparation for those manufacturers and/or system operators who require a defined interface between the Terrestrial Flight Telecommunications System (TFTS) Ground Station (GS) and TFTS Ground Switching Centre (GSC).

| Transposition dates | |
|---|-----------------|
| Date of adoption of this ETS: | 24 July 1998 |
| Date of latest announcement of this ETS (doa): | 31 October 1998 |
| Date of latest publication of new National Standard or endorsement of this ETS (dop/e): | 30 April 1999 |
| Date of withdrawal of any conflicting National Standard (dow): | 30 April 1999 |

Introduction

[SIST ETS 300 326-2:1999](https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-ccc0d859d361/sist-ets-300-326-2-1999)

[https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-](https://standards.iteh.ai/catalog/standards/sist/b5c6a8e8-00a0-42c5-8a71-ccc0d859d361/sist-ets-300-326-2-1999)

The TFTS Aircraft Station (AS) was specified by the European Airlines Electronics Committee (EAEC) and has subsequently been adopted as Aeronautical Radio Incorporated (ARINC) Characteristic 752 [4] by the Airlines Electronic Engineering Committee (AEEC).

ARINC Specification 752 [4] makes reference to this ETS for the specification of certain radio and telecommunication matters to avoid ambiguity. The TFTS AS is one of a set of facilities within an overall architecture being defined for aircraft on board telecommunications by the AEEC.