
**Industrial automation systems and
integration — Product data
representation and exchange —**

Part 235:

**Application protocol: Engineering
properties for product design and
verification**

iTeh STANDARD PREVIEW

(standards.iteh.ai)

*Systèmes d'automatisation industrielle et intégration — Représentation
et échange de données de produits —*

*Partie 235: Protocole d'application: Propriétés d'ingénierie pour la
conception de produits et vérification*



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 10303-235:2009

<https://standards.iteh.ai/catalog/standards/sist/b5c9fd02-c7c8-4c14-90c0-1b49f9f4afae/iso-10303-235-2009>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	x
Introduction	xi
1 Scope	1
2 Normative references	2
3 Terms and definitions	3
3.1 Terms defined in ISO 10303-1	3
3.2 Terms defined in ISO 10303-31	4
3.3 Terms defined in ISO 10303-45	4
3.4 Other terms and definitions	4
4 Information requirements	4
4.1 Units of functionality	5
4.1.1 activity UoF	5
4.1.2 adminstration UoF	6
4.1.3 approval UoF	6
4.1.4 condition UoF	7
4.1.5 document management UoF	7
4.1.6 effectivity UoF	8
4.1.7 external reference UoF	8
4.1.8 geometry UoF	9
4.1.9 geometric tolerance UoF	9
4.1.10 location UoF	10
4.1.11 measure UoF	10
4.1.12 person organisation UoF	11
4.1.13 product UoF	12
4.1.14 properties UoF	12
4.1.15 requirement UoF	13
4.1.16 state UoF	13
4.1.17 substance UoF	14
4.1.18 tolerance datum UoF	14
4.2 Application objects	15
4.2.1 Application objects for the activity UoF	15
4.2.2 Application objects for the adminstration UoF	20
4.2.3 Application objects for the approval UoF	30
4.2.4 Application objects for the condition UoF	35
4.2.5 Application objects for the document_management UoF	39
4.2.6 Application objects for the effectivity UoF	47
4.2.7 Application objects for the external reference UoF	54
4.2.8 Application objects for the geometry UoF	60
4.2.9 Application objects for the geometric_tolerance UoF	69
4.2.10 Application objects for the location UoF	75
4.2.11 Application objects for the measure UoF	80
4.2.12 Application objects for the person_organisation UoF	89
4.2.13 Application objects for the product UoF	95
4.2.14 Application objects for properties UoF	102
4.2.15 Application objects for the requirement UoF	109
4.2.16 Application objects for the state UoF	115
4.2.17 Application objects for the substance UoF	119
4.2.18 Application objects for the tolerance datum UoF	122
5 Application interpreted model	128
5.1 Mapping specification	128
5.1.1 Activity UoF	130
5.1.2 Adminstration UoF	135

5.1.3	Approval UoF	141
5.1.4	Condition UoF	146
5.1.5	Document management UoF	148
5.1.6	Effectivity UoF.....	156
5.1.7	External_reference UoF	162
5.1.8	Geometry UoF	171
5.1.9	Geometric tolerance UoF	177
5.1.10	Location UoF	183
5.1.11	Measure UoF	187
5.1.12	Person organisation UoF	193
5.1.13	Product UoF	199
5.1.14	Properties UoF	205
5.1.15	Requirements UoF	211
5.1.16	State UoF	217
5.1.17	Substance UoF.....	220
5.1.18	Tolerance datum UoF	224
5.2	AIM EXPRESS short-listing.....	230
5.2.1	Engineering properties for product design and validation type definitions	253
5.2.2	Engineering properties for product design and validation entity definitions	263
5.2.3	Engineering properties for product design and validation rule definitions	280
6	Conformance requirements.....	283
Annex A (normative)	AIM EXPRESS expanded listing	284
Annex B (normative)	AIM short names.....	528
Annex C (normative)	Implementation method specific requirements	548
Annex D (normative)	Protocol Implementation Conformance Statement (PICS) proforma.....	549
D.1	General.....	549
D.2	Protocol implementation identification	549
D.3	Implementation method	549
D.4	Implementation conformance classes	549
Annex E (normative)	Information object registration	550
E.1	Document identification.....	550
E.2	Schema identification.....	550
E.2.1	engineering_properties expanded schema	550
E.2.2	engineering_properties short form schema	550
Annex F (informative)	Application activity model	551
F.1	General.....	551
F.2	Application activity model definitions	551
F.3	Application activity model diagrams	563
Annex G (informative)	Application reference model.....	579
Annex H (informative)	AIM EXPRESS-G.....	598
Annex I (informative)	Computer interpretable listings	690
Bibliography	691
Index	692

Figures

Figure 1	— Processes for the measurement and approval of engineering properties.....	xiii
Figure 2	— Generic model for a process.....	xiv
Figure F.1	— Application Activity Model top level	564
Figure F.2	— Specification, design, analysis, test, manufacture, use and dispose of an actual product	565
Figure F.3	— Design, analyse and test a product	566

Figure F.4 — Develop and manage material property information	567
Figure F.5 — Procure and test material object.....	568
Figure F.6 — Reduce and evaluate data	569
Figure F.7 — Conduct product design, analysis and assessment.....	570
Figure F.8 — Conduct preliminary whole system and process design	571
Figure F.9 — Conduct component and process design and analysis.....	572
Figure F.10 — Verify product design.....	573
Figure F.11 — Conduct detail analysis	574
Figure F.12 — Generate response models	575
Figure F.13 — Generate environment model.....	576
Figure F.14 — Test product.....	577
Figure F.15 — Manufacture, use and dispose of an actual product	578
Figure G.1 — ARM EXPRESS-G diagram: activity UoF (1 of 18)	580
Figure G.2 — ARM EXPRESS-G diagram: administration UoF (2 of 18)	581
Figure G.3 — ARM EXPRESS-G diagram: approval UoF (3 of 18).....	582
Figure G.4 — ARM EXPRESS-G diagram: condition UoF (4 of 18)	583
Figure G.5 — ARM EXPRESS-G diagram: document UoF (5 of 18).....	584
Figure G.6 — ARM EXPRESS-G diagram: effectivity UoF (6 of 18)	585
Figure G.7 — ARM EXPRESS-G diagram: external_reference UoF (7 of 18)	586
Figure G.8 — ARM EXPRESS-G diagram: geometry UoF (8 of 18)	587
Figure G.9 — ARM EXPRESS-G diagram: geometric_tolerance UoF (9 of 18).....	588
Figure G.10 — ARM EXPRESS-G diagram: location UoF (10 of 18).....	589
Figure G.11 — ARM EXPRESS-G diagram: measure UoF (11 of 18)	590
Figure G.12 — ARM EXPRESS-G diagram: person_organisation UoF (12 of 18).....	591
Figure G.13 — ARM EXPRESS-G diagram: product UoF (13 of 18)	592
Figure G.14 — ARM EXPRESS-G diagram: properties UoF (14 of 18)	593
Figure G.15 — ARM EXPRESS-G diagram: requirements UoF (15 of 18)	594
Figure G.16 — ARM EXPRESS-G diagram: state UoF (16 of 18).....	595
Figure G.17 — ARM EXPRESS-G diagram: substance UoF (17 of 18).....	596
Figure G.18 — ARM EXPRESS-G diagram: tolerance_datum (18 of 18)	597

Figure H.1 — AIM EXPRESS-G diagram: common resources (1 of 91)..... 599

Figure H.2 — AIM EXPRESS-G diagram: date_time types (2 of 91)..... 600

Figure H.3 — AIM EXPRESS-G diagram: integer numbers (3 of 91) 601

Figure H.4 — AIM EXPRESS-G diagram: object_role (4 of 91)..... 602

Figure H.5 — AIM EXPRESS-G diagram: id_attribute (5 of 91) 603

Figure H.6 — AIM EXPRESS-G diagram: description_attribute (6 of 91)..... 604

Figure H.7 — AIM EXPRESS-G diagram: name_attribute (7 of 91) 605

Figure H.8 — AIM EXPRESS-G diagram: action (8 of 91)..... 606

Figure H.9 — AIM EXPRESS-G diagram: action_method (9 of 91)..... 607

Figure H.10 — AIM EXPRESS-G diagram: action_property and action_resource (10 of 91)..... 608

Figure H.11 — AIM EXPRESS-G diagram: action_request (11 of 91)..... 609

Figure H.12 — AIM EXPRESS-G diagram: application_context (12 of 91) 610

Figure H.13 — AIM EXPRESS-G diagram: approval (13 of 91)..... 611

Figure H.14 — AIM EXPRESS-G diagram: math_types (14 of 91)..... 612

Figure H.15 — AIM EXPRESS-G diagram: generic_expression (15 of 91) 613

Figure H.16 — AIM EXPRESS-G diagram: simple_generic_expression (16 of 91)..... 614

Figure H.17 — AIM EXPRESS-G diagram: unary_generic_expression (17 of 91)..... 615

Figure H.18 — AIM EXPRESS-G diagram: binary_generic_expression (18 of 91) 616

Figure H.19 — AIM EXPRESS-G diagram: multiple_arity_generic_expression (19 of 91)..... 617

Figure H.20 — AIM EXPRESS-G diagram: generic_literal_expression (20 of 91) 618

Figure H.21 — AIM EXPRESS-G diagram: generic_variable (21 of 91)..... 619

Figure H.22 — AIM EXPRESS-G diagram: expression (22 of 91)..... 620

Figure H.23 — AIM EXPRESS-G diagram: numeric_expression (23 of 91) 621

Figure H.24 — AIM EXPRESS-G diagram: boolean_expression (24 of 91) 622

Figure H.25 — AIM EXPRESS-G diagram: string_expression (25 of 91) 623

Figure H.26 — AIM EXPRESS-G diagram: document (26 of 91)..... 624

Figure H.27 — AIM EXPRESS-G diagram: defined_function (27 of 91)..... 625

Figure H.28 — AIM EXPRESS-G diagram: numeric_expressions (28 of 91) 626

Figure H.29 — AIM EXPRESS-G diagram: boolean_expressions (29 of 91) 627

Figure H.30 — AIM EXPRESS-G diagram: comparison_expression..... 628

iteh STANDARD PREVIEW
(standards.iteh.ai)

ISO 10303-235:2009
<https://standards.iteh.ai/catalog/standards/sist/1b49f94a-fae-iso-10303-235-2009>

Figure H.31 — AIM EXPRESS-G diagram: maths_variable (31 of 91).....	629
Figure H.32 — AIM EXPRESS-G diagram: maths_literal (32 of 91).....	630
Figure H.33 — AIM EXPRESS-G diagram: maths_space (33 of 91).....	631
Figure H.34 — AIM EXPRESS-G diagram: maths_spaces (34 of 91).....	632
Figure H.35 — AIM EXPRESS-G diagram: maths_function (35 of 91).....	633
Figure H.36 — AIM EXPRESS-G diagram: explicit_table_function (36 of 91)	634
Figure H.37 — AIM EXPRESS-G diagram: maths_functions_1 (37 of 91).....	635
Figure H.38 — AIM EXPRESS-G diagram: maths_functions_2 (38 of 91).....	636
Figure H.39 — AIM EXPRESS-G diagram: external_item (39 of 91)	637
Figure H.40 — AIM EXPRESS-G diagram: imported_function (40 of 91)	638
Figure H.41 — AIM EXPRESS-G diagram: geometric_representation_item (41 of 91)	639
Figure H.42 — AIM EXPRESS-G diagram: placement (42 of 91)	640
Figure H.43 — AIM EXPRESS-G diagram: point (43 of 91).....	641
Figure H.44 — AIM EXPRESS-G diagram: curve (44 of 91).....	642
Figure H.45 — AIM EXPRESS-G diagram: surface (45 of 91)	643
Figure H.46 — AIM EXPRESS-G diagram: volume (46 of 91).....	644
Figure H.47 — AIM EXPRESS-G diagram: certification (47 of 91).....	645
Figure H.48 — AIM EXPRESS-G diagram: contract (48 of 91)	646
Figure H.49 — AIM EXPRESS-G diagram: date_and_time_entities (49 of 91).....	647
Figure H.50 — AIM EXPRESS-G diagram: time_interval (50 of 91).....	648
Figure H.51 — AIM EXPRESS-G diagram: event_occurrence (51 of 91)	649
Figure H.52 — AIM EXPRESS-G diagram: event_occurrence (51 of 91)	650
Figure H.53 — AIM EXPRESS-G diagram: group (53 of 91).....	651
Figure H.54 — AIM EXPRESS-G diagram: language_assignment (54 of 91).....	652
Figure H.55 — AIM EXPRESS-G diagram: attribute_language_assignment (55 of 91).....	653
Figure H.56 — AIM EXPRESS-G diagram: location (56 of 91).....	654
Figure H.57 — AIM EXPRESS-G diagram: material_property (57 of 91).....	655
Figure H.58 — AIM EXPRESS-G diagram: material_property_representation (58 of 91).....	656
Figure H.59 — AIM EXPRESS-G diagram: SI_unit and derived_unit (59 of 91)	657
Figure H.60 — AIM EXPRESS-G diagram: measure_with_unit (60 of 91).....	658

Figure H.61 — AIM EXPRESS-G diagram: measure_value (61 of 91)..... 659

Figure H.62 — AIM EXPRESS-G diagram: named_unit 660

Figure H.63 — AIM EXPRESS-G diagram:address (63 of 91)..... 661

Figure H.64 — AIM EXPRESS-G diagram: organization (64 of 91)..... 662

Figure H.65 — AIM EXPRESS-G diagram: organizational_project (65 of 91) 663

Figure H.66 — AIM EXPRESS-G diagram: person (66 of 91) 664

Figure H.67 — AIM EXPRESS-G diagram: qualification_type (67 of 91) 665

Figure H.68 — AIM EXPRESS-G diagram: property_process (68 of 91) 666

Figure H.69 — AIM EXPRESS-G diagram: resource_property (69 of 91) 667

Figure H.70 — AIM EXPRESS-G diagram: product (70 of 91) 668

Figure H.71 — AIM EXPRESS-G diagram: product_category and configuration_design (71 of 91) 669

Figure H.72 — AIM EXPRESS-G diagram: product_definition (72 of 91) 670

Figure H.73 — AIM EXPRESS-G diagram: property_definition and shape_aspect (73 of 91) 671

Figure H.74 — AIM EXPRESS-G diagram: characterized_object (74 of 91) 672

Figure H.75 — AIM EXPRESS-G diagram: general_property (75 of 91) 673

Figure H.76 — AIM EXPRESS-G diagram: property_definition_representation (76 of 91) 674

Figure H.77 — AIM EXPRESS-G diagram: shape_representation and item_identified_representation_usage (77 of 91) 675

Figure H.78 — AIM EXPRESS-G diagram: measure_qualification (78 of 91) 676

Figure H.79 — AIM EXPRESS-G diagram: representation (79 of 91) 677

Figure H.80 — AIM EXPRESS-G diagram: representation_item (80 of 91) 678

Figure H.81 — AIM EXPRESS-G diagram: representation_context (81 of 91)..... 679

Figure H.82 — AIM EXPRESS-G diagram: security_classification (82 of 91) 680

Figure H.83 — AIM EXPRESS-G diagram: tolerance_datum (83 of 91) 681

Figure H.84 — AIM EXPRESS-G diagram: geometric_tolerance_with_datum (84 of 91) 682

Figure H.85 — AIM EXPRESS-G diagram: geometric_tolerance (85 of 91)..... 683

Figure H.86 — AIM EXPRESS-G diagram: tolerance_zone_definition (86 of 91) 684

Figure H.87 — AIM EXPRESS-G diagram: tolerance_value (87 of 91)..... 685

Figure H.88 — AIM EXPRESS-G diagram: dimensional_location and dimensional_size (88 of 91)..... 686

Figure H.89 — AIM EXPRESS-G diagram: state_type (89 of 91)..... 687

STANDARD PREVIEW
(standards.iteh.ai)

ISO 10303-235:2009
<https://standards.iteh.ai/catalog/standards/iso-10303-235-2009>
1b49f94afae/iso-10303-235-2009

Figure H.90 — AIM EXPRESS-G diagram: state_observed (90 of 91)688
Figure H.91 — AIM EXPRESS-G diagram: multi_language_attribute_item (91 of 91).....689

Tables

Table B.1 — Short names of entities specified in the AIM of this part of ISO 10303.....528

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 10303-235:2009](https://standards.iteh.ai/catalog/standards/sist/b5c9fd02-c7c8-4c14-90c0-1b49f9f4afae/iso-10303-235-2009)

<https://standards.iteh.ai/catalog/standards/sist/b5c9fd02-c7c8-4c14-90c0-1b49f9f4afae/iso-10303-235-2009>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 10303-235 was prepared by Technical Committee ISO/TC 184, *Automation systems and integration*, Subcommittee SC 4, *Industrial data*.

ISO 10303 is organized as a series of parts, each published separately. The structure of ISO 10303 is described in ISO 10303-1.

Each part of ISO 10303 is a member of one of the following series: descriptive methods, implementation methods, conformance testing methodology and framework, integrated generic resources, integrated application resources, application protocols, abstract test suites, application interpreted constructs and application modules. This part of ISO 10303 is a member of the application protocols series.

A complete list of the parts of ISO 10303 is available from the Internet:

http://www.tc184-sc4.org/titles/STEP_titles.htm .

Introduction

ISO 10303 is an International Standard for the computer-interpretable representation of product information and for the exchange of product data. The objective is to provide a neutral mechanism capable of describing products throughout their life cycle. This mechanism is suitable not only for neutral file exchange, but also as a basis for implementing and sharing product databases, and as a basis for archiving.

This part of ISO 10303 is a member of the application protocol series. This part of ISO 10303 specifies an application protocol (AP) for those properties of products that can be used for product design and design validation.

This application protocol defines the context, scope, and information requirements for properties of products that can be used for product design and design validation, the testing, measurement and approval processes used to determine those properties and specifies the integrated resources necessary to satisfy these requirements.

Application protocols provide the basis for developing implementations of ISO 10303 and abstract test suites for the conformance testing of AP implementations.

Clause 1 defines the scope of this part of ISO 10303 and summarizes the functionality and data covered by this part of ISO 10303. Clause 3 lists the words defined in this part of ISO 10303 and gives pointers to words defined elsewhere. An application activity model that is the basis for the definition of the scope is provided in Annex F. The information requirements for the application are specified in Clause 4, using terminology appropriate to the application. A graphical representation of the information requirements, referred to as the application reference model, is given in Annex G.

Resource constructs are interpreted to meet the information requirements of this application and produce the application interpreted model (AIM). This interpretation, given in 5.1, shows the correspondence between the information requirements and the AIM. The short-listing of the AIM specifies the interface to the integrated resources and is given in 5.2. Note that the definitions and EXPRESS provided in the integrated resources for constructs used in the AIM can include items in select lists and subtypes that are not imported into the AIM. The expanded listing given in Annex A contains the complete EXPRESS for the AIM without annotation. A graphical representation of the AIM is given in Annex H. Additional requirements for specific implementation methods are given in Annex C.

Engineering properties, which include materials properties, are not fundamental constants derived from physical or chemical laws. The value of an engineering property of a product is dependent on the process used to measure the property value and on the conditions used in that process.

If properties that are based on fundamental physical or chemical behaviour, such as latent heat or melting temperature, are measured by different methods, then the results obtained are usually sufficiently similar to be regarded as a single value. A method used for measuring an engineering property attempts to simulate the behaviour of a product in an engineering situation in the real world. Each aspect of behaviour, for example the hardness of a product, can be simulated by several different methods. The methods are usually designed to be convenient to use and to provide a consistent result from repeated measurements. However, the difference between physical or chemical properties of a substance and the engineering properties of a product is that if different methods are used to measure an engineering property, then different results are obtained. For example, the measurement of the elongation property attempts to provide a numerical value to represent the engineering concept of plastic ductility by stretching a specially shaped sample of a product by applying a uniaxial tensile load. The value of the elongation property is determined as a percentage of the original length of a portion of a sample piece of the product. Comparisons between values of the elongation property for

different products are therefore only possible if the fixed length was the same for each case. It is therefore necessary to state this length explicitly for all values of the elongation property.

An engineering property is therefore the result from operating a specific test method in a specific manner and it is necessary to associate the value of an engineering property with the conditions in which it is valid, in order for the meaning of the value to be explicitly determined. This additional information is called the data environment in ISO 10303-45. An alternative term that is often used is metadata, i.e. data about data.

In most communications of engineering data, the relationship of a property value to its data environment or metadata is often an implicit assumption and it might not be explicitly associated with the value. The purpose of this part of ISO 10303 is to provide the means to associate a property value explicitly to the conditions in which it was measured, and thus provide an audit trail to the origins of data values that can be used in product design.

In order to measure the properties of a product, it is sometimes, but not always, possible to test the whole product. Accordingly, a sample of a product can be taken to represent the bulk of the product and the procedure for taking this sample can be specified in some regulatory document, such as a quality manual, or in a standard. The operation of the testing apparatus and the measurement procedure can require that the item that is tested has a specific shape and dimensions, and it will be necessary to create this from the product sample by some manufacturing process. The result of this process can be called a test piece. The specific shape and dimensions of test pieces can also be defined in standards or other regulatory documents. The measurement of the engineering property is then carried out on the test piece by means of some measuring apparatus or testing machine, whose operation might have to be controlled to be within specified limits. Manufactured products can be assemblies or single products, but they are rarely homogenous or isotropic in their properties, and so it is necessary to know the relationships between the test piece, the sample and the original product if the results of the measurement are to be related to the original product.

Data produced by a testing or measurement process is rarely used in its original form. It is necessary to first evaluate data values by some process in order to determine if the conditions prescribed for a particular test method have been met. For many properties, such as fracture toughness as an example, the validity of a test result can only be determined by an evaluation process after all the measurements have been completed and the process is specified in the standard that describes how to make the measurement. Data values are rarely used as single values, but can be combined or processed in some way to provide a collective result that is indicative of the results of a series of measurements. It is necessary to identify the central value of the collection and to provide the uncertainty associated with this value.

The validity of a test result can be established by an approval procedure which results in the issue of a certificate. The certificate affirms that the original product from which the sample was taken conforms to a particular requirement or specification, and that the tests used to determine this were carried out in an approved manner. The data obtained from a valid test can also be subject to a further approval procedure that confirms the suitability of property values for the design of a functional product. This procedure will use criteria for the approval based on the requirements that the product has to satisfy. The approval process and the criteria can be established and administered by an independent regulatory body or authority.

Test data values are not used for design because they often represent a condition of failure of the test piece. Design values are derived from the test data to represent a condition in which it is safe to use the product, and it is also advisable to record explicitly the procedures by which a design value is derived. Further testing can be required to measure the design values.

The number of different engineering properties and test methods is too large for every property and test method to be included in this part of ISO 10303. There are also differences in test methods, and therefore differences in the engineering meaning of the properties, between different national engineering systems. Provision has therefore been made for the names of test methods and their association with particular properties to be defined in computer-processable dictionaries conforming to ISO 13584 Parts Libraries, or defined in a referenced document. An entry in such a dictionary can be referenced from the information model in this part of ISO 10303, in order to make use of a particular property name associated with a particular measurement method.

The benefit of this approach is that, with appropriate dictionaries to define test methods and their relevant property names, this part of ISO 10303 can be used for the representation of any engineering property measured by any method, provided that those methods and properties are defined in a computer-processable

dictionary. The application of this part of ISO 10303 therefore extends to other engineering domains and is not restricted to materials. Other applications could include the results of measurements of environmental data, for example.

Figure 1 shows a high-level view of the concept of this part of ISO 10303. Figure 2 shows the high-level view of a process. Further information on the application of product data technology to materials information, as examples of engineering properties, can be found in Reference [13] in the Bibliography.


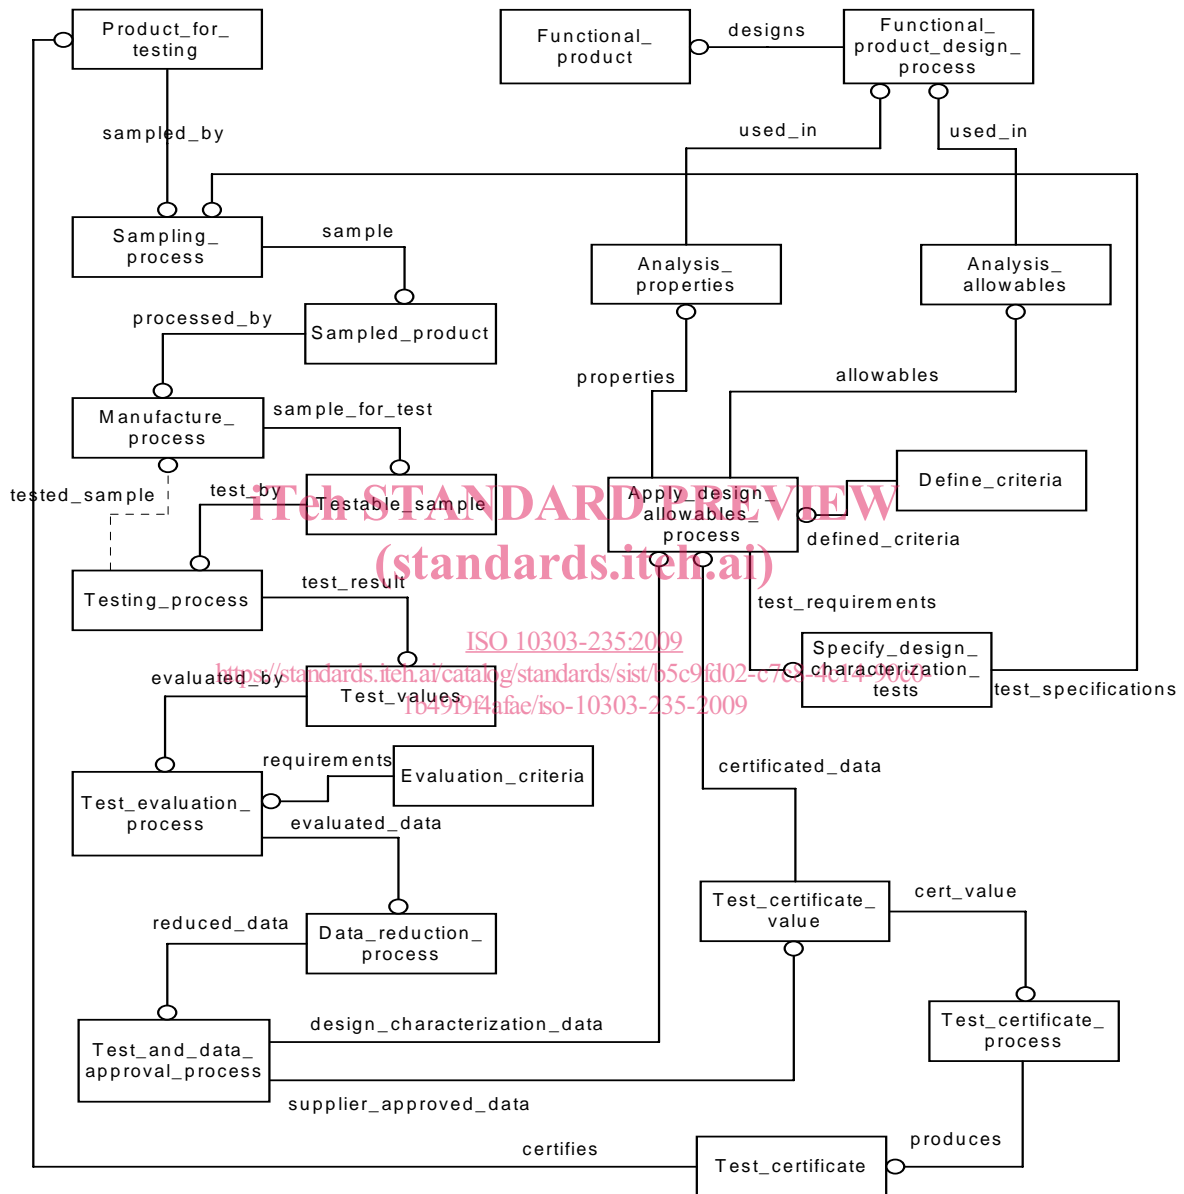


Figure 1 — Processes for the measurement and approval of engineering properties

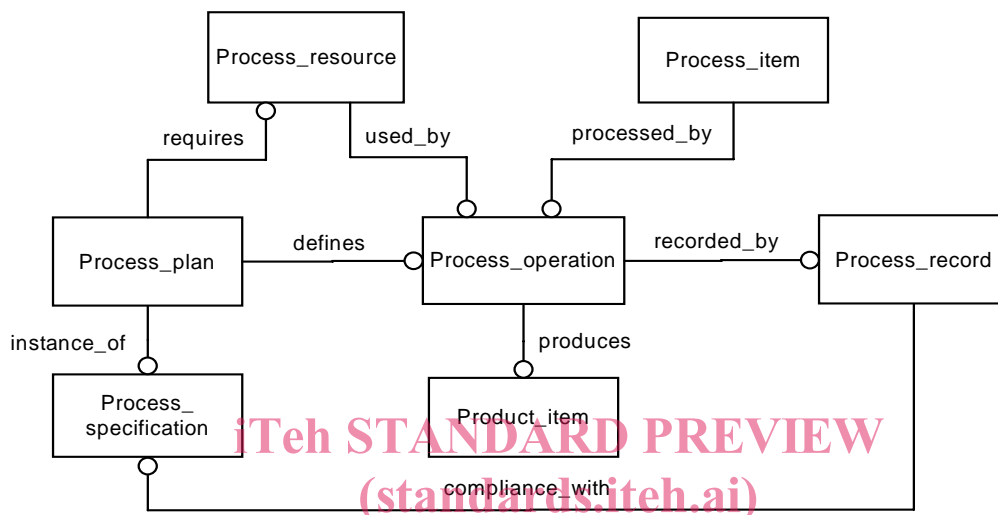

ISO 10303-235:2009
<https://standards.iteh.ai/catalog/standards/sist/b5c9fd02-c7c8-4c14-90c0-1b49f9f4afae/iso-10303-235-2009>

Figure 2 — Generic model for a process

Industrial automation systems and integration — Product data representation and exchange —

Part 235:

Application protocol: Engineering properties for product design and verification

1 Scope

This part of ISO 10303 specifies the use of the integrated resources necessary for the scope and information requirements for the representation of engineering property data that are used for product design and product validation.

NOTE 1 The application activity model in Annex F provides a graphical representation of the processes and information flows that are the basis for the definition of the scope of this part of ISO 10303.

The following are within the scope of this part of ISO 10303:

- descriptions and definitions of the manufactured product, the sample of the product and the testable version of the sample;
- description of the composition and substance of the product;
- description of the processes used in the measurement;
- descriptions of the data values produced by the measurement, with the specification of the conditions in which the data is valid;
- references to standards and other documents wherein sampling, measurement and other details of testing and measurement processes can be specified or described;
- descriptions and qualifications of the personnel and or organizations responsible for the measurement;
- specification of the requirements, conditions and tolerances to be satisfied in the measurement and a description of the outcome;
- descriptions of the locations of the measurement process and the effectivity of the results;
- descriptions of the approval that establishes the validity of the measurements and the use of the properties for product design and design validation.

NOTE 2 Data representations described in this part of ISO 10303 might need to be archived to meet legal and regulatory requirements and to meet quality objectives.

The following are outside the scope of this part of ISO 10303:

- data describing rules, guidelines and expert knowledge in the testing of products;
- names of properties and test methods;
- data describing why a decision was made to use a particular process;