



SLOVENSKI STANDARD SIST ETS 300 536 E4:2003

01-december-2003

8 [[[HJb]`WV] b]`HY`Y_ca i b]_UW`g_]`g]ghYa `fZuU&L`E`HY b] bUfYU]nUW]Ugkcf]HYj
fUh]`gdcfc]`fGAGL`hc _Uhc _UfDDL`f] GA `\$' `(\$L

Digital cellular telecommunications system (Phase 2) (GSM); Technical realization of Short Message Service (SMS) Point-to-Point (PP) (GSM 03.40)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ETS 300 536 Edition 4**
SIST ETS 300 536 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/58b70ebf-680a-4eb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--


SIST ETS 300 536 E4:2003

en

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

SIST ETS 300 536 E4:2003

<https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

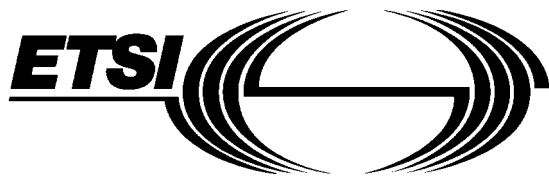

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 536

October 1996

Fourth Edition

Source: ETSI TC-SMG

Reference: RE/SMG-040340PR4

ICS: 33.060.50

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



**GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS**
(standards.iteh.ai)

**Digital cellular telecommunications system (Phase 2);
Technical realization of the Short Message Service (SMS)
Point-to-Point (PP)
(GSM 03.40)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 536 E4:2003](https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

Contents

Foreword	7
Introduction.....	7
1 Scope.....	9
2 Normative references.....	9
2.1 Definitions and abbreviations	10
2.1.1 Definitions	11
2.2.2 Abbreviations	13
3 Services and service elements.....	13
3.1 Basic services.....	14
3.2 Short Message Service elements.....	15
3.2.1 Validity-Period.....	15
3.2.2 Service-Centre-Time-Stamp	15
3.2.3 Protocol-Identifier	15
3.2.4 More-Messages-to-Send	15
3.2.5 Delivery of Priority and non-Priority Messages	16
3.2.6 Messages-Waiting.....	16
3.2.7 Alert SC.....	18
3.2.8 Options concerning MNRF, MCEF and MWD.....	18
3.2.9 Status report capabilities.....	19
3.2.10 Reply Path	19
3.3 Unsuccessful short message TPDU transfer SC -> MS.....	20
3.3.1 Errors occurring during transfer of TPDU to MS.....	20
3.3.2 Errors occurring after TPDU arrives at MS	20
3.4 Unsuccessful short message TPDU transfer MS -> SC.....	22
3.4.1 Errors occurring during transfer of TPDU to SC.....	22
3.4.2 Errors occurring after TPDU arrives at SC.....	22
3.5 Use of Supplementary Services in combination with the Short Message Service	22
3.6 Applicability of Operator Determined Barring to the Short Message Service.....	22
3.7 Multiple short message transfer.....	22
4 Network architecture.....	23
4.1 Basic network structure	23
4.2 Transfer on link 3.....	24
5 Service Centre and PLMN interconnection	24
5.1 Service centre connection	24
5.2 Routing requirements.....	24
5.2.1 Mobile terminated short message	24
5.2.2 Mobile originated short message	24
6 Service Centre functionality	25
6.1 Service Centre capabilities	25
6.2 SC functional requirements.....	25
7 MS functionality	26
7.1 MS capabilities.....	26
7.2 MS configuration	26
8 MSC functionality.....	27
8.1 MSC functionality related to SM MT.....	27

8.1.1	Functionality of the SMS-GMSC.....	27
8.1.2	Functionality of the MSC.....	28
8.2	MSC functionality related to SM MO	28
8.2.1	Functionality of the MSC.....	28
8.2.2	Functionality of the SMS-IWMSC	29
8.3	SMS-IWMSC functionality related to alerting.....	29
9	Protocols and protocol architecture	30
9.1	Protocol element features	30
9.1.1	Octet and Bit transmission order.....	30
9.1.2	Numeric and alphanumeric representation	30
9.1.2.1	Integer representation	30
9.1.2.2	Octet representation	31
9.1.2.3	Semi-octet representation.....	31
9.1.2.4	Alphanumeric representation	32
9.1.2.5	Address fields.....	32
9.2	Service provided by the SM-TL.....	34
9.2.1	General.....	34
9.2.2	PDU Type repertoire at SM-TL	34
9.2.2.1	SMS-DELIVER type.....	35
9.2.2.1a	SMS-DELIVER-REPORT type	37
9.2.2.2	SMS-SUBMIT type.....	38
9.2.2.2a	SMS-SUBMIT-REPORT type.....	40
9.2.2.3	SMS-STATUS-REPORT type	41
9.2.2.4	SMS-COMMAND type.....	43
9.2.3	Definition of the TPDU parameters	45
9.2.3.1	TP-Message-Type-Indicator (TP-MTI)	45
9.2.3.2	TP-More-Messages-to-Send (TP-MMS)	45
9.2.3.3	TP-Validity-Period-Format (TP-VPF)	45
9.2.3.4	TP-Status-Report-Indication (TP-SRI).....	45
9.2.3.5	TP-Status-Report-Request (TP-SRR).....	46
9.2.3.6	TP-Message-Reference (TP-MR).....	46
9.2.3.7	TP-Originating-Address (TP-OA).....	46
9.2.3.8	TP-Destination-Address (TP-DA).....	46
9.2.3.9	TP-Protocol-Identifier (TP-PID)	46
9.2.3.10	TP-Data-Coding-Scheme (TP-DCS)	48
9.2.3.11	TP-Service-Centre-Time-Stamp (TP-SCTS)	48
9.2.3.12	TP-Validity-Period.....	49
9.2.3.13	TP-Discharge-Time (TP-DT)	49
9.2.3.14	TP-Recipient-Address (TP-RA)	49
9.2.3.15	TP-Status (TP-ST)	49
9.2.3.16	TP-User-Data-Length (TP-UDL)	51
9.2.3.17	TP-Reply-Path (TP-RP).....	51
9.2.3.18	TP-Message-Number (TP-MN).....	51
9.2.3.19	TP-Command-Type (TP-CT).....	51
9.2.3.20	TP-Command-Data-Length (TP-CDL).....	52
9.2.3.21	TP-Command-Data (TP-CD).....	52
9.2.3.22	TP-Failure-Cause (TP-FCS).....	53
9.2.3.23	TP-User-Data-Header-Indicator (TP-UDHI)	54
9.2.3.24	TP-User Data (TP-UD)	54
9.2.3.24.1	Concatenated Short Messages	56
9.2.3.25	TP-Reject-Duplicates (TP-RD)	57
9.2.3.26	TP-Status-Report-Qualifier (TP-SRQ).....	57
9.3	Service provided by the SM-RL	57
9.3.1	General.....	57
9.3.2	Protocol element repertoire at SM-RL	58
9.3.2.1	RP-MO-DATA.....	58
9.3.2.2	RP-MT-DATA	59
9.3.2.3	RP-ACK	59
9.3.2.4	RP-ERROR	59

ETS 300 536: October 1996 (GSM 03.40 version 4.13.0)

9.3.2.5	RP-ALERT-SC.....	60
9.3.2.6	RP-SM-MEMORY-AVAILABLE.....	60
10	Fundamental procedures within the point-to-point SMS.....	61
10.1	Short message mobile terminated.....	61
10.2	Short message mobile originated.....	72
10.3	Alert transfer.....	78
11	Mapping of error causes between RP layers	82
11.1	Mobile Terminated short message transfer.....	82
11.2	Memory available notification.....	82
11.3	Mobile Originated short message transfer	83
Annex A (Informative):	Protocol stacks for interconnecting SCs and MSCs.....	84
Annex B (Informative):	Information now contained in GSM 03.38	85
Annex C (Informative):	Short message information flow.....	86
Annex D (Informative):	Mobile Station reply procedures	103
D.1	Introduction	103
D.2	The scope of applicability	103
D.3	Terminology	103
D.4	The reply path requesting procedure.....	104
D.5	The reception of an original MT SM.....	104
D.6	The submission of the reply MO SM.....	104
D.7	Usage of SCs for replying	105
D.8	Replying possibilities for phase 1 mobile stations	105
D.9	The resulting service for originating SMEs	105
History	106

STANDARD PREVIEW
(standards.iteh.ai)

SIST ETS 300 536 E4:2003
<https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 536 E4:2003](https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

Foreword

This fourth edition European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS defines the technical realization of the Point-to-Point (PP) Short Message Service (SMS) for the Digital cellular telecommunications system (Phase 2).

This ETS corresponds to GSM technical specification GSM 03.40 version 4.13.0.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE rules.

Reference is made within this draft ETS to GSM-TSs (NOTE).

NOTE: TC-SMG has produced documents which give the technical specifications for the implementation of the Digital cellular telecommunications system. Historically, these documents have been identified as GSM Technical Specifications (GSM-TSs). These TSs may have subsequently become I-ETSS (Phase 1), or ETSS (Phase 2), whilst others may become ETSI Technical Reports (ETRs). GSM-TSs are, for editorial reasons, still referred to in current GSM ETSS.

Transposition dates	
Date of adoption of this ETS:	4 October 1996
Date of latest announcement of this ETS (doa):	31 January 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 July 1997
Date of withdrawal of any conflicting National Standard (dow):	31 July 1997

Introduction

The Point-to-Point Short Message Service (SMS) provides a means of sending messages of limited size to and from GSM mobiles. The provision of SMS makes use of a Service Centre, which acts as a store and forward centre for short messages. Thus a GSM PLMN needs to support the transfer of short messages between Service Centres and mobiles.

Two different point-to-point services have been defined: mobile originated and mobile terminated. Mobile originated messages will be transported from an MS to a Service Centre. These may be destined for other mobile users, or for subscribers on a fixed network. Mobile terminated messages will be transported from a Service Centre to an MS. These may be input to the Service Centre by other mobile users (via a mobile originated short message) or by a variety of other sources, e.g. speech, telex, or facsimile.

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 536 E4:2003](https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/38b70ebf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

1 Scope

This European Telecommunication Standard (ETS) describes the point-to-point Short Message Service (SMS) of the GSM PLMN system. It defines:

- the services and service elements;
- the network architecture;
- the Service Centre functionality;
- the MSC functionality (with regard to the SMS);
- the routing requirements,
- the protocols and protocol layering;

for the Teleservices 21 and 22, as specified in the GSM 02.03 (ETS 300 502).

The use of radio resources for the transfer of short messages between the MS and the MSC is described in GSM 04.11 (ETS 300 559) 'Point-to-Point Short Message Service Support on Mobile Radio Interface', and is dealt with in that specification.

The network aspects of Short Message Service provision are outside the scope of this specification (i.e. the provision of network connectivity between the PLMN subsystems). The required and assumed network service offered to the higher layers is defined in this specification.

The Cell Broadcast Short Message Service (Teleservice 23) is a separate service, and is described in GSM 03.41 (ETS 300 537) 'Technical Realization of the Short Message Service - Cell Broadcast'.

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 100): "Digital cellular telecommunication system (Phase 2); Abbreviations and acronyms".
- [2] GSM 02.03 (ETS 300 502): "Digital cellular telecommunication system (Phase 2); Teleservices supported by a GSM Public Land Mobile Network (PLMN)".
- [3] GSM 02.04 (ETS 300 503): "Digital cellular telecommunication system (Phase 2); General on supplementary services".
- [4] GSM 02.41 (ETS 300 513): "Digital cellular telecommunication system (Phase 2); Operator determined barring".
- [5] GSM 03.02 (ETS 300 522): "Digital cellular telecommunication system (Phase 2); Network architecture".
- [6] GSM 03.08 (ETS 300 526): "Digital cellular telecommunication system (Phase 2); Organisation of subscriber data".
- [7] GSM 03.11 (ETS 300 529): "Digital cellular telecommunication system (Phase 2); Technical realization of supplementary services".
- [8] GSM 03.15 (ETS 300 533): "Digital cellular telecommunication system (Phase 2); Technical realization of operator determined barring".
- [9] GSM 03.38 (ETS 300 628): "Digital cellular telecommunication system (Phase 2); Alphabets and language-specific information".

- [10] GSM 03.41 (ETS 300 537): "Digital cellular telecommunication system (Phase 2); Technical realization of Short Message Service Cell Broadcast (SMSCB)".
- [11] GSM 03.47 (ETR 106): "Digital cellular telecommunication system (Phase 2); Example protocol stacks for interconnecting Service Centre(s) (SC) and Mobile-services Switching Centre(s) (MSC)".
- [12] GSM 04.08 (ETS 300 557): "Digital cellular telecommunication system (Phase 2); Mobile radio interface layer 3 specification".
- [13] GSM 04.11 (ETS 300 559): "Digital cellular telecommunication system (Phase 2); Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".
- [14] GSM 07.05 (ETS 300 585): "Digital cellular telecommunication system (Phase 2); Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)".
- [15] GSM 09.02 (ETS 300 599): "Digital cellular telecommunication system (Phase 2); Mobile Application Part (MAP) specification".
- [16] GSM 11.11 (ETS 300 608): "Digital cellular telecommunication system (Phase 2); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [17] CCITT Recommendation E.164 (Blue Book): "Numbering plan for the ISDN era".
- [18] CCITT Recommendation E.163 (Blue Book): "Numbering plan for the international telephone service".
- [19] CCITT Recommendation Q.771: "Specifications of Signalling System No.7; Functional description of transaction capabilities".
- [20] CCITT Recommendation T.100 (Blue Book): "International information exchange for interactive videotex".
- [21] CCITT Recommendation T.101 (Blue Book): "International interworking for videotex services".
- [22] CCITT Recommendation X.121 (Blue Book): "International numbering plan for public data networks".
- [23] CCITT Recommendation X.400 (Blue Book): "Message handling system and service overview".

2.1 Definitions and abbreviations

NOTE: Use of hyphens and full stops:

Care is needed when reading this specification as names containing words separated by hyphens have different meaning than when separated with full stops. E.g. TS-Status-Report-Request is a parameter within a TS-Submit primitive, whilst TS-Status-Report-Request is a primitive in its own right.

2.1.1 Definitions

Active MS: A switched-on mobile station with a SIM module attached.

Alert-SC: Service element provided by a GSM PLMN to inform an SC which has previously initiated unsuccessful short message delivery attempt(s) to a specific MS, that the MS is now recognized by the PLMN to have recovered operation.

Status Report: SC informing the originating MS of the outcome of a short message submitted to an SME.

Gateway MSC for Short Message Service (SMS-GMSC): A function of an MSC capable of receiving a short message from an SC, interrogating an HLR for routing information and SMS info, and delivering the short message to the VMSC of the recipient MS.

Interworking MSC for Short Message Service (SMS-IW MSC): A function of an MSC capable of receiving a short message from within the PLMN and submitting it to the recipient SC.

Messages-Waiting (MW): Service element that makes a PLMN store information (Messages-Waiting-Indication), listing those SCs that have made unsuccessful short message delivery attempts to MSs in that PLMN.

Messages-Waiting-Indication (MWI): Data to be stored in the HLR and VLR with which an MS is associated, indicating that there is one or more messages waiting in a set of SCs to be delivered to the MS (due to unsuccessful delivery attempt(s)).

Messages-Waiting-Data (MWD): A part of the MWI to be stored in the HLR. MWD consists of an address list of the SCs which have messages waiting to be delivered to the MS.

Mobile-Station-Memory-Capacity-Exceeded-Flag (MCEF): A part of the MWI to be stored in the HLR. MCEF is a boolean parameter indicating if the address list of MWD contains one or more entries because an attempt to deliver a short message to an MS has failed with a cause of MS Memory Capacity Exceeded.

<https://standards.iteh.ai/catalog/standards/sist/38b70cbf-680a-4cb9-be5b-e0421a02829e/sist-ets-300-536-e4-2003>

Mobile-Station-Not-Reachable-Flag (MNRF): The part of the MWI to be stored in the VLR and the HLR. MNRF is a boolean parameter indicating if the address list of MWD contains one or more entries because an attempt to deliver a short message to an MS has failed with a cause of Absent Subscriber.

More-Messages-to-Send (MMS): Information element offering an MS receiving a short message from an SC the information whether there are still more messages waiting to be sent from that SC to the MS.

Priority: Service element enabling the SC or SME to request a short message delivery attempt to an MS irrespective of whether or not the MS has been identified as temporarily absent.

Protocol-Identifier: Information element by which the originator of a short message (either an SC or an MS) may refer to a higher layer protocol.

Reply Path Procedure: A mechanism which allows an SME to request that an SC should be permitted to handle a reply sent in response to a message previously sent from that SME to another SME. This may happen even though the SC may be unknown to the SME which received the initial message.

Report: Response from either the network or the recipient upon a short message being sent from either an SC or an MS. A report may be a **delivery report**, which confirms the delivery of the short message to the recipient, or it may be a **failure report**, which informs the originator that the short message was never delivered and the reason why.

When issued by the Service Centre, the delivery report confirms the reception of the Short Message by the SC, and not the delivery of the Short Message to the SME.

When issued by the Mobile Station, the delivery report confirms the reception of the Short Message by the Mobile Station, and not the delivery of the Short Message to the user.

Replace Short Message Type: A range of values in the Protocol Identifier which allows an indication to be sent with a short message (MT or MO) that the short message is of a particular type allowing the receiving MS or the SC to replace an existing message of the same type held in the SC, the ME or on the SIM, provided it comes:

- in MT cases: from the same SC and originating address;
- in MO cases: from the same MS.

Service Centre (SC): Function responsible for the relaying and store-and-forwarding of a short message between an SME and an MS. The SC is not a part of the GSM PLMN, however MSC and SC may be integrated.

Short Message: Information that may be conveyed by means of the Short Message Service described in this specification.

Short Message Entity (SME): An entity which may send or receive Short Messages. The SME may be located in a fixed network, an MS, or an SC.

SMS-STATUS-REPORT: Short message transfer protocol data unit informing the receiving MS of the status of a mobile originated short message previously submitted by the MS, i.e. whether the SC was able to forward the message or not, or whether the message was stored in the SC for later delivery.

SMS-COMMAND: Short message transfer protocol data unit which enables an MS to invoke an operation at the SC. An MS may then, for example, delete a short message, cancel a Status Report Request, enquire about the status of a short message or request another function to be performed by the SC.

The type of operation is indicated by the TP-Command-Type and the particular SM to operate on is indicated by the TP-Message-Number and the TP-Destination-Address. Receipt of an SMS-COMMAND is confirmed by an RP-ACK or RP-ERROR. In the case of certain SMS-COMMANDs, an SMS-STATUS-REPORT may be sent, where the outcome of the SMS-COMMAND is passed in its TP-Status field.

SMS-DELIVER: Short message transfer protocol data unit containing user data (the short message), being sent from an SC to an MS.

SMS-SUBMIT: Short message transfer protocol data unit containing user data (the short message), being sent from an MS to an SC.

Service-Centre-Time-Stamp (SCTS): Information element offering the recipient of a short message the information of when the message arrived at the SM-TL entity of the SC. The time of arrival comprises the year, month, day, hour, minute, second and time zone.

Validity-Period (VP): Information element enabling the originator MS to indicate the time period during which the originator considers the short message to be valid.

2.2.2 Abbreviations

For the purposes of this ETS the following abbreviations apply

E.163	CCITT Rec. E.163 (Blue Book)
E.164	CCITT Rec. E.164 (Blue Book)
ACSE	Association Control Service Element
SM MT	Short Message Mobile Terminated Point-to-Point
SM MO	Short Message Mobile Originated Point-to-Point
SM-AL	Short Message Application Layer
SM-TL	Short Message Transfer Layer
SM-RL	Short Message Relay Layer
SM-LL	Short Message Lower Layers
SM-TP	Short Message Transfer Layer Protocol
SM-RP	Short Message Relay Layer Protocol
SM-TS	Short Message Transfer Service
SM-RS	Short Message Relay Service
T.100	CCITT Rec. T.100 (Blue Book)
T.101	CCITT Rec. T.101 (Blue Book)
TPDU	Transfer protocol data unit
X.121	CCITT Rec. X.121 (Blue Book)
X.400	CCITT Rec. X.400 (Blue Book)

In addition to those above, definitions used in this ETS are listed in GSM 01.04.

iTeh STANDARD PREVIEW

3 Services and service elements (standards.iteh.ai)

The SMS provides a means to transfer short messages between a GSM MS and an SME via an SC. The SC serves as an interworking and relaying function of the message transfer between the MS and the SME.

This specification describes only the short message point-to-point services between the MS and SC. It may, however, refer to possible higher layer applications.