



SLOVENSKI STANDARD

SIST ETS 300 585 E4:2003

01-december-2003

Digitalni celil'ni telekomunikacijski sistem (faza 2) ű Uporaba vmesnika za podatkovno terminalsko opremo űopremo za zaklju'evanje podatkovnih vodov (DTE-DCE) za storitev kratkih sporo'il (SMS) in storitev celil'ne radiodifuzije (GSM 07.05)

Digital cellular telecommunications system (Phase 2) (GSM); Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS) (GSM 07.05)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 585 E4:2003](https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003>

Ta slovenski standard je istoveten z: ETS 300 585 Edition 4

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--


SIST ETS 300 585 E4:2003

en

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

SIST ETS 300 585 E4:2003

<https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003>

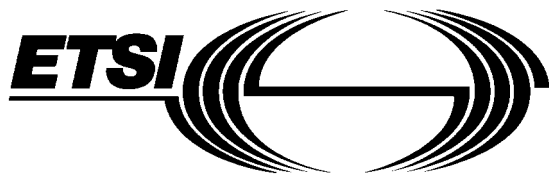

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 585

October 1996

Fourth Edition

Source: ETSI TC-SMG

Reference: RE/SMG-040705PR4

ICS: 33.060.50

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

iTeh STANDARD PREVIEW
(standards.iteh.ai)

**Digital cellular telecommunications system (Phase 2);
Use of Data Terminal Equipment - Data Circuit terminating
Equipment (DTE - DCE) interface for
Short Message Service (SMS) and Cell Broadcast Service (CBS)
(GSM 07.05)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - **Fax:** +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 585 E4:2003](https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003>

Contents

Foreword	7
0 Scope	9
0.1 Normative references	10
0.2 Definitions and abbreviations	10
1 Reference configuration	11
1.1 V.24 Interface Circuits	11
1.1.1 Circuit definitions for the SMS Block mode	11
1.1.2 Circuit definitions for the SMS Text and PDU modes	12
2 SMS Block Mode	13
2.1 Beginning and ending of SMS/CBS Block Mode	13
2.1.1 Beginning SMS/CBS Block Mode	13
2.1.2 Returning from SMS/CBS Block Mode To Default Mode	13
2.2 Protocol description	14
2.3 Requesting messages already held in the Mobile Termination	15
2.3.1 Requesting List Of Messages	15
2.3.2 Requesting Transfer Of Messages	15
2.3.2.1 Requesting Transfer Of A Specific Message	15
2.3.2.2 Requesting Transfer Of All Messages	16
2.3.3 Requesting Diversion Of Incoming Messages	16
2.3.3.1 Requesting SMS Messages	16
2.3.3.2 Requesting CBS Messages	17
2.3.3.3 Requesting indication of message arrival	17
2.3.4 Requesting Transfer Into Mobile Termination	18
2.3.5 Requesting Deletion Of Messages	18
2.4 Message functional definitions and contents	19
2.4.1 Commands Issued By The Terminal Equipment	19
2.4.1.1 List Request	20
2.4.1.2 Get Message	20
2.4.1.3 Get First Message	20
2.4.1.4 Get Next Message	20
2.4.1.5 Transfer Inc SMS	20
2.4.1.6 Indicate Inc SMS	21
2.4.1.7 Transfer Inc CBS	21
2.4.1.8 Insert SMS	21
2.4.1.9 Delete message	21
2.4.1.10 Unable to process	22
2.4.1.11 End SMS Mode	22
2.4.1.12 Acknowledge Message	22
2.4.2 Responses/Indications Issued By The MT	22
2.4.2.1 Message List	23
2.4.2.2 Message	23
2.4.2.3 Get Message Failure	23
2.4.2.4 Inc Message	24
2.4.2.5 Message Arrived	24
2.4.2.6 Insert SMS Complete	24
2.4.2.7 Insert SMS Failure	24
2.4.2.8 Delete Message Complete	25
2.4.2.9 Delete Message Failure	25
2.4.2.10 Unable To Process	25
2.4.2.11 End SMS Mode	25
2.4.2.12 Request Confirmed	26

2.5	General message format and information elements coding.....	27
2.5.1	Message Type	27
2.5.2	Other Information Elements	28
2.5.2.1	Short Message Reference	28
2.5.2.2	SMS Transfer Type.....	29
2.5.2.3	Indication Type	30
2.5.2.4	Insert Type	31
2.5.2.5	Short Message Index	32
2.5.2.6	Short Message Data	34
2.5.2.7	Cause	36
2.5.2.8	Index Count	37
2.5.2.9	CBS Transfer Type	37
2.5.2.10	Page Index	38
2.5.2.11	Last Short Message	38
2.5.2.12	Confirm Type.....	39
2.5.2.13	TP-Failure Cause	40
3	Text Mode.....	41
3.1	Parameter Definitions.....	41
3.2	General Configuration Commands.....	43
3.2.1	Select Message Service +CSMS	43
3.2.2	Preferred Message Storage +CPMS.....	44
3.2.3	Message Format +CMGF	45
3.2.4	Enter SMS Block Mode Protocol +CESP	45
3.2.5	Message Service Failure Result Code +CMS ERROR	46
3.2.6	Informative Examples	46
3.3	Message Configuration Commands.....	47
3.3.1	Service Centre Address +CSCA	47
3.3.2	Set Text Mode Parameters +CSMP	47
3.3.3	Show Text Mode Parameters +CSDH	48
3.3.4	Select Cell Broadcast Message Types +CSCB	48
3.3.5	Save Settings +CSAS	49
3.3.6	Restore Settings +CRES	49
3.3.7	Informative Examples	49
3.4	Message Receiving and Reading Commands.....	50
3.4.1	New Message Indications to TE +CNMI	50
3.4.2	List Messages +CMGL	53
3.4.3	Read Message +CMGR.....	53
3.4.4	Informative Examples	54
3.5	Message Sending and Writing Commands	55
3.5.1	Send Message +CMGS	55
3.5.2	Send Message from Storage +CMSS	56
3.5.3	Write Message to Memory +CMGW	57
3.5.4	Delete Message +CMGD	57
3.5.5	Send Command +CMGC.....	57
3.5.6	Informative Examples	58
4	PDU Mode	60
4.1	List Messages +CMGL	60
4.2	Read Message +CMGR.....	60
4.3	Send Message +CMGS	61
4.4	Write Message to Memory +CMGW	61
4.5	Send Command +CMGC.....	62
Annex A (Normative):	Character Set Conversions for SMS Text Mode.....	63
Annex B (Informative):	Example of processing a data block.....	66
B.1	Example state diagrams for the block receiver	66

B.2	Example of coding and decoding a data block.....	66
History		70

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 585 E4:2003](https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 585 E4:2003](https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003>

Foreword

This fourth edition European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) Technical Committee (TC) of the European Telecommunications Standards Institute (ETSI).

This ETS defines a protocol for use of the V series DTE/DCE interface over the R reference point for SMS and CBS procedures within the Digital cellular telecommunications system (Phase 2).

This ETS correspond to GSM 07.05 version 4.7.0.

The specification from which this ETS has been derived was originally based on CEPT documentation, hence the presentation of this ETS may not be entirely in accordance with the ETSI/PNE rules.

Reference is made within this ETS to GSM Technical Specifications (GSM-TS) (note).

NOTE: TC-SMG has produced documents which give the technical specifications for the implementation of the Digital cellular telecommunications system. Historically, these documents have been identified as GSM Technical Specifications (GSM-TSS). These TSS may have subsequently become I-ETSS (Phase 1), or ETSS (Phase 2), whilst others may become ETSI Technical Reports (ETRs). GSM-TSS are, for editorial reasons, still referred to in current GSM ETSS.

Transposition dates	
Date of adoption of this ETS:	4 October 1996
Date of latest announcement of this ETS (doa):	31 January 1997
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 July 1997
Date of withdrawal of any conflicting National Standard (dow):	31 July 1997

<https://standards.iteh.ai/catalog/standards/sist/cb61c1d5-b0ab-4431-a6c5-92986cb22ad6/sist-ets-300-585-e4-2003>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 585 E4:2003](https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003)

<https://standards.iteh.ai/catalog/standards/sist/cb61e1d5-b0ab-4431-a6e5-92986cb22ad6/sist-ets-300-585-e4-2003>

0 Scope

This European Telecommunication Standard (ETS) defines three interface protocols for control of SMS functions within a GSM mobile telephone from a remote terminal via an asynchronous interface.

Section 2 defines a binary protocol ("Block Mode"). The protocol includes error protection and is suitable for use where the link may not be completely reliable. It will be of particular use where control of remote devices is required. Efficient transfer of binary encoded user data is possible.

Section 3 defines a character-based interface based on "AT" commands ("Text Mode"). This mode is suitable for unintelligent terminals or terminal emulators, and for application software built on command structures like those defined in V.25ter. Some of the commands defined in Section 3 will also be useful for implementations of Section 2 and/or Section 4, for example enabling an indication of incoming SMS messages.

Section 4 defines a character-based interface with hex-encoded binary transfer of message blocks ("PDU Mode"). This mode is suitable for software drivers based on AT command structures which do not understand the content of the message blocks and can only pass them between the MT and "upper level" software resident in the TE.

In all three modes, the terminal is considered to be in control for SMS/CBS transactions.

This specification considers the mobile termination to be a single entity. Other GSM Technical Specifications describe the split of functionality between the mobile equipment and SIM.

The three "modes" referred to above, are represented in figure 0.1/GSM 07.05.

The "Block mode" is a self contained mode in its own right, and when entered, control will remain within that mode until the procedures to exit the mode are executed after which control is returned to the V.25ter "command" state or "on-line command" state.

The "Text" and "PDU" modes are not in themselves V.25ter states but are simply sets of commands which will operate in either the V.25ter "command" state or "on-line command" state. The "Text" and "PDU" modes are transitory states and after each operation, control is automatically returned to the V.25ter "command" state or "on-line command" state. Whilst in the V.25ter command state, the MS is available to handle incoming and outgoing calls such as Data or Facsimile.

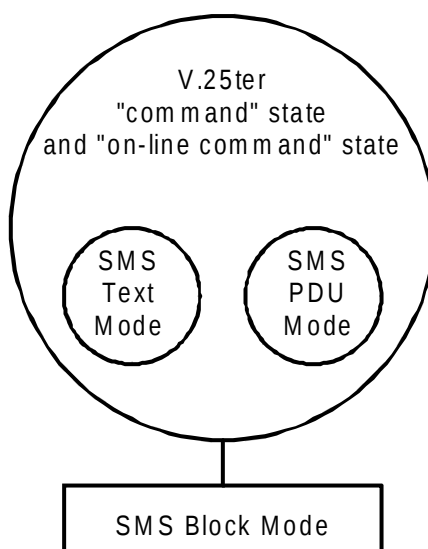


Figure 0.1/GSM 07.05: Block, Text and PDU modes

0.1 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 01.04 (ETR 100): "Digital cellular telecommunication system (Phase 2); Abbreviations and acronyms".
- [2] GSM 03.38 (ETS 300 628): "Digital cellular telecommunication system (Phase 2); Alphabet and language specific information".
- [3] GSM 03.40 (ETS 300 536): "Digital cellular telecommunication system (Phase 2); Technical realization of the Short Message Service (SMS) Point to Point (PP)".
- [4] GSM 03.41 (ETS 300 537): "Digital cellular telecommunication system (Phase 2); Technical realization of Short Message Service Cell Broadcast (SMSCB)".
- [5] GSM 04.08 (ETS 300 557): "Digital cellular telecommunication system (Phase 2); Mobile radio interface layer 3 specification".
- [6] GSM 04.11 (ETS 300 559): "Digital cellular telecommunication system (Phase 2); Point-to-Point (PP) Short Message Service (SMS) support on mobile radio interface".
- [7] GSM 04.12 (ETS 300 560): "Digital cellular telecommunication system (Phase 2); Short Message Service Cell Broadcast (SMSCB) support on the mobile radio interface".
- [8] GSM 07.01 (ETS 300 582): "Digital cellular telecommunication system (Phase 2); General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [9] GSM 07.07 (ETS 300 642): "Digital cellular telecommunication system (Phase 2); AT command set for GSM Mobile Equipment (ME)".
- [10] GSM 11.11 (ETS 300 608): "Digital cellular telecommunication system (Phase 2); Specification of the Subscriber Identity Module - Mobile Equipment (SIM - ME) interface".
- [11] CCITT Recommendation V.25ter: "Serial Asynchronous Automatic Dialling And Control".
- [12] CCITT Recommendation V.24: "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment".
- [13] CCITT Recommendation E.164: "Numbering plan for the ISDN era".
- [14] CCITT Recommendation E.163: "Numbering plan for the international telephone service".

0.2 Definitions and abbreviations

Abbreviations used in this specification are listed in GSM 01.04 [1].

1 Reference configuration

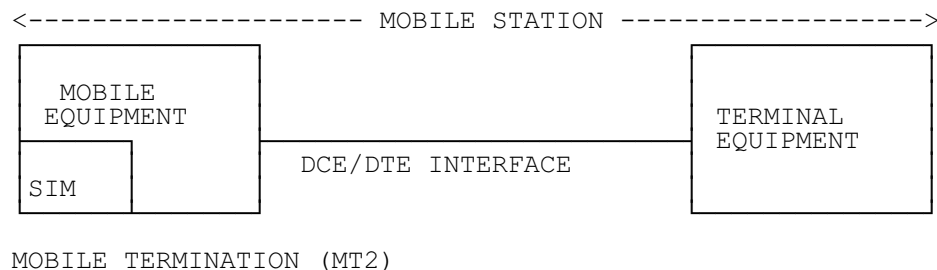


Figure 1: Reference configuration

The mobile termination consists of the mobile equipment (ME) and the SIM. Messages may be stored in either, but this specification does not distinguish between messages stored in the SIM or in the ME. The management of message storage in the two parts of the mobile termination is a matter for the mobile termination implementation.

1.1 V.24 Interface Circuits

The operation of the CCITT V.24 blue book interface circuits for SMS is shown in table 1.1/GSM 07.05.

Table 1.1/GSM 07.05: Use of V.24 interface circuits

V.24 CIRCUIT	DESCRIPTION	TE to MT	MT to TE
CT102	signal ground	x	x
CT103	TXD	x	
CT104	RXD		x
CT105	RTS	x	
CT106	CTS		x
CT107	DSR		x
CT108.2	DTR	x	
CT109	DCD		x

NOTE: CT105 at the TE is connected to CT133 at the MT

1.1.1 Circuit definitions for the SMS Block mode

CT103

All commands from the TE to the MT are transferred across this circuit. Inband flow control is not permitted during Block Mode.

CT104

All responses/indications from the MT to the TE are transferred across this circuit. Inband flow control is not permitted during Block Mode.

CT105

This circuit allows the TE to flow control the MT when in the Block Mode and at other times if hardware flow control is enabled.

CT106

This circuit allows the MT to flow control the TE when in the Block Mode and at other times if hardware flow control is enabled.

CT107

This circuit shall be set to the ON condition before entry into the Block Mode, and shall remain in the ON condition during Block Mode. If the TE detects that this circuit returns to the OFF condition during the block mode then the TE shall return CT108.2 to the OFF condition and exit the Block Mode.

CT108.2

This circuit shall be set in the ON condition before the AT+CESP command is sent from the TE to begin the Block Mode, and shall be maintained in the ON condition during the Block Mode. It shall be returned to the OFF condition after the command "END SMS MODE" has been accepted and acknowledged by the MT. If the MT detects that this circuit returns to the OFF condition during the Block Mode then the MT shall exit the Block Mode.

CT109

This circuit shall be set to the ON condition before entry into the Block Mode and remain in the ON condition during the Block Mode. If the TE detects that this circuit returns to the OFF condition during the Block Mode then the TE shall return CT108.2 to the OFF condition and shall exit the Block Mode.

1.1.2 Circuit definitions for the SMS Text and PDU modes

Only circuits CT102, CT103 and CT104 are mandatory for the Text and PDU modes. The functionality and operation of other circuits shall be in accordance with V.25ter.

2 SMS Block Mode

2.1 Beginning and ending of SMS/CBS Block Mode

2.1.1 Beginning SMS/CBS Block Mode

As described in TS GSM 07.01, the DTE/DCE interface is normally associated with the terminal adaptation function (TAF), if such a function is available. When no data connection is in progress, and the terminal equipment wishes to enter SMS/CBS mode, the command "AT+CESP" shall be issued by the TE through the DTE/DCE interface requesting that the Block mode protocol described in this specification is to be used. The syntax of this command is further described in section 3.2.4 later. The syntax for these commands is derived from V.25ter, i.e. the command is encoded as an IA5 character string together with delimiters as described in V.25ter.

Upon receipt of this command, the mobile termination shall respond as follows:

If the mobile termination supports SMS/CBS block mode commands, responses and indications as described in this technical specification, it shall respond with "OK" and enter the SMS/CBS mode.

If the mobile termination does not support SMS/CBS block mode commands, responses and indications as described in this technical specification, it shall respond with "ERROR" and remain in the current mode.

If the SMS/CBS block mode command is accepted by the mobile termination, then all further commands, responses and indications shall be as defined in section 2 of this technical specification. These SMS/CBS mode commands, responses and indications use 8-bit encoded data and not IA5 characters.

2.1.2 Returning from SMS/CBS Block Mode To Default Mode

When the terminal equipment wishes to return to default mode from SMS/CBS mode, it shall issue the command "END SMS MODE", described in section 2.4.1.11. The mobile termination shall respond with "OK" to indicate that the DTE/DCE interface has returned to default mode. The TE shall change back to default mode whether or not such a response is received.

The TE may also indicate that it has exit from the SMS/CBS mode through the use of CT 108/2 (see section 1.1)

If an incoming data call arrives while the DTE/DCE interface is set to SMS/CBS mode, then the mobile termination may autonomously issue the "END SMS MODE" indication (section 2.4.2.11) and revert to default mode in order to connect the data call through the TAF.

The MT may exit from SMS/CBS mode autonomously if the power to the MT is switched off and then on again. In addition, the MT manufacturer may provide MMI to change the mode back to the default mode. In the latter case, the MT shall issue the "END SMS MODE" indication (section 2.4.2.11) and exit the SMS/CBS mode immediately.

The MT may also indicate that it has exit from the SMS/CBS mode through the use of CT 107 and CT 109 (see section 1.1).

A BREAK condition in either direction at the DTE/DCE interface shall cause the TE and the MT to exit from the SMS/CBS block mode and return to the default mode.

In the event where the TE or the MT find themselves unable to recover from a protocol error then either entity may exit the SMS/CBS mode using any of the mechanisms described above. Confirmation of default mode operation will be achieved through the use of AT commands and responses.