
**Plastics — Determination of Charpy
impact properties —**

**Part 1:
Non-instrumented impact test**

Plastiques — Détermination des caractéristiques au choc Charpy —

Partie 1: Essai de choc non instrumenté

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

ISO 179-1:2010

<https://standards.iteh.ai/catalog/standards/sist/a7fcd0d-8887-48d7-be16-9e17243e232e/iso-179-1-2010>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 179-1:2010

<https://standards.iteh.ai/catalog/standards/sist/a7fcd0d-8887-48d7-be16-9e17243e232e/iso-179-1-2010>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	2
3 Terms and definitions	2
4 Principle.....	3
5 Apparatus	3
5.1 Test machine.....	3
5.2 Micrometers and gauges	3
6 Test specimens.....	4
6.1 Preparation.....	4
6.1.1 Moulding and extrusion compounds	4
6.1.2 Sheets	4
6.1.3 Long-fibre-reinforced materials	4
6.1.4 Checking.....	7
6.1.5 Notching	7
6.2 Anisotropy.....	7
6.3 Shape and dimensions	8
6.3.1 Materials not exhibiting interlaminar shear fracture	8
6.3.2 Materials exhibiting interlaminar shear fracture (e.g. long-fibre-reinforced materials).....	9
6.4 Number of test specimens.....	9
6.5 Definition of span between specimen supports, L_c	10
6.6 Conditioning	11
7 Procedure	11
8 Calculation and expression of results	12
8.1 Unnotched specimens	12
8.2 Notched specimens.....	12
8.3 Statistical parameters	13
8.4 Significant figures	13
9 Precision.....	13
10 Test report.....	13
Annex A (informative) Additional methods for investigating the influence of surface effects.....	15
Annex B (informative) Precision data	17
Annex C (informative) Determining the notch tip radius using a CCD microscope	19
Bibliography.....	22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 179-1 was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 2, *Mechanical properties*.

This second edition cancels and replaces the first edition (ISO 179-1:2000), which has been technically revised. The main changes are as follows: **(standards.iteh.ai)**

- a new subclause (6.5) has been added, defining the span between the specimen supports and indicating a convenient position at which it can be measured;
- a new annex, Annex C, has been added, giving a method of measuring the radius of the notch in a notched specimen.

This second edition also incorporates the Amendment ISO 179-1:2000/Amd.1:2005.

ISO 179 consists of the following parts, under the general title *Plastics — Determination of Charpy impact properties*:

- *Part 1: Non-instrumented impact test*
- *Part 2: Instrumented impact test*

Plastics — Determination of Charpy impact properties —

Part 1: Non-instrumented impact test

1 Scope

1.1 This part of ISO 179 specifies a method for determining the Charpy impact strength of plastics under defined conditions. A number of different types of specimen and test configurations are defined. Different test parameters are specified according to the type of material, the type of test specimen and the type of notch.

1.2 The method can be used to investigate the behaviour of specified types of specimen under the impact conditions defined and for estimating the brittleness or toughness of specimens within the limitations inherent in the test conditions. It can also be used for the determination of comparative data from similar types of material.

1.3 The method has a greater range of applicability than that given in ISO 180^[1] and is more suitable for the testing of materials showing interlaminar shear fracture or of materials exhibiting surface effects due to environmental factors.

1.4 The method is suitable for use with the following range of materials:

- rigid thermoplastic moulding and extrusion materials (including filled and reinforced compounds in addition to unfilled types) and rigid thermoplastics sheets;
- rigid thermosetting moulding materials (including filled and reinforced compounds) and rigid thermosetting sheets (including laminates);
- fibre-reinforced thermosetting and thermoplastic composites incorporating unidirectional or multi-directional reinforcements (such as mats, woven fabrics, woven rovings, chopped strands, combination and hybrid reinforcements, rovings and milled fibres) or incorporating sheets made from pre-impregnated materials (prepregs), including filled and reinforced compounds;
- thermotropic liquid-crystal polymers.

1.5 Notched samples are not normally suitable for use with rigid cellular materials, long-fibre-reinforced composites or thermotropic liquid-crystal polymers. In these cases, unnotched samples may be used.

1.6 The method is suited to the use of specimens moulded to the chosen dimensions, machined from the central portion of a standard multipurpose test specimen (see ISO 3167) or machined from finished or semifinished products such as mouldings, laminates and extruded or cast sheet.

1.7 The method specifies preferred dimensions for the test specimen. Tests which are carried out on specimens of different dimensions or with different notches, or specimens which are prepared under different conditions, might produce results which are not comparable. Other factors, such as the energy capacity of the apparatus, the impact velocity and the conditioning of the specimens can also influence the results. Consequently, when comparative data are required, these factors must be carefully controlled and recorded.

1.8 The method should not be used as a source of data for design calculations. Information on the typical behaviour of a material can be obtained, however, by testing at different temperatures, by varying the notch radius and/or the specimen thickness and by testing specimens prepared under different conditions.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 291, *Plastics — Standard atmospheres for conditioning and testing*

ISO 293, *Plastics — Compression moulding of test specimens of thermoplastic materials*

ISO 294-1, *Plastics — Injection moulding of test specimens of thermoplastic materials — Part 1: General principles, and moulding of multipurpose and bar test specimens*

ISO 294-3, *Plastics — Injection moulding of test specimens of thermoplastic materials — Part 3: Small plates*

ISO 295, *Plastics — Compression moulding of test specimens of thermosetting materials*

ISO 1268-11, *Fibre-reinforced plastics — Methods of producing test plates — Part 11: Injection moulding of BMC and other long-fibre moulding compounds — Small plates*

ISO 2602, *Statistical interpretation of test results — Estimation of the mean — Confidence interval*

ISO 2818, *Plastics — Preparation of test specimens by machining*

ISO 3167, *Plastics — Multipurpose test specimens* [ISO 179-1:2010](https://standards.iteh.ai/catalog/standards/sist/a7fcd10d-8887-48d7-be16-1f1c43e9c770/iso-179-1-2010)

[https://standards.iteh.ai/catalog/standards/sist/a7fcd10d-8887-48d7-be16-](https://standards.iteh.ai/catalog/standards/sist/a7fcd10d-8887-48d7-be16-1f1c43e9c770/iso-179-1-2010)

ISO 10724-1, *Plastics — Injection moulding of test specimens of thermosetting powder moulding compounds (PMCs) — Part 1: General principles and moulding of multipurpose test specimens*

ISO 13802, *Plastics — Verification of pendulum impact-testing machines — Charpy, Izod and tensile impact-testing*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

Charpy unnotched impact strength

a_{cU}
impact energy absorbed in breaking an unnotched specimen, referred to the original cross-sectional area of the specimen

NOTE It is expressed in kilojoules per square metre (kJ/m²).

3.2

Charpy notched impact strength

a_{cN}
impact energy absorbed in breaking a notched specimen, referred to the original cross-sectional area of the specimen at the notch, where N = A, B or C, depending on the notch type (see 6.3.1.1.2)

NOTE It is expressed in kilojoules per square metre (kJ/m²).

3.3 edgewise impact

e

direction of blow parallel to the dimension b , with impact on the narrow longitudinal surface $h \times l$ of the specimen (see Figure 1, left, and Figures 2 and 4)

3.4 flatwise impact

f

direction of blow parallel to the dimension h , with impact on the broad longitudinal surface $b \times l$ of the specimen (see Figure 1, right, and Figures 3 and 4)

3.5 normal impact

n

(laminar-reinforced plastics) impact with the direction of blow normal to the plane of reinforcement (see Figure 4)

3.6 parallel impact

p

(laminar-reinforced plastics) impact with the direction of blow parallel to the plane of reinforcement (see Figure 4)

4 Principle

iTeh STANDARD PREVIEW
(standards.iteh.ai)

The test specimen, supported near its ends as a horizontal beam, is impacted by a single blow of a striker, with the line of impact midway between the supports, and bent at a high, nominally constant, velocity.

In the case of edgewise impact with notched specimens, the line of impact is directly opposite the single notch (see Figure 1, left, and Figure 2).

5 Apparatus


5.1 Test machine

The principles, characteristics and verification of suitable test machines are detailed in ISO 13802.

ISO 13802 describes partial verification and full verification. In the case of full verification, some items are difficult to verify when the apparatus is assembled. Such verifications are assumed to be incumbent on the manufacturer.

5.2 Micrometers and gauges

Micrometers and gauges capable of measuring the essential dimensions of test specimens to an accuracy of 0,02 mm are required. For measuring the dimension b_N of notched specimens, the micrometer shall have a spindle with a measuring tip having a suitable profile to fit the shape of the notch.

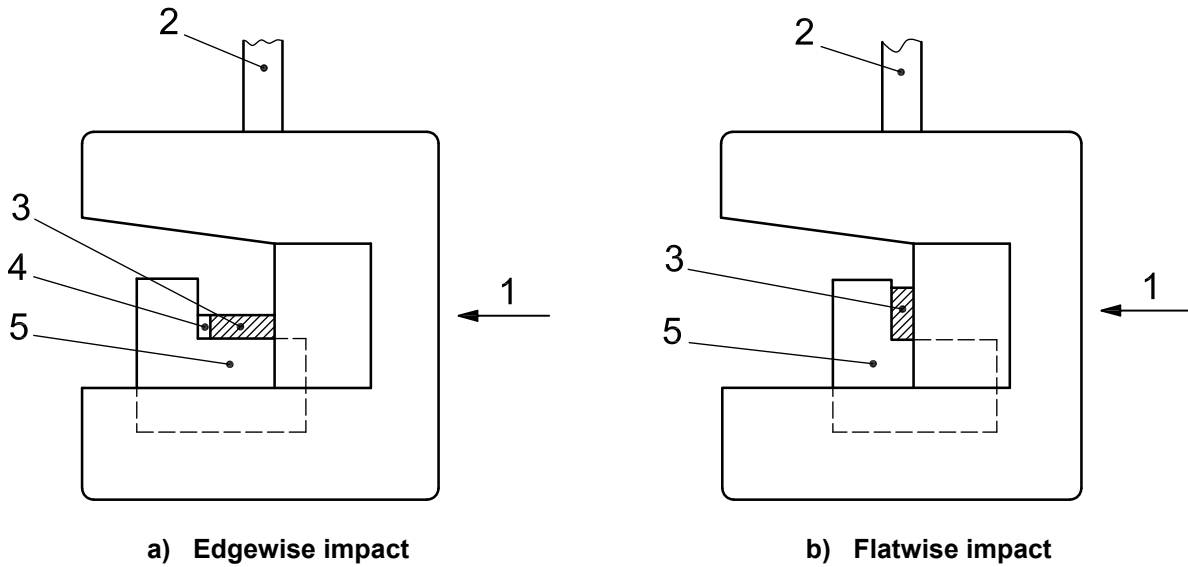

Key

- 1 direction of blow
- 2 rod of pendulum
- 3 test specimen
- 4 notch
- 5 support

iTeh STANDARD PREVIEW

Figure 1 — Striking edge and support blocks for type 1 test specimen at moment of impact

ISO 179-1:2010

<https://standards.itih.ai/catalog/standards/sist/a7fcd0d-8887-48d7-be16-9e17243e232e/iso-179-1-2010>

6 Test specimens

6.1 Preparation

6.1.1 Moulding and extrusion compounds


Specimens shall be prepared in accordance with the relevant material specification. The specimens shall be either directly compression moulded in accordance with ISO 293 or ISO 295 or injection moulded from the material in accordance with ISO 294-1, ISO 294-3 or ISO 10724-1, as appropriate, or machined in accordance with ISO 2818 from sheet that has been compression or injection moulded from the compound. Type 1 specimens may be cut from multipurpose test specimens complying with ISO 3167, type A.

6.1.2 Sheets

Specimens shall be machined from sheets in accordance with ISO 2818.

6.1.3 Long-fibre-reinforced materials

A panel shall be prepared in accordance with ISO 1268-11 or another specified or agreed upon preparation procedure. Specimens shall be machined in accordance with ISO 2818.

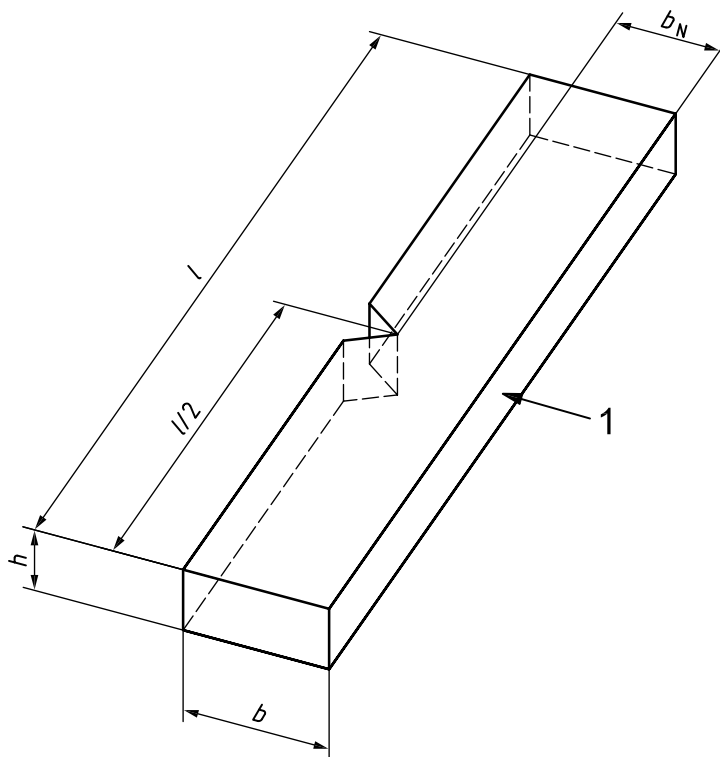


Key
1 direction of blow

iTeh STANDARD PREVIEW
(standards.iteh.ai)


Figure 2 — Charpy edgewise impact (e) with single-notched specimen

ISO 179-1:2010
<https://standards.iteh.ai/catalog/standards/sist/a7fcd80d-8887-48d7-be16-9e17243e232e/iso-179-1-2010>

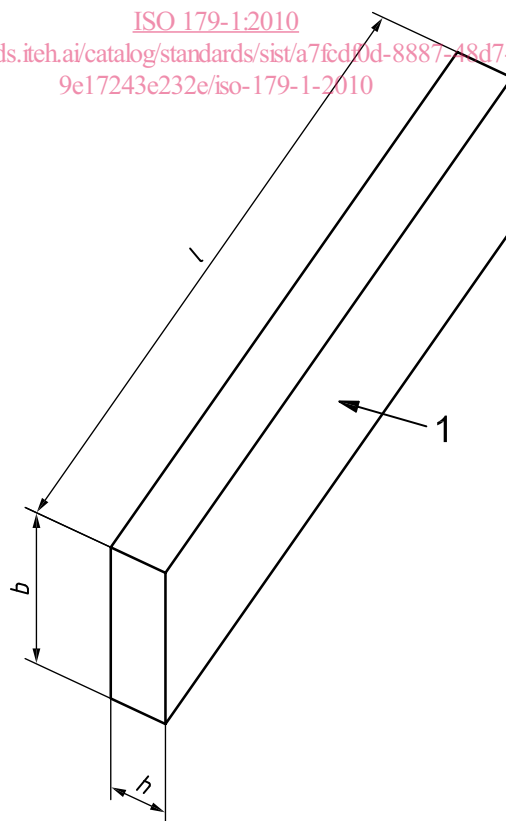

Key
1 direction of blow

Figure 3 — Charpy flatwise impact (f)

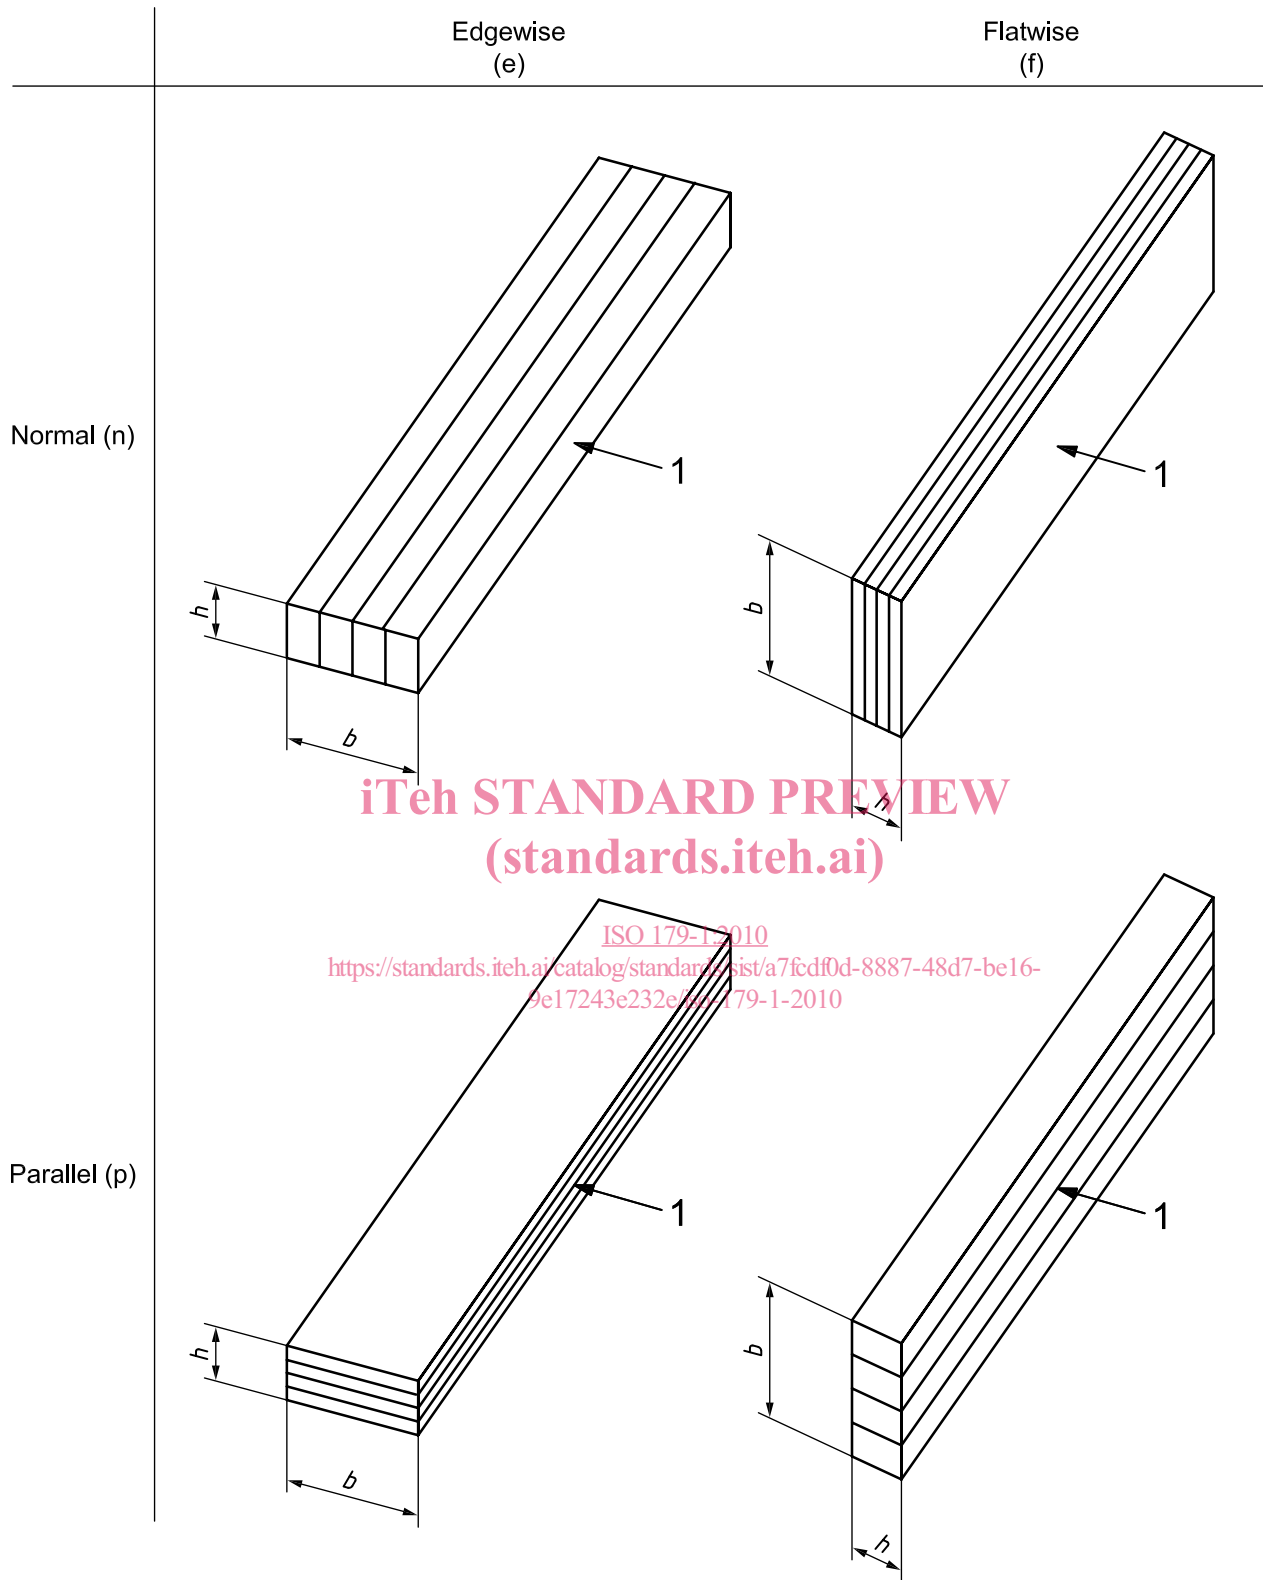

Key

1 direction of blow

Edgewise (e) and flatwise (f) indicate the direction of the blow with respect to the specimen thickness, h , and specimen width, b . Normal (n) and parallel (p) indicate the direction of the blow with respect to the laminate plane.

The Charpy “fn” and “ep” tests are used for laminates, while both the Charpy “en” and “ep” tests are used for other materials. The Charpy “fn” and “fp” tests are used for testing materials exhibiting surface effects.

Figure 4 — Scheme of designations describing the direction of blow

6.1.4 Checking

The specimens shall be free of twist and shall have mutually perpendicular parallel surfaces. The surfaces and edges shall be free from scratches, pits, sink marks and flash.

The specimens shall be checked for conformity with these requirements by visual observation against straightedges, set squares and flat plates, and by measuring with micrometer callipers.

Specimens showing measurable or observable departure from one or more of these requirements shall be rejected or machined to proper size and shape before testing.

6.1.5 Notching

6.1.5.1 Machined notches shall be prepared in accordance with ISO 2818. The profile of the cutting tooth shall be such as to produce in the specimen a notch of the contour and depth shown in Figure 5, at right angles to its principal axes (see Note).

NOTE The radius of the notch tip can be measured by the method given in Annex C.

6.1.5.2 Specimens with moulded-in notches may be used if specified for the material being tested (see Note).

NOTE Specimens with moulded-in notches do not give results comparable to those obtained from specimens with machined notches.

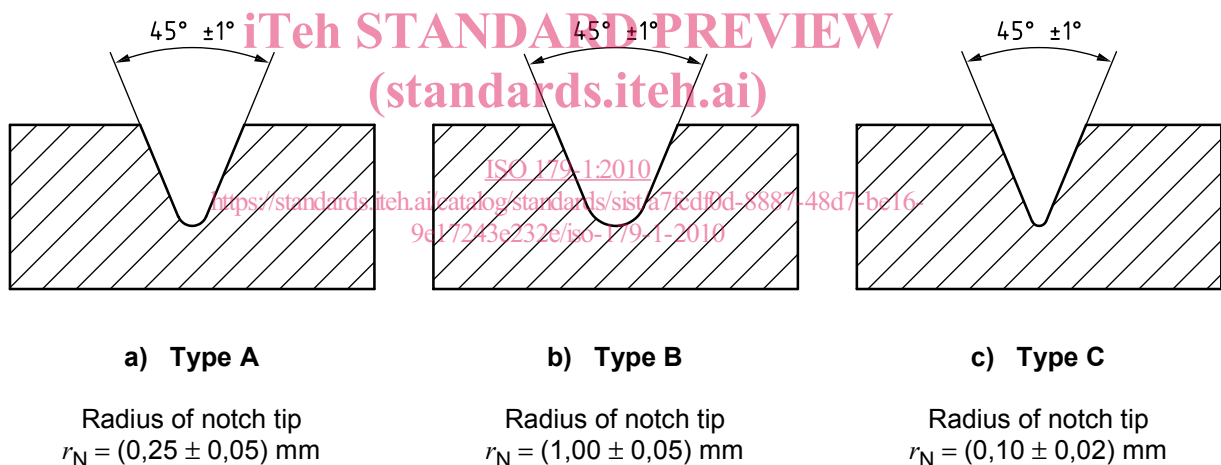


Figure 5 — Notch types

6.2 Anisotropy

Certain types of sheet or panel material or specimen taken from injection-moulded plates can show different impact properties, depending on the direction in the plane of the sheet or panel. In such cases, it is customary to cut groups of test specimens with their major axes respectively parallel and perpendicular to the direction of some feature of the sheet or panel which is either visible or inferred from knowledge of the method of manufacture.