
**Hand-held portable power tools — Test
methods for evaluation of vibration
emission —**

**Part 2:
Wrenches, nutrunners and screwdrivers**

iTeh STANDARD PREVIEW
*Machines à moteur portatives — Méthodes d'essai pour l'évaluation de
l'émission de vibrations —
(standards.iteh.ai)
Partie 2: Clés, boulonneuses et visseuses*

ISO 28927-2:2009

<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 28927-2:2009

<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms, definitions and symbols	2
3.1 Terms and definitions	2
3.2 Symbols	3
4 Basic standards and vibration test codes	3
5 Description of the family of machines	3
6 Characterization of vibration	7
6.1 Direction of measurement	7
6.2 Location of measurements	7
6.3 Magnitude of vibration	13
6.4 Combination of vibration directions	13
7 Instrumentation requirements	13
7.1 General	13
7.2 Mounting of transducers	13
7.3 Frequency weighting filter	13
7.4 Integration time	13
7.5 Auxiliary equipment	14
7.6 Calibration	14
8 Testing and operating conditions of the machinery	14
8.1 General	14
8.2 Operating conditions	15
8.3 Other quantities to be specified	15
8.4 Attached equipment, work piece and task	15
8.5 Operators	18
9 Measurement procedure and validity	19
9.1 Reported vibration values	19
9.2 Declaration and verification of the vibration emission value	19
10 Measurement report	20
Annex A (informative) Model test report for vibration emission of wrenches, nutrunners and screwdrivers	21
Annex B (normative) Determination of uncertainty	23
Annex C (normative) Brake devices — Assembly drawings and specification of parts	26
Bibliography	39

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 28927-2 was prepared by Technical Committee ISO/TC 118, *Compressors and pneumatic tools, machines and equipment*, Subcommittee SC 3, *Pneumatic tools and machines*.

This first edition of ISO 28927-2 cancels and replaces ISO 8662-7:1997, of which it constitutes a technical revision. The most important changes are (standards.iteh.ai)

- vibration measurement in three axes and at both hand positions,
- new transducer positions,
- improved definition of transducer positions and orientation, and
- all types of screwdrivers and nutrunners, excepting one-shot nutrunners, now covered.

ISO 28927 consists of the following parts, under the general title *Hand-held portable power tools — Test methods for evaluation of vibration emission*:

- *Part 1: Angle and vertical grinders*¹⁾
- *Part 2: Wrenches, nutrunners and screwdrivers*
- *Part 3: Polishers and rotary, orbital and random orbital sanders*²⁾
- *Part 4: Straight grinders*³⁾

1) Together with Part 4, replaces ISO 8662-4, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 4: Grinders*.

2) Replaces ISO 8662-8, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 8: Polishers and rotary, orbital and random orbital sanders*.

3) Together with Part 1, replaces ISO 8662-4, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 4: Grinders*.

- Part 5: Drills and impact drills⁴⁾
- Part 6: Rammers⁵⁾
- Part 7: Nibblers and shears⁶⁾
- Part 8: Saws, polishing and filing machines with reciprocating action and small saws with oscillating or rotating action⁷⁾
- Part 9: Scaling hammers and needle scalers⁸⁾
- Part 10: Percussive drills, hammers and breakers⁹⁾
- Part 11: Stone hammers¹⁰⁾

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 28927-2:2009

<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>

-
- 4) Replaces ISO 8662-6, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 6: Impact drills*. Non-impacting drills now covered.
- 5) Replaces ISO 8662-9, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 9: Rammers*.
- 6) Replaces ISO 8662-10, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 10: Nibblers and shears*
- 7) Replaces ISO 8662-12, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 12: Saws and files with reciprocating action and saws with oscillating or rotating action*
- 8) Together with Part 11, replaces ISO 8662-14, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 14: Stone-working tools and needle scalers*.
- 9) Replaces ISO 8662-2, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 2: Chipping hammers and riveting hammers*, ISO 8662-3, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 3: Rock drills and rotary hammers*, and ISO 8662-5, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 5: Pavement breakers and hammers for construction work*. Chipping and riveting hammers, rock drills and rotary hammers all covered.
- 10) Together with Part 9, replaces ISO 8662-14, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 14: Stone-working tools and needle scalers*.

Introduction

This document is a type-C standard as stated in ISO 12100.

When requirements of this type-C standard are different from those which are stated in type-A or -B standards, the requirements of this type-C standard take precedence over the requirements of the other standards for machines that have been designed and built according to the requirements of this type-C standard.

The vibration test codes for portable hand-held machines given in ISO 28927 are based on ISO 20643, which gives general specifications for the measurement of the vibration emission of hand-held and hand-guided machinery. ISO 28927 specifies the operation of the machines under type-test conditions and other requirements for the performance of type tests. The structure/numbering of its clauses follows that of ISO 20643.

The basic principle for transducer positioning first introduced in the EN 60745 series of European standards is followed, representing a deviation from ISO 20643 for reasons of consistency. The transducers are primarily positioned next to the hand in the area between the thumb and the index finger, where they give the least disturbance to the operator gripping the machine.

It has been found that vibrations generated by wrenches and nutrunners during tightening and unfastening of threaded fasteners vary considerably in typical use. For impact and impulse machines, this is largely due to misalignment between the machine and the fastener, to worn sockets or to the use of universal joints and angle heads. Owing to the very short tightening times in real use, the response times in the vibration measurement system used also become critical for the measurement results.

In order to provide a method that gives good measurement reproducibility, this part of ISO 28927 adopts a procedure for testing impact and impulse machines using a test device based on break blocks acting on the outer diameter of a test socket, and a free running test for other machines. The procedures of ISO 5349 are required whenever exposure at the workplace is to be assessed.

The values obtained are type-test values intended to be representative of the average of the upper quartile of typical vibration magnitudes in real-world use of the machines. However, the actual magnitudes will vary considerably from time to time and depend on many factors, including the operator, the task and the inserted tool or consumable. The state of maintenance of the machine itself might also be of importance. Under real working conditions the influences of the operator and process can be particularly important at low magnitudes. It is therefore not recommended that emission values below $2,5 \text{ m/s}^2$ be used for estimating the vibration magnitude under real working conditions. In such cases, $2,5 \text{ m/s}^2$ is the recommended vibration magnitude for estimating the machine vibration.

If accurate values for a specific work place are required, then measurements (according to ISO 5349) in that work situation could be necessary. Vibration values measured in real working conditions can be either higher or lower than the values obtained using this part of ISO 28927.

Higher vibration magnitudes can easily occur in real work situations, caused by either misalignment between the machine and fastener, worn sockets or the use of universal joints or angle heads. The operator's hands ought never to be in contact with rotating parts such as the sockets or the extensions used.

The vibration test codes given in ISO 28927 supersede those given in ISO 8662, whose parts have been replaced by the corresponding parts of ISO 28927 (see Foreword).

NOTE ISO 8662-11, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 11: Fastener driving tools*, and ISO 8662-13, *Hand-held portable power tools — Measurement of vibrations at the handle — Part 13: Die grinders*, could be replaced by future parts of ISO 28927.

Hand-held portable power tools — Test methods for evaluation of vibration emission —

Part 2: Wrenches, nutrunners and screwdrivers

1 Scope

This part of ISO 28927 specifies a laboratory method for measuring hand-transmitted vibration emission at the handles of hand-held power-driven wrenches, nutrunners and screwdrivers used for tightening and loosening threaded fasteners. It is a type-test procedure for establishing the magnitude of vibration in the gripping areas of a machine when operating at a specified load. The method has been tested for fastening tasks only. It is intended that the results be used to compare different models of the same type of machine.

This part of ISO 28927 is applicable to hand-held machines (see Clause 5), driven pneumatically or by other means, with impact or impulse action, or shut-off, ratchet or stall type, and of all designs — straight, pistol-grip, angle or bow handle. It covers machines with 6,3 mm to 40 mm (1/4 in to 1 1/2 in) male or female drive output shafts, as well as other geometries. It is not applicable to nutrunners designed to be used only in torque reaction arms.

NOTE To avoid confusion with the terms “power tool” and “inserted tool”, *machine* is used for the former throughout this document.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 691:2005, *Assembly tools for screws and nuts — Wrench and socket openings — Tolerances for general use*

ISO 2787:1984, *Rotary and percussive pneumatic tools — Performance tests*

ISO 5349:2001 (all parts), *Mechanical vibration — Measurement and evaluation of human exposure to hand-transmitted vibration*

ISO 5391:2003, *Pneumatic tools and machines — Vocabulary*

ISO 17066:2007, *Hydraulic tools — Vocabulary*

ISO 20643:2005, *Mechanical vibration — Hand-held or hand guided machinery — Principles for evaluation of vibration emission*

EN 12096:1997, *Mechanical vibration — Declaration and verification of vibration emission values*

3 Terms, definitions and symbols

For the purposes of this document, the terms and definitions given in ISO 5391, ISO 17066 and ISO 20643, and the following terms, definitions and symbols, apply.

3.1 Terms and definitions

3.1.1

loading device

brake device

device used to obtain a stable rotational frequency of the output shaft of the machine and to absorb the output energy of the machine

3.1.2

impact wrench

rotary machine fitted with a rotating or oscillating motor driving a hammer that periodically strikes an anvil to tighten nuts and bolts without producing any considerable reaction torque on the machine

NOTE Adapted from ISO 5391:2003, definition 3.2.1.

3.1.3

ratchet wrench

angle drive wrench that progressively rotates a socket by means of a ratchet and pawl coupling

[ISO 5391:2003, definition 3.1.2.8]

3.1.4

screwdriver

rotary, reversible or non-reversible machine that drives a spindle fitted with a screwdriver bit

[ISO 5391:2003, definition 3.1.1]
<http://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>

NOTE *Nutrunner* or *screwdriver* can designate the same machine fitted with a socket or screwdriver bit, respectively.

3.1.5

nutrunner

rotary, reversible or non-reversible machine incorporating a socket adapter for the tightening of nuts and bolts

NOTE 1 Adapted from ISO 5391:2003, definition 3.1.2.

NOTE 2 *Nutrunner* or *screwdriver* can designate the same machine fitted with a socket or screwdriver bit, respectively.

3.1.6

automatic shut-off nutrunner

nutrunner where the setting of the tightening torque is achieved by shutting off the motor when the set torque is achieved

NOTE Adapted from ISO 5391:2003, definition 3.1.2.5.

3.1.7

impulse nutrunner

impulse wrench

machine fitted with a motor that drives an hydraulic impulse mechanism for tightening threaded fasteners, applying torque to a fastener in discontinuous increments through a hydraulic impulse unit

NOTE Adapted from ISO 5391:2003, definition 3.3.1.

3.1.8**stall-type nutrunner**

nutrunner whose tightening torque can only be set by air pressure adjustments

NOTE Adapted from ISO 5391:2003, definition 3.1.2.3.

3.2 Symbols

Symbol	Description	Unit
a_{hw}	root-mean-square (r.m.s.) single-axis acceleration value of the frequency-weighted hand-transmitted vibration	m/s ²
a_{hv}	vibration total value of frequency-weighted r.m.s. acceleration; root sum of squares of a_{hw} values for the three measured axes of vibration	m/s ²
$\overline{a_{hv}}$	arithmetic mean value of a_{hv} values of runs for one operator for one hand position	m/s ²
a_h	arithmetic mean value of $\overline{a_{hv}}$ values for all operators for one hand position	m/s ²
$\overline{a_h}$	arithmetic mean value of a_h values for one hand position on several machines	m/s ²
a_{hd}	declared vibration emission value	m/s ²
s_{n-1}	standard deviation for a test series (for a sample, s)	m/s ²
σ_R	standard deviation of reproducibility (for a population, σ)	m/s ²
C_v	coefficient of variation for a test series	
K	uncertainty	m/s ²

4 Basic standards and vibration test codes

<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>

This part of ISO 28927 is based on the requirements of ISO 20643 and corresponds to its structure in respect of clause subjects and numbering except for the annexes.

Annex A presents a model test report, Annex B the means for determining the uncertainty, K , and Annex C specifies brake devices.

5 Description of the family of machines

This part of ISO 28927 applies to hand-held machines intended for tightening and loosening threaded fasteners. It does not apply to one-shot type impact nutrunners, where a rotating mass is accelerated to a given rotational speed and then connected to the bolt.

Figures 1 to 10 show examples of typical wrenches, nutrunners and screwdrivers covered by this part of ISO 28927.



Figure 1 — Impact wrench/impulse nutrunner with pistol grip



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 28927-2:2009
<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>

Figure 2 — Impact wrench/impulse nutrunner with pistol grip and support handle

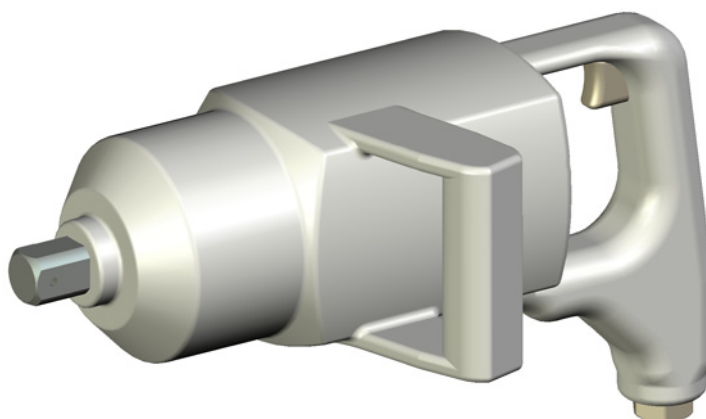


Figure 3 — Impact wrench/impulse nutrunner with bow grip and bow-shaped support handle


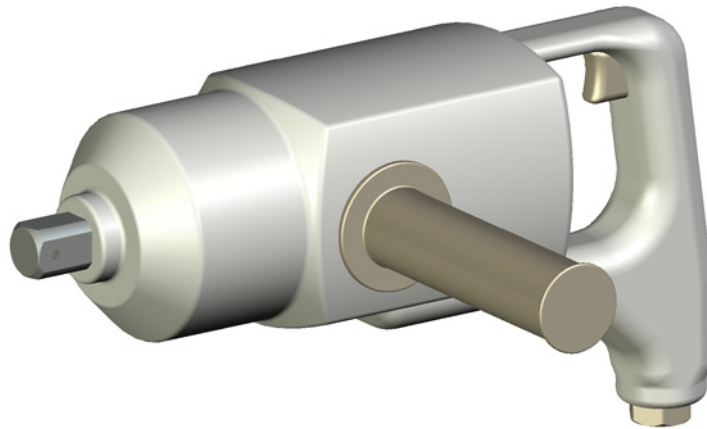


Figure 4 — Impact wrench/impulse nutrunner with bow grip and straight support handle

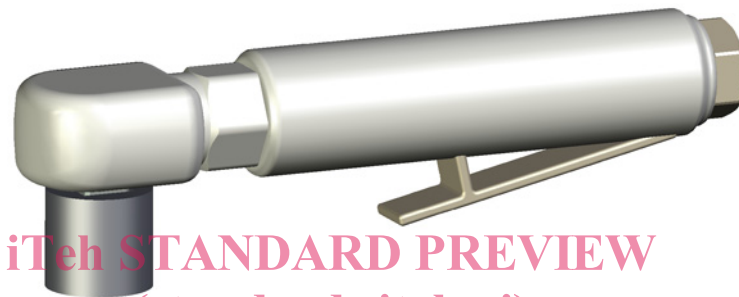

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Figure 5 — Ratchet wrench

ISO 28927-2:2009

<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>

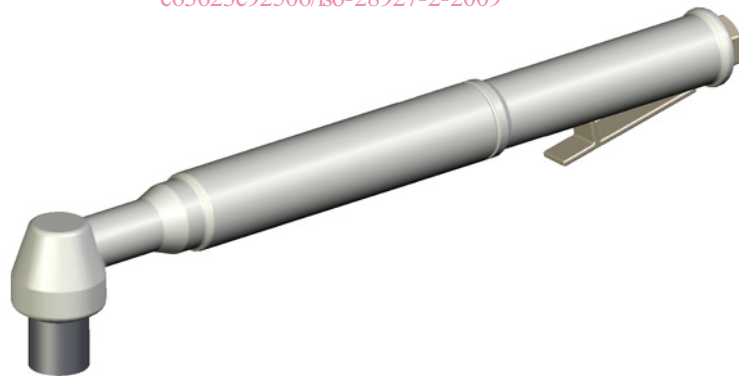


Figure 6 — Angle nutrunner



Figure 7 — Straight screwdriver



Figure 8 — Screwdriver with support handle

iteh STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/9685c208-8484-4f15-9e0f-c63623c92506/iso-28927-2-2009>
ISO 28927-2:2009



Figure 9 — Screwdriver with drill-type pistol grip



Figure 10 — Screwdriver with balanced pistol grip

6 Characterization of vibration

6.1 Direction of measurement

The vibration transmitted to the hand shall be measured and reported for three directions of an orthogonal coordinate system. At each hand position, the vibration shall be measured simultaneously in the three directions shown in Figures 11 to 20.

6.2 Location of measurements

Measurements shall be made at the gripping zones, where the operator normally holds the machine and applies the feed force. For machines intended for one-handed operation, it is only necessary to measure at a single point.

The prescribed transducer location shall be as close as possible to the hand between the thumb and index finger. This shall apply to both hand positions, with the machine held as in normal operation. Whenever possible, measurements shall be made at the prescribed locations.