
Passenger car tyres and rims —

**Part 2:
Rims**

Pneumatiques et jantes pour voitures particulières —

Partie 2: Jantes

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4000-2:2007

<https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4000-2:2007

<https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Designation and marking	1
5 5° tapered (drop-centre) rims	2
5.1 Rim flanges	2
5.2 Rim contours	2
5.3 Rim diameter and hump circumference	5
6 Valve holes	6
6.1 General	6
6.2 Snap-in	6
6.3 Other valves	6
Bibliography	8

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 4000-2:2007](https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007)

<https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4000-2 was prepared by Technical Committee ISO/TC 31, *Tyres, rims and valves*, Subcommittee SC 3, *Passenger car tyres and rims*.

This fourth edition cancels and replaces the third edition (ISO 4000-2:2001), which has been technically revised.

ISO 4000 consists of the following parts, under the general title *Passenger car tyres and rims*:

- *Part 1: Tyres (metric series)*
- *Part 2: Rims*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007>

Passenger car tyres and rims —

Part 2: Rims

1 Scope

This part of ISO 4000 specifies the designation, contour and dimensions of 5° tapered (drop-centre) rims primarily intended for passenger cars.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3911, *Wheels and rims for pneumatic tyres — Vocabulary, designation and marking*

3 Terms and definitions

[ISO 4000-2:2007](#)

For the purposes of this document, the terms and definitions given in ISO 3911 apply.

4 Designation and marking

The rim shall be designated by its nominal rim-diameter code, nominal rim-width code and rim, flange type (e.g. 15 × 6 J or 13 × 5.50 B).

5 5° tapered (drop-centre) rims

5.1 Rim flanges

Recommended rim flange contours are given in Table 1 for the nominal rim diameter codes.


Table 1 — Recommended rim flanges

Nominal rim-diameter code	Rim flange
10	B
12	
13	
14	<p style="text-align: center;">iTeh STANDARD PREVIEW (standards.iteh.ai)</p> <p style="text-align: center;">ISO 4000-2:2007 https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007</p>
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
28	
30	

5.2 Rim contours

Dimensions and tolerances of the rims shall be as given in Figure 1 and Table 2. Optional bead seat contours and their dimensions are given in Figure 2 and Table 3.

Dimensions in millimetres

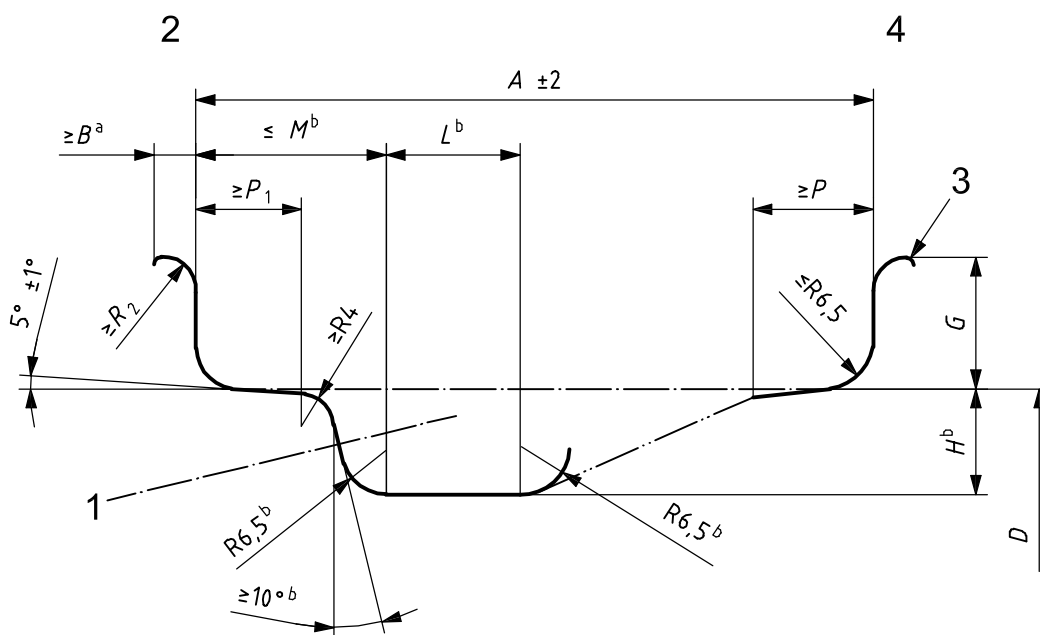

NOTE For use with tubeless tyres, humps are necessary on the mounting side and preferred on the non-mounting side.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Key

- 1 valve hole (see Clause 6)
- 2 vehicle mounting side
- 3 break corner equivalent to 0,5 minimum *R*
- 4 vehicle non-mounting side

ISO 4000-2:2007
<https://standards.iteh.ai/catalog/standards/sist/c4ec7304-eb8e-4fc4-8f8c-fa19b52ad8c1/iso-4000-2-2007>

^a Flange width includes edge radius. The portion of a flange beyond the minimum width shall be lower than the highest point of the flange.

^b These dimensions comprise the minimum well envelope for tyre mounting purposes at *M* max. or less, except for localized areas at the weld or valve hole.

Figure 1 — Contour of 5° tapered (drop-centre) rims

Table 2 — Dimensions of 5° tapered (drop-centre) rims


Dimensions in millimetres

Diameter code	Rim width code and flange type ^c	<i>B</i>	<i>G</i>	<i>P</i>	<i>P</i> ₁	<i>H</i> ^a	<i>L</i>	<i>M</i>	<i>R</i> ₂
		min.	± 1,0	min.	min.	gauge	gauge	max.	min.
10 12 13	3.00 B	10	14,5	13	15	15	16	28	7,5
	3.50 B	10	14,5	15	17	15	19	34	7,5
	4.00 B	10	14,5	15	17	15	19	45	7,5
	4.50 B and wider	10	14,5	19,5	19,5	15	22	45	7,5
14 and greater	3 1/2 J	11	17,5	15	17	17,3 ^b	19	34	9,5
	4 J	11	17,5	15	17	17,3 ^b	19	45	9,5
	4 1/2 J and wider	11	17,5	19,5	19,5	17,3 ^b	22	45	9,5

^a Minimum dimensions for well depth (*H*) and well angle are required for tyre mounting. Larger values may be required to ensure sufficient space for tubeless tyre valve seating.
^b For J-type rims, a deviation to *H* gauge of 17 mm is permitted with a corresponding *M* max. of 43 mm.
^c Dimension *A* = rim width code × 25,4 (rounded to 0,5 mm) (increments of code = 0.5).

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Dimensions in millimetres

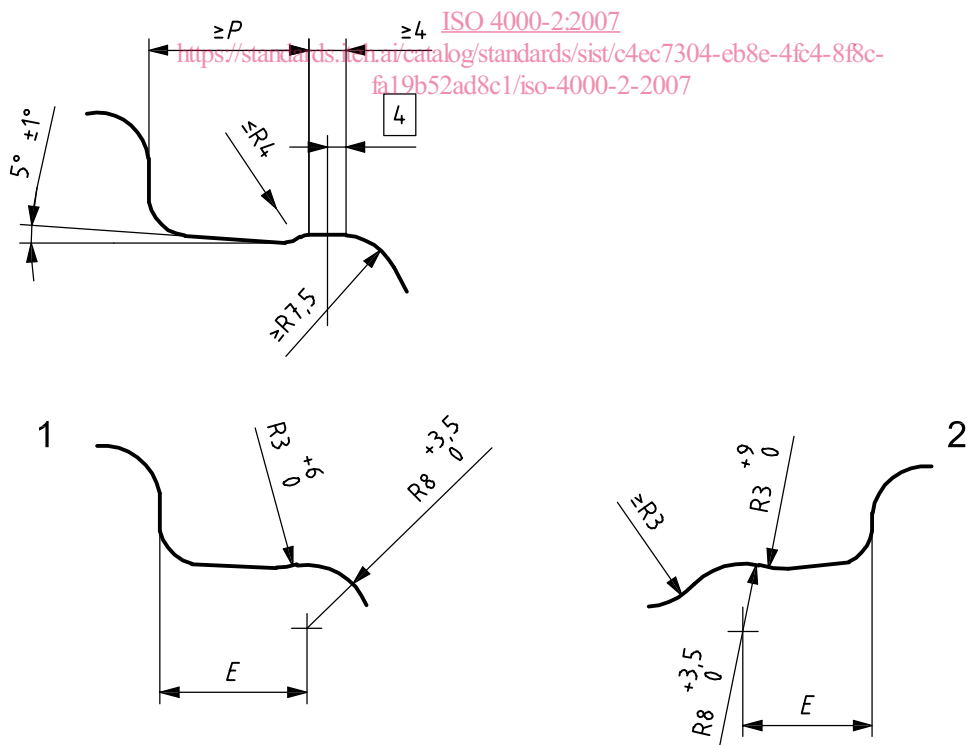

- Key**
- 1 mounting side
 - 2 non-mounting side

Figure 2 — Optional bead seat contours

Table 3 — *E* dimension for round humps (see Figure 2)

Dimensions in millimetres

Rim width code and flange type	<i>E</i>
3.00 B and 3 J	13 min.
3.50 B, 3 1/2 J, 4.00 B, 4 J	16 min.
4.50 B, 4 1/2 J and wider	21,0 $\begin{smallmatrix} +2,0 \\ -0,0 \end{smallmatrix}$ ^a
^a 19,5 $\begin{smallmatrix} +2,0 \\ -0,0 \end{smallmatrix}$ mm permitted for rim widths 4.50 B (4 1/2 J) to 7.00 B (7 J).	

5.3 Rim diameter and hump circumference

The specified rim diameter, *D*, for nominal rim-diameter codes and hump circumferences is given in Table 4.

Table 4 — Specified rim diameter and hump circumference of 5° tapered (drop-centre) rims

Dimensions in millimetres

Nominal rim-diameter code	Specified rim diameter $D \pm 0,4$ ^a	Circumference	
		Flat hump $\begin{smallmatrix} 0,0 \\ -3,5 \end{smallmatrix}$	Round hump $\begin{smallmatrix} 0,0 \\ -3,0 \end{smallmatrix}$ ^b
10	253,2	795,4	797,6
12	304,0	955,0	957,6
13	329,4	1 034,8	1 037,0
14	354,8	1 114,6	1 116,8
15	380,2	1 194,4	1 196,6
16	405,6	1 274,2	1 276,4
17	436,6	1 371,6	1 373,8
18	462,0	1 451,4	1 453,6
19	487,4	1 531,2	1 533,4
20	512,8	1 611,0	1 613,2
21	538,2	1 690,8	1 693,0
22	563,6	1 770,6	1 772,8
23	589,0	1 850,4	1 852,6
24	614,4	1 930,2	1 932,4
25	639,8	2 010,0	2 012,2
26	665,2	2 089,8	2 092,0
28	716,0	2 249,4	2 251,6
30	766,8	2 409,0	2 411,2

^a Tolerance is for tyre design purpose only. The rim measurement is by a circumference-measuring tape related to a mandrel.

^b A tolerance of $\begin{smallmatrix} 0,0 \\ -5,0 \end{smallmatrix}$ mm is permitted on the non-mounting side only.