

---

---

**Intelligent transport systems —  
Communications access for land mobiles  
(CALM) — Satellite networks**

*Systèmes intelligents de transport — Accès aux communications des  
services mobiles terrestres (CALM) — Applications utilisant les réseaux  
satellites*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 29282:2011](https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011)

[https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-  
fb6f791a211/iso-29282-2011](https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011)



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 29282:2011

<https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

<b>Contents</b>	<b>Page</b>
Foreword .....	iv
Introduction .....	v
1 Scope .....	1
2 Conformance .....	1
3 Normative references .....	1
4 Terms and definitions .....	2
5 Abbreviated terms .....	2
6 Background .....	3
6.1 Proprietary connectivity protocols .....	3
6.2 Internet connectivity .....	5
7 Requirements .....	5
7.1 General .....	5
7.2 Adoption of satellite standards and internationally adopted practices .....	6
7.3 CALM architecture and application grouping .....	6
7.4 CALM networking protocols .....	6
7.5 CALM medium service access points .....	6
7.6 CALM “ITS station management” .....	6
7.7 CALM using public wireless networks .....	7
7.8 Establishment and termination of medium specific sessions .....	7
7.9 Interface medium management .....	7
8 Medium access control (MAC) .....	7
8.1 Conformance .....	7
8.2 CALM satellite communications MMAE service primitives .....	7
8.3 Satellite communication MMAE .....	8
8.4 CALM session connection .....	10
8.5 CALM session disconnection .....	10
8.6 Change of satellite communications connection state .....	10
8.7 Retrieval of medium status .....	11
8.8 Satellite communications specific connection aspects .....	11
8.9 Satellite communications session disconnection .....	12
9 Test and conformance requirements .....	12
10 Declaration of patents and intellectual property .....	12
Bibliography .....	13

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 29282 was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 29282:2011](https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011)

<https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011>

## Introduction

This International Standard is part of a family of International Standards based on the communications access for land mobiles (CALM) concept. These International Standards specify a common architecture, network protocols and communication interface definitions for wireless communications using various access technologies including cellular 2nd generation, cellular 3rd generation, satellite, infra-red, 5 GHz microwave, 60 GHz millimetre-wave and mobile wireless broadband. These and other access technologies that can be incorporated are designed to provide broadcast, unicast and multicast communications between mobile stations, between mobile and fixed stations and between fixed stations in the intelligent transport systems (ITS) sector.

CALM standards are explicitly designed to enable quasi-continuous communications as well as communications of protracted duration between vehicles and service providers, and between vehicles.

The fundamental advantage of the CALM concept over traditional systems is the ability to support media independent handover (MIH), also referred to as heterogeneous or vertical handover, between the various media supported by CALM (e.g. cellular, microwave, mobile wireless broadband, infra-red, DSRC, and satellite). The CALM concept supports selection policies that include user preferences and media capabilities in making decisions as to which medium to use for a particular session, and when to hand over between media or between service providers on the same medium. These handover mechanisms are defined within the CALM architecture International Standard, ISO 21217, the CALM IPv6 networking protocols International Standard, ISO 21210, the CALM medium service access points International Standard, ISO 21218, and the CALM station management International Standard, ISO 24102. Handovers between access points using the same technology and service provider use mechanisms that are defined within the particular medium-specific CALM standard.

Satellite communications provide very broad coverage and are particularly useful in areas where there is no terrestrial wireless communications coverage, or when such systems are overloaded or have poor coverage. As satellite systems evolve, these systems may provide an alternative communication route in many situations. CALM station management will be able to ensure that the most appropriate network, of those available, will be used to improve ITS availability and reliability at the minimum cost. Example applications include urgent emergency messages such as eMessage or eCall, where an eCall over cellular radio may not be possible at the site of an accident, because of lack of cellular coverage.

Satellite communications systems will also be able to provide infill coverage where the deployment of the CALM M5 infrastructure set out in ISO 21215 is incomplete. Furthermore, satellite communications that support IPv6 broadcast mode will also support the geo-networking protocols that are currently being developed and standardized.

Additionally, satellite systems may be installed at ITS stations primarily because of the broadcast and paging services that they can deliver to support applications and the management of connections. The interface for broadcast satellite communications is defined in ISO 13183, using a protocol which is common to all of the broadcast media.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 29282:2011

<https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011>

# Intelligent transport systems — Communications access for land mobiles (CALM) — Satellite networks

## 1 Scope

This International Standard provides definitions and procedures for the establishment, maintenance and termination of an ITS (intelligent transport systems) communications session within a CALM (communication access for land mobiles) system environment using bi-directional satellite communications.

It defines the operation of the medium management adaptation entity (MMAE), which provides the management interface between a proprietary satellite communications medium and the “ITS station management”. This enables the “ITS station management” to know the status of the communications medium and control the interface without the need for applications at the ITS station to have any knowledge of the satellite communications interface. The procedures that the “ITS station management” expects to use are also explained.

NOTE 1 CALM links are required for quasi-continuous, prolonged and short-duration communications between vehicles and the roadside, between vehicles, and between mobile equipment and fixed infrastructure points, over medium and long ranges.

This International Standard defines how to connect and disconnect a communication session using satellite communication systems in the context of an application operated within the environment defined in ISO 21217. It supports peer-to-peer modes of communication. Support for broadcast satellite systems is defined in ISO 13183, which provides a common approach for all broadcast media. It supports satellite communications networks that are interconnected with the public network, as well as those which connect via the internet and those which provide a stand-alone capability.

NOTE 2 As there are multiple instantiations of satellite systems, most of which are not interoperable, there is the possibility of several simultaneous satellite sessions, each forming a separate CALM medium (although the differences may only be in software within the on-board equipment).

Wherever practicable, this International Standard has been developed by reference to suitable existing standards, adopted by selection. Application-specific upper layers are not included, but will be driven by application standards (which may not be technology-specific).

## 2 Conformance

In order to conform with this International Standard, communications using satellite communications protocols shall be established in full compliance with local telecommunications procedures and protocols and shall comply with the requirements of ISO 21210, ISO 21217, ISO 21218, ISO 24102 and ISO 25111. See Clause 3.

NOTE 1 ITU-T standards for satellites mostly relate to traditional telecommunications services such as voice, X21 and X25. In general, satellite services are delivered as closed proprietary solutions with standardized external interfaces, including ITU-T V.24 (EIA-232/RS-232), ITU-T V.11 (EIA-422/RS-422), ITU-T V.35 (EIA-449/RS-449), EIA-530/RS-530, ITU-T X-21 and EIA-423/RS-423. Such systems are not recommended for integration into ITS because of the need to provide adaptation to support IP communications.

NOTE 2 IPv6 systems are now being developed but have not yet been standardized. This interface International Standard has been developed to be consistent with these emerging new services.

## 3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21210, *Intelligent transport systems — Communications access for land mobiles (CALM) — IPv6 Networking*<sup>1)</sup>

ISO 21217, *Intelligent transport systems — Communications access for land mobiles (CALM) — Architecture*

ISO 21218, *Intelligent transport systems — Communications access for land mobiles (CALM) — Medium service access points*

ISO 24102, *Intelligent transport systems — Communications access for land mobiles (CALM) — Management*

ISO 25111, *Intelligent transport systems — Communications access for land mobiles (CALM) — General requirements for using public networks*

## 4 Terms and definitions

For the purposes of this document the terms and definitions given in ISO 21217 and the following apply.

**4.1 CALM application session**  
association of two or more parties for the provision of CALM application service, which, until its termination, can involve more than one communication session in order to exchange information (i.e. are involved in a transaction)

NOTE 1 A CALM application session is not possible unless a communication session (4.2) is first established.

NOTE 2 An application session will normally involve multiple bidirectional transfers of data, but can be a unidirectional transfer of data.

[ISO 25111]

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

**4.2 communication session**  
association of two or more wireless communication devices between which a functional wireless communication link is available for mutual exchange of data/information

NOTE Application sessions (see 4.1) engage in and complete transactions using communication sessions.

[ISO 25111]

## 5 Abbreviated terms

CALM	communications access for land mobiles
CI	communication interface
CMPL	communication module protocol layer
DSRC	dedicated short range communication
ETSI	European Telecommunications Standards Institute
FSS	fixed satellite services
GEO	geostationary earth orbit
GNSS	global satellite navigation system
GSM	global system for mobile communications
IN-SAP	interface service access point (formerly “C-SAP”)
IPv4	internet protocol version 4

1) To be published.



IPv6	internet protocol version 6
ITS	intelligent transport systems
LEO	low (altitude) earth orbit
MAC	medium access control
MEO	medium (altitude) earth orbit
MI-SAP	management service access point (formerly “M-SAP”)
MMAE	medium management adaptation entity
MSS	mobile satellite services
MSS/ATC	mobile satellite services with ancillary terrestrial components
PCS	personal communications service
SAP	service access point
SAR	search and rescue

## 6 Background

### 6.1 Proprietary connectivity protocols

Satellite communications systems are implemented in a variety of ways, delivering different characteristics. It is useful to have an overview of these implementations and their characteristics because these will affect the way that CALM applications will use these systems. This will therefore affect the design of CALM systems that use satellite communications.

Geostationary earth orbit (GEO) satellites orbit over the equator at the same rotation rate as the earth, so appear to be stationary above the equator (35,786 km above the earth's surface). A set of satellites at fixed positions ensure that all longitudes can be covered; however, coverage at higher latitudes is limited, with significant obstruction possible in urban areas and rural areas with obstructions such as trees.

Non-GEO satellites may be at low (LEO) or medium height (MEO) above the earth. Non-GEO satellites have orbits offset to the equator, giving much better coverage at higher latitudes. Continuous coverage and availability are possible if there are sufficient orbits and satellites. Store and forward techniques need to be used if there are insufficient satellites to give continuous availability. MEO satellites operate with an orbit time of between 2 h and 12 h. The advantages of the lower and faster orbit is that the satellite is closer to the ground and therefore has less path loss, and potentially a smaller coverage footprint, which allows more frequency reuse and therefore higher capacity for a given spectrum allocation. However, these systems do require more satellites to give the required availability and introduce an additional overhead in the management of the handover of sessions from one satellite to the next. Note that this complexity is handled in the receiver and is not visible to CALM systems, except that any impact on instantaneous availability would be reported to the “ITS station management” using the interface and protocols defined in ISO 21218.

Additionally, highly elliptical orbits offer the advantage that the satellites spend a significant proportion of their time at high altitude at a point which can be set to be above the main area where coverage is required. Coverage of a large area (or continent) can be achieved by several satellites spaced in the orbit such that the traffic is passed from one satellite to the next.

Satellites may be optimized for fixed or mobile services. Fixed systems typically have a larger antenna with higher gain, which allows a higher bandwidth.

Some satellite system service providers also operate ancillary terrestrial components, otherwise known as complimentary ground components, where the satellite transceiver will switch automatically to use a terrestrial wireless service typically provided by a third party operator (e.g. GSM/PCS). This has some similarity to the

heterogeneous handover that is provided by CALM, but is implemented as a proprietary solution that typically provides a single alternative medium, via a commercial arrangement provided by the satellite service operator.

Commercial satellite services all rely upon proprietary protocols to handle data communications within their system. Interworking between systems is not supported. Only the interface between the satellite transceiver and the CALM station is standardized.

The following are examples of satellite telecommunications systems to which this International Standard is applicable<sup>2)</sup>.

- a) MSS (GEO):
  - 1) Aces;
  - 2) Inmarsat;
  - 3) Thuraya;
  - 4) Solaris S-Band;
  - 5) Inmarsat S-Band.
- b) MSS (non-GEO):
  - 1) Galileo (SAR);
  - 2) Globalstar;
  - 3) Iridium IS.
- c) Store and forward (non-GEO):
  - 1) Argos;
  - 2) ORBCOM.
- d) MSS/ATC:
  - 1) ICO GLOBAL;
  - 2) Mobile Satellite Ventures (MSV);
  - 3) Terrestar Networks.
- e) FSS:
  - 1) Eutelsat;
  - 2) HYLAS;
  - 3) IP STAR;
  - 4) SES Astra;
  - 5) Telesat/Wildblue.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

<https://standards.iteh.ai/catalog/standards/sist/dc9418cf-b5c3-4d1e-be08-fb6f791a211/iso-29282-2011>

NOTE There are many satellites that provide broadcast services. Typically, these are primarily for entertainment and carry either video or audio or, additionally, GNSS. The interface to these systems is the subject of ISO 13183.

---

2) This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of these products.

## 6.2 Internet connectivity

Satellite systems that support IPv4 and IPv6 are becoming available.

IPv6 communications can be supported either by transmitting IPv6 packets encapsulated into IPv4 packets (when IPv4 support is provided) or natively. The satellite link will be seen as an *IPv6 egress interface* from the point of view of the IPv6 networking layer specified in ISO 21210.

Satellite systems implementing IPv6 broadcast mode will be able to support geo-networking protocols that are being defined within ETSI as an extension to the IPv6 networking defined in ISO 21210.

For satellite telecommunications systems that support internet connectivity, conformance shall be as determined in the system specifications.

NOTE At some point in the future, a conformance standard for the generic aspects may be developed, but at present this is beyond the scope of this International Standard.

## 7 Requirements

### 7.1 General

The efficient connection of a satellite communications system into a CALM station requires compliance with a number of related International Standards.

The overall CALM architecture set out in ISO 21217 defines how the individual standards operate together to deliver the total functionality. An abstraction of the total architecture is shown in Figure 1, which shows only the modules that the satellite communications system has direct interaction with, and identifies the corresponding International Standards.

Requirements from each of these International Standards are considered in the following subclauses, together with consideration of the need to interface to a diverse range of proprietary satellite systems.

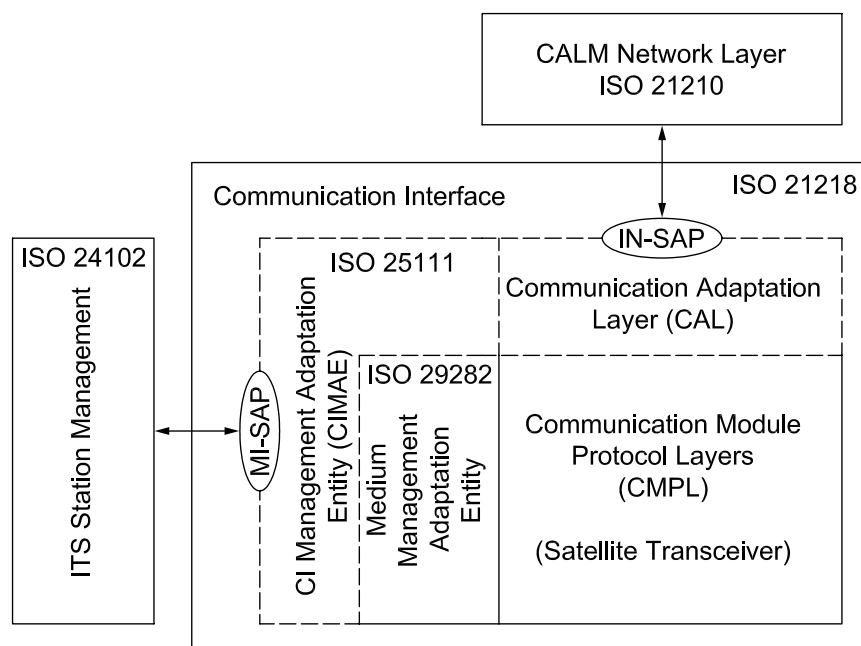


Figure 1 — Interdependency in CALM standards (adapted from ISO 21218:2008, Figure 1)